



Hahnemühle



Filter Papers & Membranes

Industry & Laboratory | Product Profile & Application





About Us

As a globally operating company, Hahnemühle is focusing on the production of custom-made filter papers, in addition to the standard product range for laboratories. Our papers are known as reliable products on the market, which always provide reproducible filtration results. Many years of expertise, internal research & development and constant exchange of ideas with customers make us a reliable partner. Our development team adapts papers according to customer preferences for sensitive areas of application, even for new formulas with functional fibres. With over 150 filter papers, we offer our customers a wide spectrum of papers that cover almost all filter requirements.

Clientele

Leading companies from different fields put their trust in our products. They operate in different industries e.g. the food and beverage industry, the pharmaceutical and chemical industry, and agriculture, environmental monitoring and automotive engineering.



**Paper made by
Hahnemühle**

Strength

Our strength is close cooperation with our customers in every project phase – from development to production, to the end product. We think in terms of networks, with the necessary eye for detail. Our internal structure allows us to react quickly to changes and to adapt to new requirements. Our production systems also allow the manufacture of smaller quantities at attractive prices.

History of Hahnemühle

- 1584 Establishment of Hahnemühle
- 1883 Filter papers produced for the first time
- 1886 Carl Hahne buys the paper mill, which subsequently bears his name
- 1927-2004 Hahnemühle was part of the 'Schleicher & Schuell' group
- 2008 Pure filter papers are marketed directly under the Hahnemühle name



Hahnemühle
Type 589/2 Sorte 589/2
Quantitative Filter Paper
medium-fat filter circles
Quantitatives Filterpapier
mittelfett, kreisförmig
DP 5892 047
Ø 47 mm 100 units / Stück
Batch: X 125.881
Hahnemühle Produkt GmbH, Hahnemühle 1
17084 Gabel, 0384361

Hahnemühle
DP 5893 070
Type 589/3 Sorte 589/3
Quantitative Filter Paper
Hahnemühle

Hahnemühle
DP 5895 125
Type 589/5 Sorte 589/5
Quantitative Filter Paper
Hahnemühle



Our product range for laboratories

Hahnemühle offers a globally recognised range of premium filter papers.

We laid the foundation for our success with the development and production of grades 589/1 to 589/6.

Our filter papers are produced for both liquid and air filtration technologies in various areas of application. The premium quality pulp, cotton linters, glass and quartz fibre raw materials are suitable for all laboratory and industrial applications.

Our portfolio includes:

- Filter papers made from cellulose, glass fibre and quartz fibre for quantitative and qualitative analysis and particle removal
- Extraction thimbles and crucibles made from cellulose, glass fibres and quartz fibres
- Germination test papers in line with ISTA guidelines
- Blotting papers
- Chromatography paper
- Paper for surface protection
- Antibiotic test papers
- Paper for beer analysis
- pH indicator papers

The microfiltration range includes syringe and membrane filters for the reliable separation of microorganisms and particles in liquids, air and other gases.

Clarifying and sterile filtration, sample preparation, sterile aeration and medical applications are just some of the areas where disposable filter holders are typically used. They are available in different pore sizes and with different hydrophilic or hydrophobic membranes:

- Sterile and unsterile syringe filters with CA, CR, PTFE and NY membranes

We offer different membrane filters with pore sizes from 0.2 µm – 8 µm for particle removal or for the collection of microorganisms from solutions to be examined. From clarification and sample preparation, sterile filtration, air filtration and aeration to microbiological control.

- Sterile and unsterile membrane filters in AC, NC, MCE, PTFE and NY

Contents

	Page		Page
Beverages		Filter papers	
• Juice	11	• Ashless filter papers for quantitative analysis	57
• Wine	13	• Hardened ashless filter papers	59
• Beer, malt and beer-based beverages	15	• Highly pure filter papers for qualitative analysis	61
Food		• Hardened highly pure filter papers for qualitative analysis	65
• Cooking oil and fat	17	• Glass fibre filters	67
• Sugar	19	• Quartz fibre filters	71
• Milk and milk products	21	• Universal filter papers for clarifying filtration	73
• Meat and meat products	23	• Filter papers for technical and industrial use	74
Agriculture		• Low nitrogen filter paper	79
• Soil and fertiliser	25	• Kieselguhr filter papers	79
• Animal feed	27	• Activated carbon filter paper	81
• Germination testing	29	• Black filter paper	81
Environmental analysis		• Filter papers for malt and beer analyses	83
• Air pollution	31	• Filter papers for the sugar industry	83
• Emission control	33	• Cellulose extraction thimbles	85
• Water	35	• Glass fibre thimbles	87
• Waste products	37	• Blotting papers	89
Chemicals		• Antibiotic test papers	91
• Quality control	39	• Absorbent paper with polyethylene layer	93
• Cleaning materials	41	• Chromatography papers	95
• Oil refinery	43	• Germination test papers	97
• Cement analysis	45	• Weighing paper	99
		• Lens cleaning paper	99
Pharmaceuticals – Diagnostics			
• Production and quality control of pharmaceuticals	47		
• Papers for diagnostic test strips	49		
• Indicator and reagent papers for impregnation (raw papers)	51		
• Diagnostics	53		



	Page		Page
Membranes		Product selection	
• Cellulose acetate membrane filters	101	• Filter papers for analysis	119
• Cellulose nitrate membrane filters	103	• Filter papers at a glance	121
• Mixed cellulose ester membrane filters	105	• OEM – products based on user requirements	123
• Nylon membrane filters	107	• Membranes	124
• PTFE membranes filters	109	• Quality and testing methods Quality concept and test criteria	126
Syringe filters		Chemical resistance	
• Cellulose acetate syringe filter	111	• Membranes	130
• Regenerated cellulose syringe filters	113	• Syringe filter	132
• Nylon syringe filters	115		
• PTFE syringe filters	117	• Index ... Order numbers ... Grades	134



Products by area of application



Beverages

Beverages are one of the most controlled grocery products. Quality is increasingly important in conscious and sustainable consumption. During the development of analytical methods in the labs of drinks manufacturers, several of our high-quality filter grades for analysis and strict monitoring held firm and proved their worth. In the publication 'Analytical Methods in Brewing - Wort, Beer and Beer-Based Beverages', published by the Middle European Brewery Analysis Commission (MEBAK), these grades were recommended for specific detection reactions.

- Juice
- Wine
- Beer



Food

The most important factors in maintaining customer loyalty are trust, security and transparency. For the required quality assurance and raw material control, knowledge about the composition of foodstuffs is essential.

Here you will find products that enable highly sensitive detection of ingredients and contaminants in food analysis and filter grades which are suitable for process filtration of food due to their purity. For certain grades, we can confirm the conformity with U.S. FDA recommendation 21 CFR and the German BfR recommendation XXXVI and XXXVI/1.

- Edible oil
- Sugar
- Milk and milk products
- Meat and meat products



Agriculture

The determination of nutrients and trace elements is important to optimise plant and animal growth. The average ash content of our filter papers was adjusted to meet these high standards in chemical analysis. The special conditions for germination testing are established by the stringent ISTA provisions. The Hahnemühle germination test papers comply with these international provisions and permit reliable assertions regarding the germination capacity of seed.

- Soil and fertiliser
- Animal feed
- Seed



Environment

An optimum filter material simplifies and supports contamination-free sampling of suspended particles in water and particles in emissions or chemicals. Owing to their consistent performance, our pure filter papers are ideally suited to situations where unambiguous analytical results are required. Our filter papers are a reliable tool in all areas subject to strict official requirements (DIN, EPA, ASTM, etc.).

- Air pollution
- Emission control
- Water
- Waste products



Chemicals

Every chemical reagent and pharmaceutical substance is only as good as its quality. Highest quality standards are the key driver of success for any company in the areas of chemicals and pharmaceuticals. The quantitative filter papers of Hahnemühle are the purest paper in the filter market. The average ash content is between 0.004%, and 0.002%.
- The purest paper in the filter market.

- Quality control
- Detergents
- Oil refinery
- Cement analysis



Pharmaceuticals - Diagnostics

Materials for producing pharmaceuticals, diagnostic tools and molecular biology tools have to meet very specific characteristics. The Hahnemühle absorbent media guarantee both high and consistent performance. The purest raw materials are used to produce these filters, thus avoiding interactions between the reagents spread in the finished test strips.

- Production and quality control of pharmaceuticals
- Papers for diagnostic test strips
- Papers for impregnation
- Diagnostics



The average ash content of our quantitative papers is 0.004%, or 0.002% ash for the hardened quantitative papers. The purest paper in the filter market!



Beverages

Juice

Target application:

- Analysis of ingredients, contaminants and microbiological purity according to the § 64 LFBG German law for food, feed and utensils
- Particle separation and clarification before optical measurements
- Sample preparation before sensitive analyses such as HPLC

Process filtration:

The pure raw materials – linters and cellulose – are used in the production of these filter papers, which allow their use with food and beverages during production. For selected grades with different retention rates, the conformity to both the U.S. FDA recommendation 21 CFR and by the German BfR (Federal Institute for Risk Evaluation) recommendation XXXVI and XXXVI/1 can be approved.

Process	Technique	Type of Filter	Filter grade
Particle separation	Filtration (funnel/Büchner)	Filter paper for fast clarification of unsweetened juices	0858
		Filter paper for fast clarification of sweetened juice, viscous juice	0905
		Filter paper for qualitative analysis, low ash according to § 64 LFBG	604, 597, 595 593, 602h, 602eh
HPLC	Clarification of aqueous samples	0.2 µm cellulose acetate syringe filters	SAC 020
		0.2 µm cellulose acetate membranes	AC 020
	Clarification of organic samples	0.2 µm nylon syringe filters	SNY 020
		0.2 µm nylon membranes	NY 020
Filtration of mobile phase	0.45 µm nylon membranes	NY 045	
Clarification of juices	0.45 µm cellulose acetate syringe filters Cellulose acetate membrane	SAC 045	
		AC045	
Microbiological analysis	Retention of microorganisms	White, sterile membranes cellulose nitrate 0.2 and 0.45 µm, gridded	NCS 045 NCS 020
		White, sterile membranes mixed cellulose ester, 0.2 and 0.45 µm, gridded	MCES 045 MCES 020
Spectrophotometry	Clarification of samples	Glass microfibre filters	GF 6, GF 55
Preparing fruit juice samples for photometric measurements (e.g. phosphate) according to § 64 LFBG	Filtration (funnel/Büchner)	Quantitative filter paper	589/1
Protection of apparatus and surfaces	Absorption	Absorbent paper with polyethylene layer	295 PE

Production	Type of Filter	Filter grade
Protective papers in filter presses	Medium-fast, wet strength, creped	2048, 2410
	Very slow, high wet strength (hardened)	1577
Papers and cards	Very fast, wet strength	1450nf
	Medium-fast, wet strength	3605, 572, 3205
Creped papers	Very fast, wet strength, thick	520bII, 520b, 3144L
	Very fast, wet strength	520a

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.



Folded filters or creped filter papers are particularly suitable for quickly clarifying samples owing to the larger surface.



Beverages

Wine

Target application:

- Analysis of ingredients, contaminants and microbiological purity according to § 64 LFBG German law for food, feed and utensils
- Particle separation and clarification before optical measurements

Process filtration:

Depending on the type of contamination, various retention rates are available for wine clarification.

For selected grades, the conformity to both the U.S. FDA recommendation 21 CFR and by the German BfR recommendation XXXVI and XXXVI/1 can be approved.

Process	Technique	Type of Filter	Filter grade
Analysis of acids (sep. of malic acid)	Paper chromatography (malolactic fermentation)	Chromatography paper	3469, 2043 a
Particle separation	Filtration (funnel/Büchner)	Filter paper for qualitative analysis	604, 597, 595, 593 602, 602eh
	Preparation of samples (i.e. for L-Ascorbic acid analysis)	Grained paper for clarification of unsweetened juice Creped filter paper for sweetened, viscous juice	0858 0905
	Separation of PVPP (E1202)	Filter paper for clarification	400, 0858 as folded filters
	Separation of active carbon (E1202)		
	Removal of turbidity	Low ash filter paper	602h
Gravimetric analysis	Measurement of ashes	Filter paper for quantitative analysis	589/3
Determining particle load	Separation of particles in suspensions	0.8 µm cellulose nitrate membrane	NC 080
HPLC	Clarification of aqueous samples	0.45 µm cellulose acetate syringe filters	SAC 045
		0.45 µm cellulose acetate membranes	AC 045
Colour characteristics	Clarification of grape must / wine	0.45 µm cellulose acetate syringe filters	SAC 045
Spectrophotometry	Protection of the apparatus	0.45 µm cellulose acetate membranes	AC 045
Microbiological analysis	Detection of microorganisms	White, sterile cellulose nitrate membranes or mixed cellulose esters with grid, 0.2 and 0.45 µm	NCS 045, NCS 020 MCES 045, MCES 020
Sample preparation	Pre-filtration	Glass microfibre filters	GF 51

Production	Type of Filter	Filter grade
Clarification of sweetened, viscous wines Papers and cards	Fast, wet strength	1450nf
	Medium-fast, wet strength	3205
	Creped, fast, wet strength	520a, 3144L, 520bII, 520b
Filtration of unsweetened wines	Fast, wet strength	572, 3205
	Grained, fast, wet strength	0858
	Creped, fast, wet strength	2048

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.



Over the course of development in brewery analytics, certain paper grades have become a fixture in 'methods of analysis in brewing'. High-quality Hahnemühle filter papers are listed in the collection of methods produced by the Middle European Brewery Analysis Commission (MEBAK).



Beverages

Beer, malt and beer-based beverages


Target application:

- Analysis of ingredients, contaminants and microbiological purity according to § 64 LFBG German law for food, feed and utensils
- Ideal for sample preparation and clarification. Useful for removing CO₂ and turbidities
- Measurement of nitrogen compounds, proteins and trace elements

Process ¹⁾	Technique	Type of Filter	Filter grade
Sample preparation for extract determination of malt	Filtration, funnel (Büchner)	Filter paper for clarification, grained	0858, 2555
Removal of CO ₂ and turbidities from beer, wine and juices		Filter paper for qualitative analysis	602h, 597
Determination of solids in wort (Labor Veritas method)			GF 52
Filtration of lees			597, GF52
Determination of the coagulateable proteins			597
Determination of the grade of fermentation			597
Sample preparation			595
Determination of solids and turbidity (Feld method)		Filter paper for quantitative analysis	589/1
Determination of nitrogen-compounds by phosphor molybdenum precipitation			589/2
Determination of carbohydrates by hydrolysis			589/2
Analysis of ash content in foodstuffs according to §35 LMBG			589 /1
Determination of proteins in wort and beer via MgSO ₄ precipitation			589 /1 589 /2
Drinking water: Determination of chemical elements, radioactive trace elements	Filtration, funnel (Büchner)	Filter paper for quantitative analysis	589/3
Measurement of nitrogen	Quantification of nitrogen	Weighing paper, low in nitrogen	360
Spectrophotometry	Colour of the malt	White cellulose acetate membranes with grid, 0.45 µm	AC 045
Microbiological analyses	Microorganism count	Black, sterile cellulose nitrate membranes with grid, 0.45 µm	NCS 045

1) In the instructions in 'Analytical methods in breweries - Wort, Beer, beer-based Beverages', published by the Middle European Brewery Analysis Commission (MEBAK).

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.

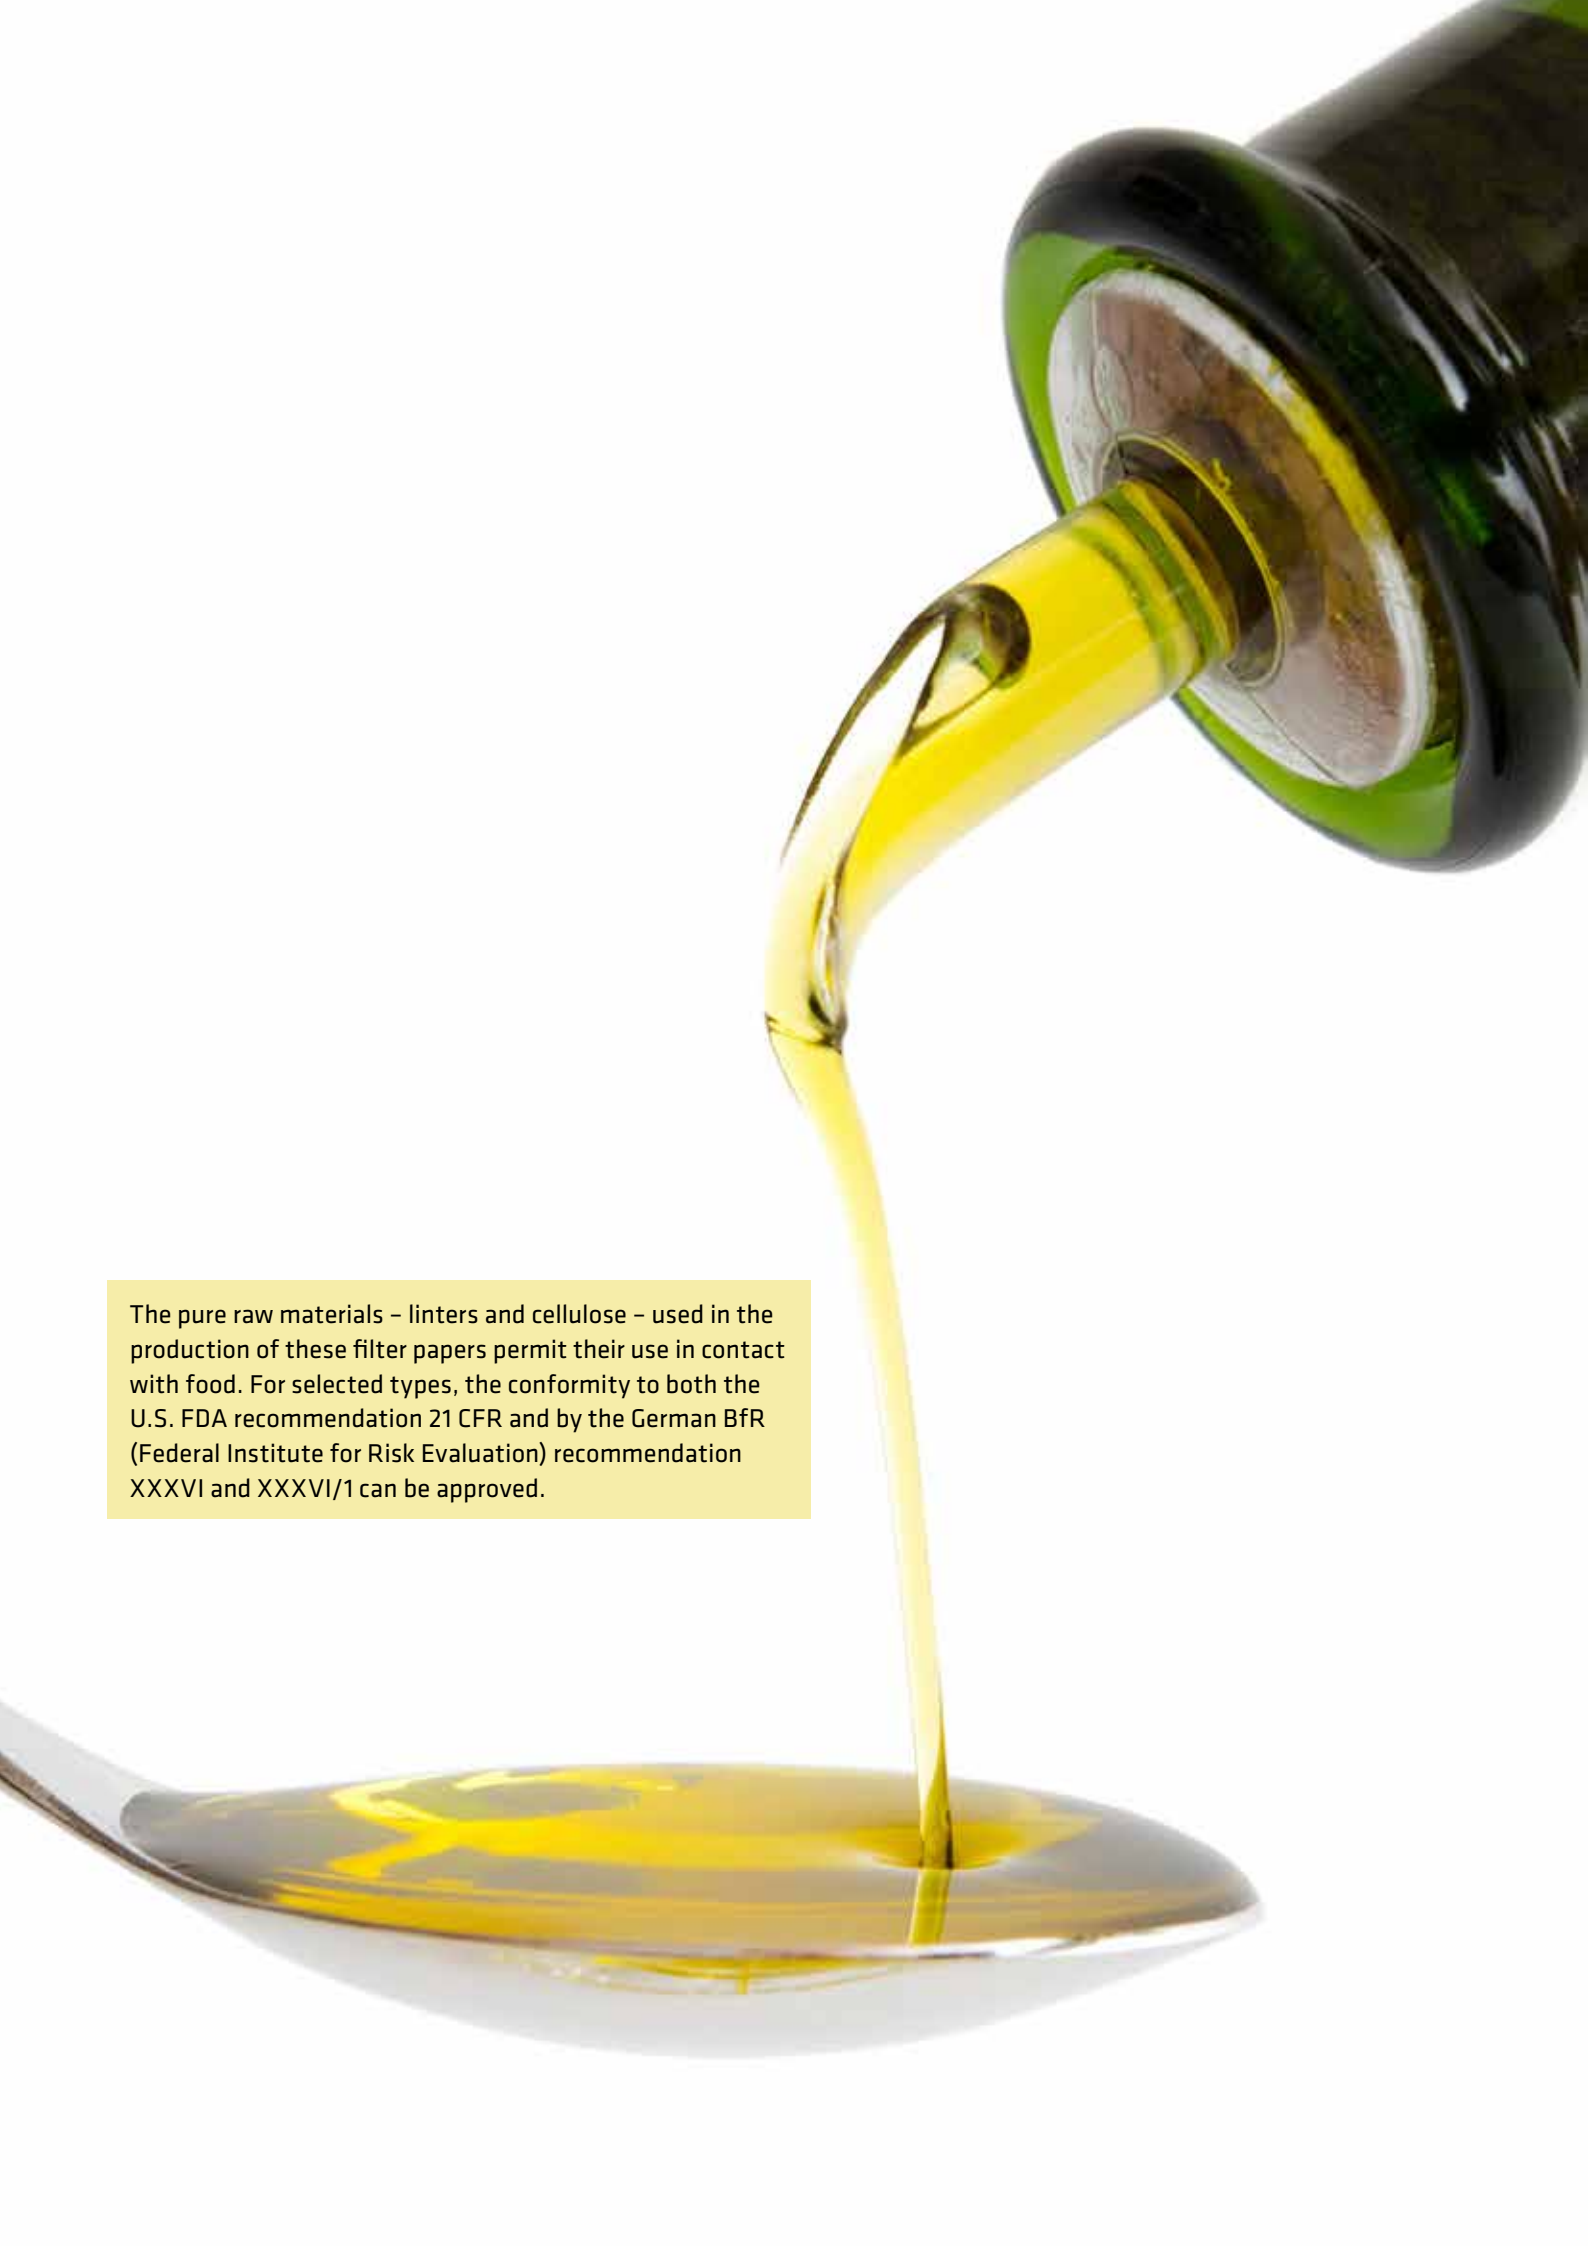

The pure raw materials – linters and cellulose – used in the production of these filter papers permit their use in contact with food. For selected types, the conformity to both the U.S. FDA recommendation 21 CFR and by the German BfR (Federal Institute for Risk Evaluation) recommendation XXXVI and XXXVI/1 can be approved.



Food

Edible oil and fat

Target application:

- Analysis of ingredients, contaminants and microbiological purity according to § 64 LFGB German law for food, feed and utensils.

Process filtration:


- The papers listed are suitable for use in filter presses
- Clarification and purification of edible oils in line with the provisions of the German LFGB § 64
- Regeneration of lubricating oils, transformer and turbine oils
- Removal of turbidity and particles from used oil in fryers

Process	Technique	Type of Filter	Filter grade
Measurement of fats	Extraction with Soxhlet or Tecator	Cellulose extraction thimbles	900, 901
Particle separation	Clarification of essential oils	Filter paper for extra-fast filtration	3205, 1450nf
	Clarification of edible oils	Filter paper for very fine particles	BF
Analysis in line with § 64 LFGB	Filtration (funnel/Büchner)	Filter paper for qualitative analysis	604
Determination of the unsaponifiable fraction in fats	Filtration (funnel/Büchner)	Filter paper for qualitative analysis	597, 595
Analysis of oil/fats	Fat extracting equipment	Filter paper with very high wet strength	1574
		Filter paper for quantitative analysis	589/5
Quantifying particles using gravimetry	Separation of solids in oil with petrol ether	Absorptive, dense paper	602h
HPLC	Clarification of organic samples	0.2 µm nylon syringe filters	SNY 020
		0.2 µm nylon membranes	NY 020
	Filtration of mobile phase	0.45 µm nylon membranes	NY 045
Protection of apparatus and surfaces	Absorption	Absorbent paper with polyethylene layer	295 PE

Production	Type of Filter	Filter grade
Clarification and Purification	Fast, creped, for large particles	3144L, 2410
	Medium, creped, for small particles	610
	Fast, for coarse particles	1450nf
	Medium, for small particles	22, 2589c, 3605
	Slow, for small particles	2589d
Removal of particles from used oil in fryers	Very fast, wet strength	3144L, 1450nf

Note: The recommended grades for edible oils can even be used for technical oils with similar viscosity and particle properties.

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.

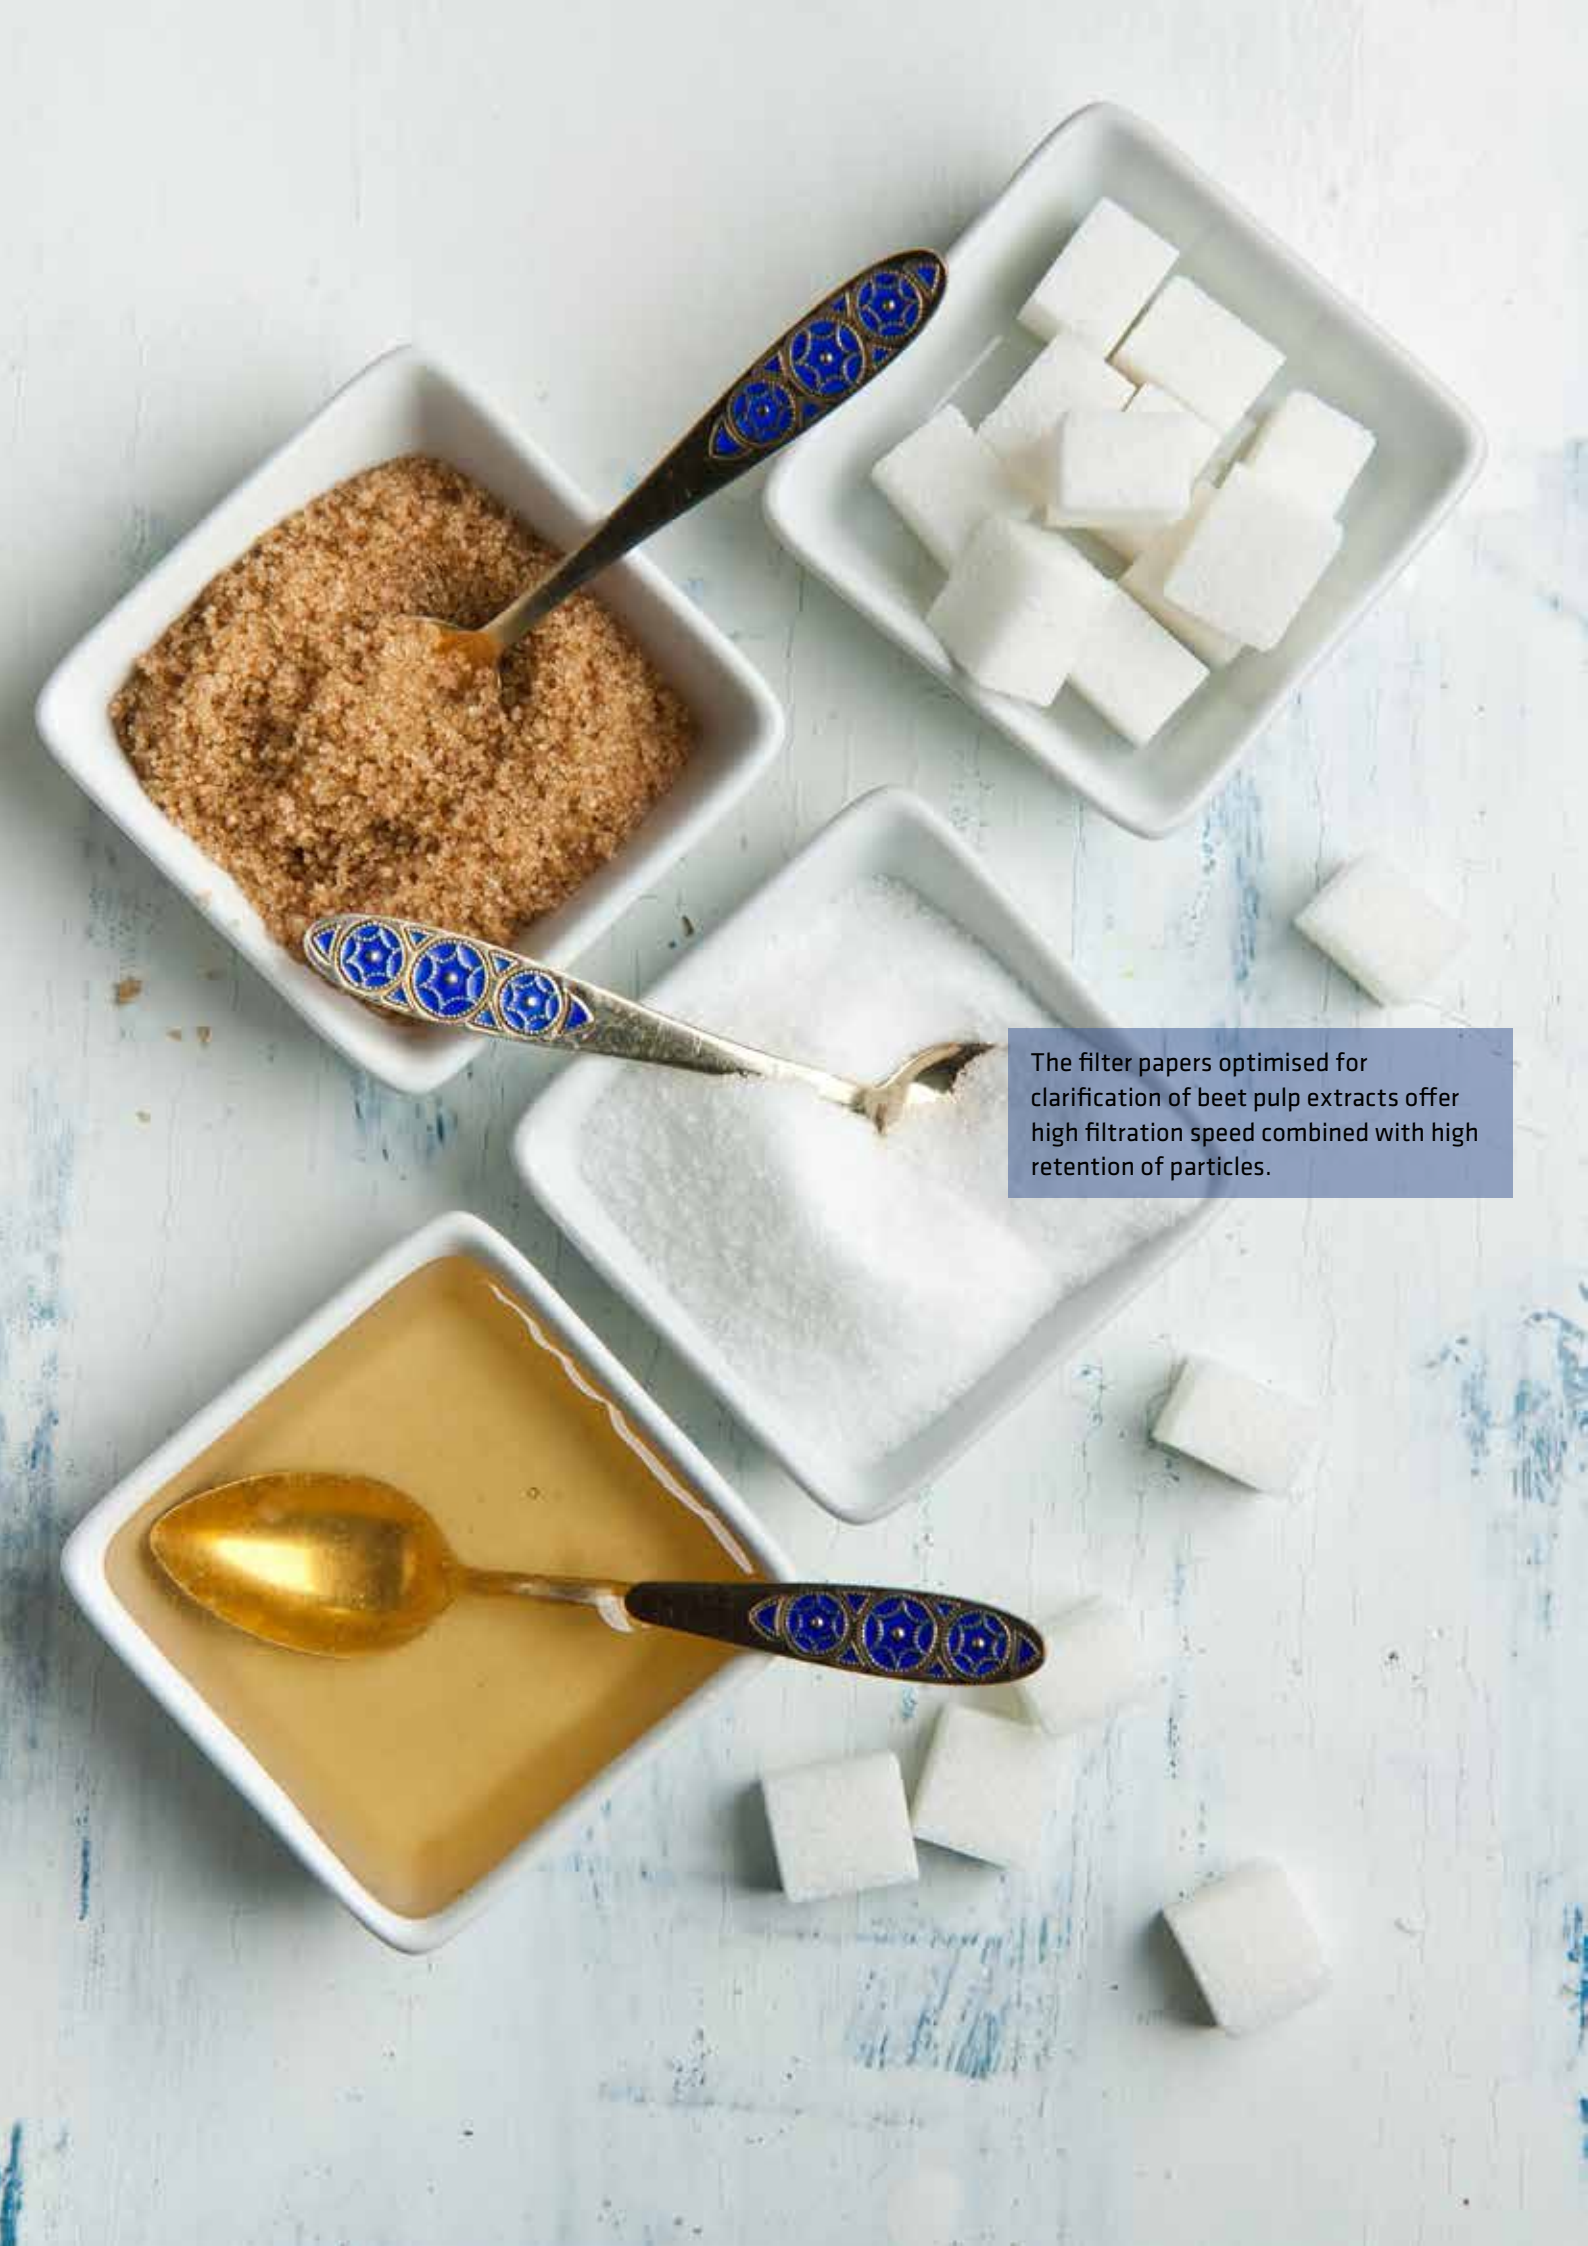

The filter papers optimised for clarification of beet pulp extracts offer high filtration speed combined with high retention of particles.



Food

Sugar

Target application:

- Analysis of ingredients, contaminants and microbiological purity according to the § 64 LFGB German law for food, feed and utensils.
- Clarification of dried beet pulp extracts
- Filtration of beet juice after addition of lead acetate for polarimetric sugar determination
- 3459 is recommended for Venema units according to the lead acetate method

Process	Technique	Type of Filter	Filter grade
Polarimetric determination of sugar	Clarification of dried beet pulp extracts	Fast filtration paper	3002
Venema, sodium, lead acetate	Clarification before polarimetric determination of sugar	Fast, creped filter paper	3459
Gravimetry	Filtration (funnel/Büchner)	Filter paper, quantitative analysis	589/1 589/2
HPLC	Clarification of organic samples	0.2 µm nylon syringe filters	SNY 020
		0.2 µm nylon membranes	NY 020
	Filtration of mobile phase	0.45 µm nylon membranes	NY 045
Microbiological analysis	Detection of microorganisms	White, sterile cellulose nitrate membranes with grid, 0.2 and 0.45 µm	NCS 020 NCS 045
Improvement in filtration Clarification of samples	Pre-filters for membranes	Glass microfibre filters	GF 9
Analysis of sucrose	Clarification of samples of sugar syrup	0.45 µm cellulose acetate syringe filters	SAC 045
		0.45 µm cellulose acetate membranes	AC 045
Protection of apparatus and surfaces	Absorption	Absorbent paper with polyethylene layer	295 PE

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.



We keep the promise of a documented production process with 100% batch traceability down to the raw material used.



Food

Milk and milk products

Target application:

- Analysis of ingredients, contaminants and inspection of microbiological purity according to the § 64 LFBG German law for food, feed and utensils
- Gravimetric analysis and detection of metal particles
- Determination of whiteness

Process	Technique	Type of Filter	Filter grade
Analysis in line with §64 LMBG	Filtration (funnel/Büchner)	Filter paper for qualitative analysis	604, 595, 597
Gravimetric analysis according to § 64 LMBG		Filter paper for quantitative analysis	589/1, 589/2, 589/3
Detection of metals in fats		Filter paper for clarification	0858
Measurement of solids in suspensions	Filtration, weighing	Glass microfibre filters	GF 52
HPLC	Clarification of organic samples	0.45 µm nylon syringe filters	SNY 045
Microbiological analysis	Microorganism count	White, sterile cellulose nitrate membranes with grid, 0.2 and 0.45 µm	NCS 045, NCS 020
Degree of whiteness of milk	Sample collection	Filters made from cellulose/synthetic fibres	0048
Protection of apparatus and surfaces	Absorption	Absorbent paper with polyethylene layer	295 PE

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.



Hahнемühle FineArt GmbH offer outstanding products suitable for common processes in the analysis of food and the detection of contaminants. We are very aware of the purity and reliability which customers expect from tools for their specific filtration application.



Food

Meat and meat products

Target application:

- Analysis of ingredients, contaminants and microbiological purity according to § 64 LFBG German law for food, feed and utensils
- Gravimetric analyses
- Measurement of fats

Process	Technique	Type of Filter	Filter grade
Measurement of fats	Extraction with: Soxhlet/Tecator	Cellulose extraction thimbles	900, 901
Gravimetry	Filtration (funnel/Büchner)	Filter paper for quantitative analysis	589 /1, 589 /2 589 /3, 589 /5
Surface protection	Absorption	Absorbent paper with polyethylene layer	295 PE
Measurement of nitrogen	Kjeldahl weighing	Weighing paper	360

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.



The average ash content of our quantitative papers is 0.004%, or 0.002% ash for the hardened grades. The purest paper in the filter market!



Agriculture

Soil and fertiliser

The determination of trace elements and nutrients in soil is important to optimise agricultural crops

Target application:

- Analysis of nutrients, mineral nutrients, contaminants and microbiological purity
- Measurement of nitrogen, potassium and phosphate
- Ideal for detecting minerals and heavy metals

Process	Technique	Type of Filter	Filter grade
Particle separation	Filtration (funnel, Büchner)	Filter paper for clarification	0858
Measurement of nitrogen insoluble in water		Filter paper for qualitative analyses, low ash content	2095
Measurement of nitrogen		Filter paper for quantitative analyses, ash-free	589/5
Measurement of trace elements		Filter paper for quantitative analyses, ash-free	589/1, 589/2 589/3, 589/4 589/5, 589/6
Free amino acids and total amino acids		Filter paper for quantitative analyses, ash-free	589/2 589/5
Measurement of soluble sulphates	Water extraction	Filter paper for quantitative analyses, ash-free	589/3
Determination of K and P	Egnér, Riehm and Lederle	Filter paper, low phosphates	589/1, 589/2 589/3, 589/4 589/5, 589/6
Measurement of solids in suspension	Filtration difference in weight	Glass microfibre filters	GF 52
Measurement of nitrates and phosphates by HPLC	Sample preparation	Nylon, 0.45 µm, syringe filters	SNY 045
Measurement of nitrogen	Weighing	Weighing paper, low in nitrogen	360

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.

The high consistency of filtration quality ensures reliable results of the analysis from one lot to the other.





Agriculture

Animal feed

Target application:

- Analysis of nutrients, mineral nutrients, contaminants and microbiological purity
- Ideal for the detection of trace elements like Mg, Mn, Zn, Co, Cu, Mo, and B
- Measurement of fats

Process	Technique	Type of Filter	Filter grade
Measurement of fats	Extraction with Soxhlet or Tecator	Cellulose extraction thimbles	900, 901
Particle separation	Filtration (funnel/Büchner)	Filter paper for clarification	0858
Gravimetry		Filter paper for quantitative analysis	589/1, 589/2 589/3, 589/4 589/5, 589/6
Measurement of Calcium		Filter paper for quantitative analysis	589/2
HPLC	Clarification of organic samples	Syringe filters with nylon membranes or regenerated cellulose, 0.45 µm	SNY 045 SCR 045
	Filtration of mobile phase	Nylon membrane, 0.45 µm	NY 045
Microbiological analysis	Detection of microorganisms	White cellulose nitrate membranes, 0.45 µm, gridded	NCS 045
Separation of solids from suspensions	Filtration, weight determination	Glass microfibre filters	GF 52
Surface protection	Absorption	Absorbent paper with polyethylene layer	295 PE

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.



Hahnemühle is the preferred and trusted Seed Testing Paper manufacturer for many Seed Testing Companies around the world. The stringent ISTA (International Seed Testing Association) provisions are adhered to as early as the production stage.



Agriculture

Germination testing

- All papers are made of pure cellulose and are free from mould, bacteria and any toxic substances which might interfere with the growth of seeds
- The highly absorbent papers store sufficient moisture for the whole duration of the test
- Their low density means the papers have a high degree of absorbency, but the roots are not able to grow into the paper
- The conductivity of the papers is lower than 40 mS/m, and the pH is between 6.0 and 7.5
- We offer a broad range of papers for the various germination methods TP, BP and PP

Target application:

The high purity of Hahnemühle germination test papers means they are very well suited for testing the germination of medium large and coated seeds (sugar beet, fodder beet, grain, sunflower, rapeseed, mustard), seeds with small, white rootlets, grain, very sensitive seeds, small seeds (flowers, grasses).

Process	Technique	Type of Filter	Filter grade	
Measurement of fats	Extraction with: Soxhlet/Tecator	Cellulose extraction thimbles	900, 901	
Seed germination	PP method (pleated paper)	Germination test paper, pleated strips, white Wrapping strips, grey	3014	
			3236	
	TP method (top of paper)	Germination test paper as wrapping strips, for Jacobsen tank, for petri dishes	Thin, 81g	597
			140g	598
			Creped, 135g	520bII
			Filter card	3621 light blue
			Filter card	3633 light blue
BP method (between paper)	Germination test paper	Filter card	3644 blue	
		165g	3645 yellow	
Dust control	Particle collection by dust meter	Glass microfibre filters with binder	150g	3024
			520b	5703
Prevention of penetration by roots, protection of surfaces	Absorption	Absorbent paper with polyethylene layer on one side	GF 9	
			295 PE	

You can find parts numbers for pleated strips and cuts on page 134. Other formats such as rolls, sheets and cuts are available on request.



Glass microfibre and quartz microfibre filters are recommended for the analysis of atmospheric pollution and for particle determination at high temperatures.



Environmental analysis

Air pollution

Target application:

- Ambient air monitoring
- Determination of suspended particles (SPM: suspended particular matter) and total suspended particles (TSP: total suspended particular matter)
- Detection of PM10 and lead (Pb)
- Monitoring the presence of pollutants in the air at different measuring points

Process	Apparatus	Technique	Type of Filter	Filter grade
Sampling of total suspended particulate matter TSP ($\varnothing > 30\mu\text{m}$) ¹⁾	High volume capturer	Gravimetry	Glass microfibre filters, in line with US EPA	GF 50
	Low volume capturer			GF 50
	Cascade impactor			GF 50
Sampling and analysis of PM10 ($\varnothing > 10\mu\text{m}$) ¹⁾²⁾³⁾	High volume capturer		Quartz microfibre filters, in line with US EPA and DIN EN ISO 23210	QFH
	Low volume capturer			QFH
	Cascade impactor			QFH
Sampling and analysis of PM2.5 ($\varnothing > 2.5\mu\text{m}$) ¹⁾	High volume capturer		Quartz microfibre filters, in line with US EPA and DIN EN ISO 23210	QFH
	Low volume capturer			QFH
	Cascade impactor			QFH
Sampling and analysis of lead ⁴⁾	High volume capturer	Atomic absorption spectroscopy	Quartz microfibre filters, in line with US EPA and DIN EN ISO 23210	QFH
	Low volume capturer			QFH
	Cascade impactor			QFH

You can find parts numbers for round filters and sheets on page 134. Other formats such as rolls and special cuts are available on request.

1) Reference methods in '40CFR50 Appx B, J, L, and G' in the 'Federal Register of the US EPA'

2) Air quality in accordance with EN12341

3) Directive 2008/50/EC, in European standard EN12341.

4) Ambient air quality in accordance with EN 14902:2005



Glass and quartz fibre filters are resistant to high temperatures and aggressive chemicals, with the exception of hydrofluoric acid. Due to their purity, chemical stability and high filtration performance, these materials are highly suitable for air and emissions monitoring.



Environmental analysis

Emission control

Target application:

- Monitoring of anthropogenic atmospheric emissions (oil refineries, power stations, burning of liquid and solid fuels, cement factories, mining industries, incinerators, iron foundries, grinders, asphalt plants, glassmakers, ceramic factories) and at stationary sources
- Measurement of dust release in workplace and production processes, exhaust fumes from private houses, and newly developed engines (for cars and other vehicles)

Process	Apparatus	Technique	Type of Filter	Filter grade
Measurement of nitrogen (gravimetry) ^{1) 2) 3) 4)}	Isokinetic probe with rear filter-holder (up to 500°C)	Filtration, weighing	Glass microfibre filters Glass fibre thimbles	GF 50 CFV
	Isokinetic probe with front filter-holder (up to 900°C)		Quartz microfibre filters Glass fibre thimbles	QFH CFV
Measurement of inorganic lead ⁵⁾	Isokinetic probe with rear filter-holder (up to 500°C)	Atom absorption spectroscopy	Glass microfibre filters Glass fibre thimbles	GF 50 CFV
Measurement of metals ⁶⁾	Isokinetic probe with rear filter-holder (up to 500°C)		Glass microfibre filters Glass fibre thimbles	GF 50 CFV
	Isokinetic probe with front filter-holder (up to 900°C)		Quartz microfibre filters Glass fibre thimbles	QFH CFV
Deposition of radioactive aerosols	Filtering instrument	Filtration, Scintillation	Glass microfibre filters, retention capability < 1µm	GF6
Monitoring the combustion air	Filtering instrument	Filtration, weighing	Glass microfibre filters	GF8, GF9
Monitoring particles in air and gases	Automatic air filter units, air analysers with filter rolls	Filtration, weighing	Glass microfibre filters with high mechanical strength	GF10
Smoke test/house coal	Portable measurement instrument	Filtration + optical evaluation	Fast, white filter paper, high air permeability	604L
Emission test/engine development ⁷⁾	Automatic air filter units, air analysers with filter rolls	Filtration + optical evaluation	Medium-fast filter paper, small particle retention, white	597L

You can find parts numbers for round filters and sheets on page 134. Other formats such as rolls and cuts are available on request.

1) EPA 5

2) EPA 17

3) UNE ISO 9096

4) EN 13284

5) EPA 12

6) EPA 29

7) Stationary emissions sources. Optical on-site analysis



Glass fibre grade GF 6 is ideal for gravimetric analyses of organic and inorganic impurities in water and wastewater according to DIN 38409 and EN 872 (suspended particles). The inorganic binder increases solidity and does not distort the gravimetric output in annealing with 500 °C as stipulated.



Environmental analysis

Water

Target application:

- Gravimetric analyses of organic and inorganic contaminants in water and waste water
- Monitoring microbiological quality of drinking water
- Determination of total dry residue
- Determination of dissolved organic carbon (DOC) and total organic carbon (TOC)

Process	Technique	Type of Filter	Filter grade
Sample preparation	Clarification	Qualitative filter paper	595
Total dry residue, ash residue ^{2) 3)}	Filtration, weighing	Glass microfibre	GF 6
		Quantitative filter paper	589/1
Measurement of solids in suspensions after drying at 105°C ^{1) 2) 17)}	Filtration, weighing	Glass microfibre	GF 52
			GF 6
Measurement of the total remainder after drying at 180°C ^{5) 6)}			GF 52
			GF 6
Solids and volatiles after incineration at 550°C ⁷⁾			GF 50
Suspended particles ⁸⁾			GF 52, GF 6
Colouration ²⁾	Filtration		GF 6, GF 50
Radioactivity			
Measurement of metals			
Measurement of total and dissolved organic carbon ^{9) 10) 11)}	Filtration, combustion-infrared	0.45 µm cellulose acetate/mixed cellulose ester	AC 045 MCE 045
	Filtration, oxidation	Glass microfibre	GF 6, GF 52
Measurement of dissolved iron ²⁾	Filtration	0.45 µm cellulose acetate	AC 045
Measurement of metals (pre-filtration) ¹²⁾	Filtration, ASS	0.45 µm cellulose acetate	AC 045
Measurement of oils and fats ¹³⁾	Buchner funnel	Quantitative filter paper	589/4
Measurement of metals			589/1, 589/3
Measurement of radioactivity ¹⁵⁾	Precipitation (Ra)	0.45 µm cellulose acetate	AC 045
Measurement of non-metallic inorganic compounds ¹⁶⁾	Filtration	Quantitative filter paper	589/1, 589/3 589/5
Measurement of oils and fats ¹³⁾	Extraction with Soxhlet or Tecator	Cellulose extraction thimbles	900 901
Microbiological analyses of drinking water	Filtration	Sterile cellulose mixed ester membranes 0.2 / 0.45 µm, white, gridded	MCE 020, MCE 045
		Sterile cellulose nitrate membranes, 0.2 µm or 0.45 µm, gridded	NCS 020, NCS 020 NCS 045, NCS 045
Microbiological analyses of drinking water, legionella		Sterile cellulose nitrate 0.2/0.45 µm, black, gridded	NCS 045

1) DIN EN 872

2) DIN 38409-1

3) DIN 38409-2 D

4) UNE 77031:

5) 2540 C Standard Methods

6) 2540 E Standard Methods

7) 2530 B Standard Methods

8) UNE EN 1484

9) 5310 B Standard Methods

10) 5310 D Standard Methods

11) 3030 B Standard Methods

12) UNE 77037

13) DIN 38409 D

14) 7500-Ra B Standard Methods

15) Part 4000 Standard Methods

16) DIN 38409 H2-2

17) 2540 C Standard Methods

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.

Folded filters or creped filter papers are particularly suitable for quickly clarifying samples owing to the larger surface in comparison with round filters.





Environmental analysis

Waste products

Target application:

- Analysis of waste products in the disposal of industrial waste and laboratory waste
- Particle separation and clarification before further measurements
- Sample preparation and washing out of samples for characterisation of toxic substances

Process	Technique	Type of Filter	Filter grade
Characterisation of dangerous substances	Filtration	0.2 µm cellulose acetate/cellulose nitrate	AC 020 NC 020
	Filtration (funnel/Büchner)	Filter papers for clarification	0905
Characterisation of toxic substances ¹⁾	Pressure filtration	Glass microfibre filters	GF 52
Analysis of contaminated soil ²⁾	Extraction by water	0.45 µm cellulose nitrate/ cellulose acetate	NC 045 AC 045
Filtration of biosolids/sludge from wastewater	Continuous filtration by filterbelt	Fast, very high wet strength	1573
Protection of apparatus and surfaces	Absorption	Absorbent paper with polyethylene layer	295 PE

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.

1) EPA 1311 TCLP

2) DIN 38414-4



The high consistency of the quality level ensures reliable analysis findings from one lot to the other over many years without the need to adjust analysis procedures.



Chemicals

Quality control

Target application:

- Clarification before quantitative analysis
- Sample preparation before HPLC
- Microbiological investigations
- Extraction before an analysis

Process	Technique	Type of Filter	Filter grade	
Separation of solids from suspensions	Filtration (funnel, Büchner)	Filter paper for clarifying fluids	Smooth	0860
			Grained	0858
			Creped	0905
Gravimetry	Filtration (funnel, Büchner)	Filter paper for quantitative analyses	589/1	589/2
			589/3	589/4
			589/5	589/6
Analysis of chemicals	Paper chromatography	Chromatography papers	Hardened filter paper for quantitative analyses	
			1505, 1506, 1507	
Clarification of samples	Pre-filters for membranes	Glass microfibre filters	3469	
			2043 a	
Analysis of extractables	Extraction	Cellulose extraction cartridges	GF 9	
Microbiological analysis	Detection of microorganisms	Cellulose nitrate membranes with grid, 0.45 and 0.2 µm, sterile	900, 901	
		Mixed cellulose ester membranes with grid, 0.45 µm and 0.2 µm, sterile	NCS 045	
	Clarification of biological fluids	Sterile syringe filters with cellulose acetate 0.45 µm and 0.2 µm	NCS 020	
			MCES 045	
HPLC	Preparation of organic samples	Nylon syringe filters, 0.2 µm	MCES 020	
	Filtration of mobile phase	Nylon membrane, 0.2 µm	SACS 045	
Surface protection	Absorption	Absorbent paper with polyethylene layer	SACS 020	
			295 PE	

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.



The average ash content of our quantitative papers is 0.004%, or 0.002% ash for the hardened quantitative papers.
The purest paper in the filter market!



Chemicals

Cleaning materials

Target application:

- Clarification before quantitative analysis
- Gravimetric measurements
- Sample preparations before HPLC

Process	Technique	Type of Filter	Filter grade		
Gravimetry	Filtration (funnel, Büchner)	Filter paper for quantitative analysis	589/1 589/2		
			589/3 589/4		
			589/5 589/6		
Particle separation	Filtration (funnel, Büchner)	Folded filters for clarification	Smooth 0860		
			Grained 0858		
			Creped 0905		
Determination of tenside content	Filtration (Funnel/Büchner)	Glass microfibre filters	GF 50		
HPLC	Clarification of samples	Syringe filters with nylon, 0.45 µm	SNY 020		
Separation of solids in suspensions	Clarification of samples	Syringe filter, with nylon, 0.2 µm	SNY 020		
			Filtration of mobile phase	Nylon membranes	NY 020
			Filtration (Funnel/Büchner)	Glass microfibre filters	GF 52
Surface protection	Absorption	Absorbent paper with polyethylene layer	295 PE		

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.



Owing to the larger surface in comparison with round filters, folded filters or creped filter papers are particularly suitable for quickly clarifying samples – particularly in cases of viscous fluids such as oils.



Chemicals

Oil refinery

Target application:

- Clarification before quantitative analysis
- Gravimetric measurements
- Analysis of soot particles

Process filtration:

Removal of particles from used oil

Process	Technique	Type of Filter	Filter grade
Gravimetry	Filtration (funnel/Büchner)	Filter paper for quantitative analysis	589/1 589/2
			589/3 589/4
			589/5 589/6
Hardened filter papers for quantitative analysis			1505, 1506, 1507
Solid-liquid separation		Folded filters for clarification	Smooth 0860
			Grained 0858
			Creped 0905
		Filter paper qualitative analysis, low ash	591
Extraction of organic compounds	Extraction with Soxhlet	Cellulose extraction thimbles	900
Determination of solids in suspensions	Filtration, weighing	Glass microfibre filters	GF 52
Surface protection	Absorption of liquids	Absorbent paper with Polyethylene coating	295 PE
Determination of particles with diameter $\geq 0.8 \mu\text{m}$	Filtration, weighing	White, smooth cellulose nitrate membranes $0.8 \mu\text{m}$	NC 080
Determination of particles with diameter $\geq 0.45 \mu\text{m}$		White, smooth cellulose nitrate membranes $0.45 \mu\text{m}$	NC 045
Monitoring of soot in oil (OCM)	Dispersancy of the oil on absorptive paper	Absorptive, dense filter paper	602h

Production	Type of Filter	Filter grade
Clarification and purification	Fast, creped, for large particles	3144L, 2410
	Fast, for coarse particles	1450nf
	Medium-fast, for small particles	22, 2589c, 3605
	Slow, for small particles	2589d
Removal of particles from used oils	Very fast, wet strength	3144L
		1450nf

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.



The quality of mortar and cement is regulated by German and European norms. Hahnemühle offers filter papers which enable manufacturers to comply with these norms and which are well established in this application area.



Chemicals

Cement analysis

Target application:

- Ensuring product quality
- Determination of water retention capacity
- Determination of grind level

Process (Technique)	Filter Type		Size Ø [mm]	Grade	Weight [g/m ²]	Thickness [mm]
Water retention capacity (DIN EN 413-2)	Filter paper		100	3469	192	0.36
				2589A	200	0.45
Building lime (DIN EN 459-2)	Filter card		190 x 190 sheets	2727	700	1.3
Mortar with binders containing minerals (DIN 18555-7)	Filter card		190 x 190 sheets	2727	700	1.3
Blaine test (grinding fineness of cement (DIN EN 196-6))	Filter paper	fast	12.5	589/1	79	0.19
			12.7			
			40.5			
		medium-fast	12.7	589/2	86	0.18
			40.5			
			fast			

You can find parts numbers for round and folded filters on page 134. Other formats such as rolls, sheets and cuts are available on request.



The high consistency of the paper quality level ensures reliable results of the final test device from one lot to the other over many years.



Pharmaceuticals – Diagnostics

Production and quality control of pharmaceuticals


Target application:

- Monitoring purity, contamination and inspecting microbiological purity
- Clarification before analysis
- Gravimetric measurements
- Sample preparations before HPLC

Process	Technique	Type of Filter	Filter grade
Separation of solids from suspensions	Filtration (funnel, Büchner)	Filter papers for clarifying fluids	0860, 0858
Gravimetry	Filtration (funnel, Büchner)	Filter paper for quantitative analyses	589/1 589/2 589/3 589/4 589/5 589/6
Clarification of samples	Pre-filters for membranes	Glass microfibre filters	GF 9
Microbiological analysis	Detection of microorganisms	Cellulose nitrate membranes with grid, 0.45 µm and 0.2 µm, sterile	NCS 045 NCS 020
	Clarification of biological fluids	Cellulose acetate membrane filters, 0.2 µm and 0.45 µm Sterile syringe filters with cellulose acetate 0.45 µm and 0.2 µm	AC 020, AC 045 SACS 045, SACS 020
Identification of pathogens/ resistance against antibiotics or chemotherapeutics	Measurement of the inhibition zone on inoculated nutrient agar	Cotton linters paper of highest purity	0.35 mm 22 0.90 mm 2668 0.73 mm 3324
HPLC	Preparation of organic samples	Syringe filters with nylon	SNY 020 SCR 020
	Filtration of mobile phase	Nylon membrane, 0.2 µm	NY 020

Production	Type of Filter	Filter grade
Protective papers in filter presses	Medium-fast, wet strength, creped	2048, 2411
	Very slow, high wet strength (hardened)	1577
Papers and cards	Very fast, wet strength	1450nf
	Medium-fast, wet strength	3605, 572, 3205
	Slow, wet strength	2589d, 2589e
Creped papers	Very fast, wet strength, thick	520bII, 520b, 3144L
	Very fast, wet strength	520a

You can find parts numbers for round and folded filters and membrane filters on page 134. Other formats such as rolls, sheets and cuts are available on request.

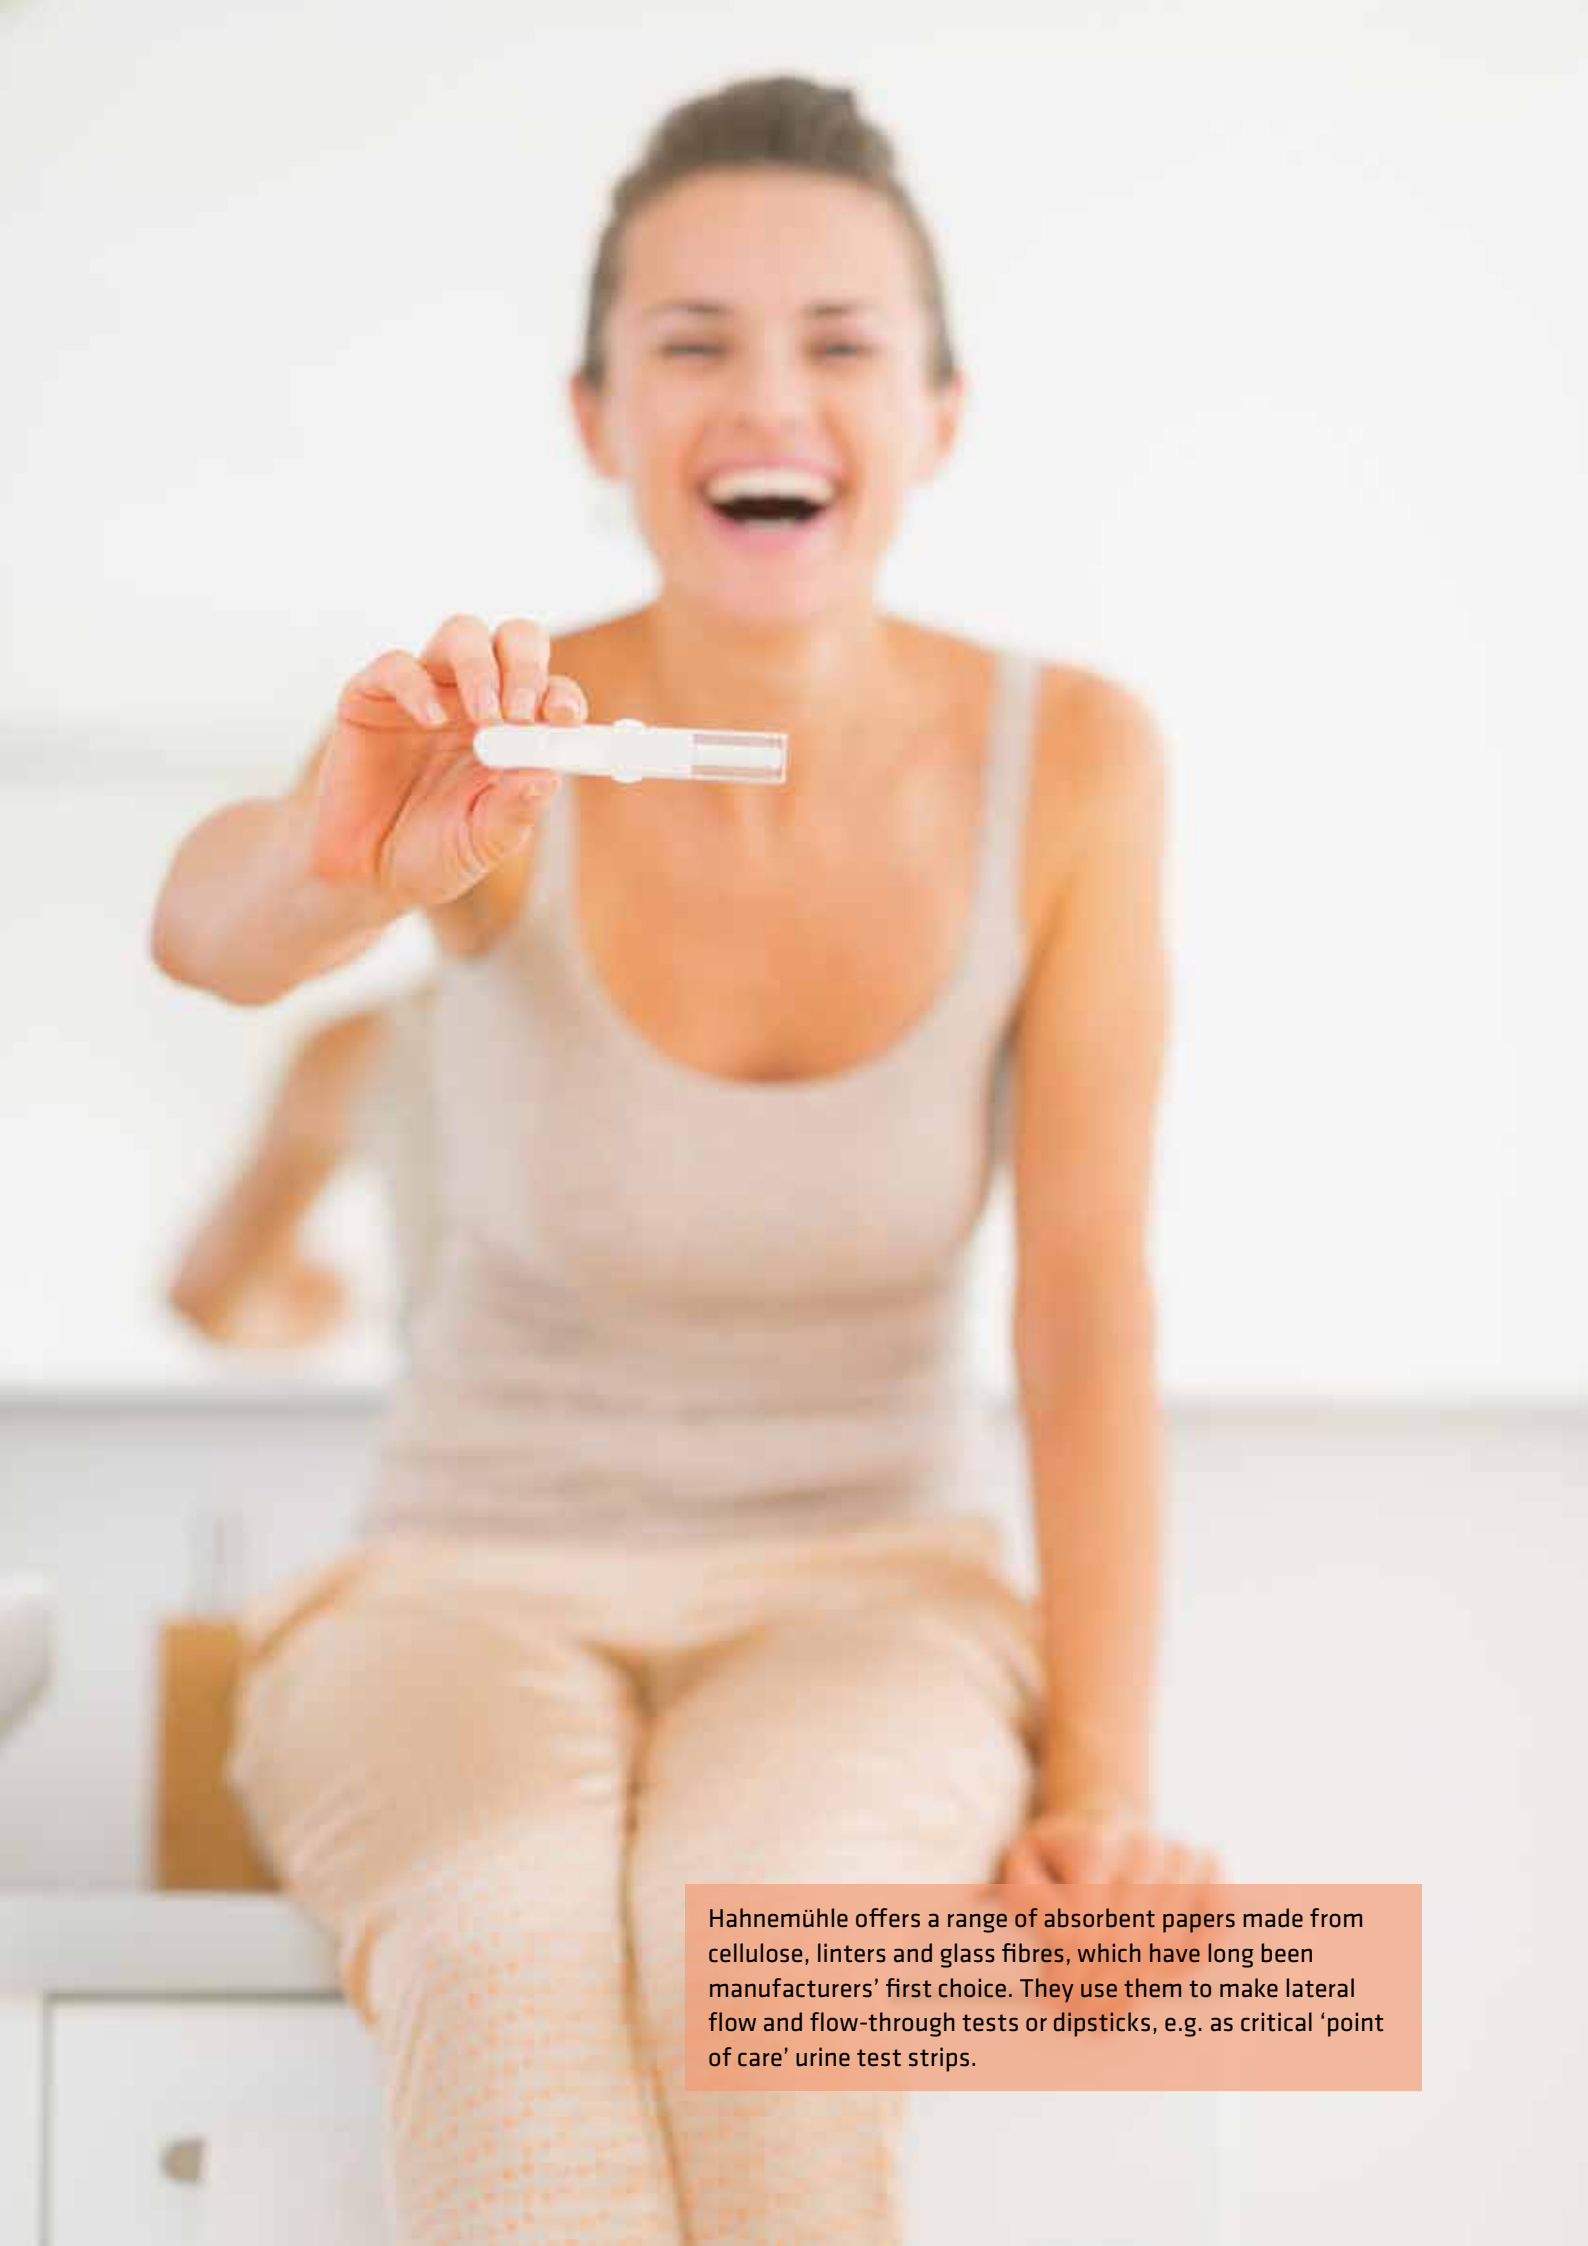

Hahnemühle offers a range of absorbent papers made from cellulose, linters and glass fibres, which have long been manufacturers' first choice. They use them to make lateral flow and flow-through tests or dipsticks, e.g. as critical 'point of care' urine test strips.



Pharmaceuticals – Diagnostics

Papers for diagnostic test strips

Purpose of producing diagnostic test strips:

- Use of papers and glass fibre media which are high-performing and consistent
- Avoid interactions between the reagents spread in the finished test strips with the raw material of the paper
- High wet strength for safe handling during roll-to-roll impregnation
- High consistency in paper quality, particularly in thickness and capillary force, over the entire paper roll produced for reliable analysis results from lot to lot

Process	Water Absorbency g/100 cm ²	Capillary Rise (Klemm)	Grade	Thickness
Impregnation	1.20	-	597 L	0.17 mm
	1.20	75 mm/10 min	597 nf	0.18 mm
	1.25	105 mm/30 min	2043a	0.17 mm
	2.40	115 mm/30 min	2316	0.30 mm
	3.3	140 mm/30 min	235L	0.45 mm
	3.35	125 mm/10 min	2992	0.47 mm
	5.80	150 mm/10 min	3324	0.69 mm
	7.40	155 mm/10 min	BP003	0.90 mm
Wicking/Blotting	-	170 mm/30 min	2727	1.3 mm
	2.70	65 mm/10 min	BP002	0.35 mm
	7.40	155 mm/10 min	BP003	0.90 mm
	14.0	-	BP005	1.5 mm
Sample collection	1.20	-	597 L	0.17 mm
	3.35	125 mm/10 min	2992	0.47 mm
	2.70	65 mm/10 min	3469	0.35 mm
Sample application	-	130 mm/10 min	GF 51	1.0 mm
	-	90 mm/10 min	GF 55	0.40 mm
	5.80	150 mm/10 min	3324	0.69 mm
	7.40	155 mm/10 min	2668	0.90 mm
	-	170 mm/30 min	2727	1.45 mm
Conjugate release	-	130 mm/10 min	GF 51	1.0 mm
	14.0	-	BP005	1.5 mm
	-	90 mm/10 min	GF 55	0.40 mm

Ordering information

All grades are available as rolls, sheets and custom cuts. Please contact us for further details and advice.



Applications:

- Production of indicator strips used for chemical detection in liquids and gases
- Use as raw paper for indicators of humidity and radioactive irradiation
- Use as proof of sterilising performance of autoclaves (Bowie Dick test)



Pharmaceuticals – Diagnostics

Papers for impregnation (raw papers)

Purpose of using absorbent papers for impregnation:

- Use of ultrapure paper grades – linters and cellulose – without chemical additives to avoid interference in the detection reaction
- Homogeneous dispersion of the impregnation solution
- High consistency in thickness and capillary force lot to lot
- High wet strength for safe handling during reel-to-reel impregnation

Weight [g/m ²]	Wet strength water column [mm]	Capillary rise [mm/10min]	Grade	Thickness
250	1300	140 (30 min)	23SL	0.44 mm
82	1300	75	597nf	0.17 mm
165	300	115 (30 min)	2316	0.34 mm
192	350	65	3469	0.35 mm

Ordering information

Available as rolls, sheets and customised cuts. Please contact us for further details and advice.



The pure raw materials - linters and cellulose - are used in the production of these filter papers, which allow their use with pharmaceuticals and food during the production stage. For selected grades with different retention rates, the conformity to both the U.S. FDA recommendation 21 CFR and by the German BfR (Federal Institute for Risk Evaluation) recommendation XXXVI and XXXVI/1 can be approved.



Pharmaceuticals – Diagnostics

Diagnostics

Purposes of manufacturing diagnostics:

- Highest level of raw paper purity to produce highly sensitive allergy tests
- Highest yield in isolation of DNA/RNA
- High wet strength for use in blotting after gel electrophoresis

Process	Technique	Type of Filter	Filter grade
Separation and isolation of DNA, RNA	Filtration (even by centrifuge)	Glass microfibre without binder	GF 50, GF 51, GF 52
Tests for diseases and allergies etc.	Sample device for detection reactions with enzymes, antibodies (impregnation)	Pure, absorptive filter papers, almost no contaminants	589/1, 589/2 589/3, 589/4 589/5, 589/6
Tests for viral and bacterial diseases/infections	Blotting after gel electrophoresis	Pure, absorptive and wet strength blotting papers	BP002, BP003 BP005 2727, 2589A
Microbiological analysis	Detection of microorganisms	Cellulose nitrate membranes with grid, 0.45 µm and 0.2 µm, sterile	NCS 045 NCS 020
	Clarification and sterilisation of biological fluids/culture media	Cellulose acetate membrane filters, 0.45 µm and 0.2 µm Sterile syringe filters with cellulose acetate 0.2 µm and 0.45 µm	AC 020, AC 045 SACS 020 SACS 045
HPLC	Preparation of biological samples	Syringe filters with nylon	SNY 020
	Filtration of mobile phase	Nylon membrane, 0.2 µm	NY 020

Production	Type of Filter	Filter grade
Filter presses, filtration of reagents	Creped	medium-fast 2410
	Filter card	medium-fast 3605
		fast - slow 2589A - 2589E
	Hardened	fast, medium-fast 1573, 1574
slow, very slow 1575, 1577		
Protective papers in filter presses	Medium-fast, wet strength, creped	2048, 2410
	Very slow, high wet strength (hardened)	1577
Filter papers and cards	Very fast, wet strength	1450nf
	Medium-fast, wet strength	3605, 572, 3205
	Slow, wet strength	2589d, 2989e
Creped papers	Very fast, wet strength, thick	520bII, 520b, 3144L
	Very fast, wet strength	520a

Ordering information

Available as rolls, sheets and customised cuts. Please contact us for further details and advice.

Products by properties



Ashless filter papers

Recommended for quantitative analyses, routine gravimetric tests and sample preparation for instrumental analyses

Page 57



Hardened ashless filter papers

For vacuum and pressure filtration and the use of acidic and alkaline solutions under pressure for quantitative analyses

Page 59



Highly pure filter papers

Precise identification of materials and sample preparation for sensitive, qualitative detection methods

Page 61



Hardened highly pure filter papers

For vacuum and pressure filtration and the use of acidic and alkaline solutions under pressure for qualitative analyses

Page 65



Glass fibre filters

Controlling air and water pollution

Page 67



Quartz fibre filters

Atmospheric pollution control and for particles determination at high temperatures

Page 71



Universal filter papers for clarification

For clarifying liquids and preparing samples

Page 73



Technical filter papers for industrial applications

Cellulose and linter papers with different surfaces and grammages

Page 75



Low nitrogen filter paper

For filtering fine precipitates to determine their nitrogen content

Page 79



Kieselguhr filter paper

For separating very fine, semi-colloidal turbidity

Page 79



Activated carbon filter paper

For separating very fine, semi-colloidal turbidity

Page 81



Black filter paper

For the detection of very fine traces of light particles and precipitates

Page 81



Filter papers for malt and beer analysis

For analytical methods in breweries and sample preparation

Page 83



Filter papers for the sugar industry

Clarifying filtration of beet extracts and juices prior to analysis

Page 83



Cellulose extraction thimbles

For controlling food products and consumer goods and environmental monitoring

Page 85



Glass fibre thimbles

Analyses of particles and aerosols in hot air

Page 87



Blotting papers

For various blotting methods after electrophoresis

Page 89



Antibiotic test paper

For determining the effectiveness of antibiotics on infectious pathogens

Page 91



Absorbent paper with polyethylene layer

Effective, water-proof surface protection for work surfaces


Page 93



Chromatography papers

Recommended for chromatographic analyses and preparations

Page 95



Germination test paper

Recommended for the reliable evaluation of seeds in accordance with ISTA guidelines

Page 97



Weighing paper

Smooth and polished surfaces on both sides

Page 99



Lens cleaning paper

For cleaning sensitive, optical surfaces

Page 99



Cellulose acetate membrane filters

Recommended for aqueous samples, biological applications and protein filtration

Page 101



Cellulose nitrate membrane filters

For the clarification and sterilisation of aqueous solutions, microbiological analyses and particle counts

Page 103



Mixed cellulose ester membrane filters

Ideal for clarification and sterilisation

Page 105



Nylon membrane filters

Chemically stable membrane for preparing samples

Page 107



PTFE membranes filters

Highly chemically resistant membrane with a high degree of mechanic stability

Page 109



Cellulose acetate syringe filter

High flow rates, also available as sterile peel-packs

Page 111



Regenerated cellulose syringe filters

Low protein adsorption

Page 113



Nylon syringe filters

High resistance for HPLC and GC applications

Page 115



PTFE syringe filter

Highly chemically resistant, hydrophobic

Page 117



The α cellulose content is above 98%, therefore filter paper has a high stability and durability.



Ashless filter papers for quantitative analysis

Ashless filters (approx. 0.004 %), recommended for quantitative analyses, routine gravimetric tests and sample preparation for instrumental analyses

- Acid-washed and rinsed with water to neutralise
- Free of minerals and metallic ions, ideal for the detection of metallic ions
- Perfectly qualified for food control, beverage analysis and environmental monitoring

Technical data

Type	Properties	Filtration Herzberg [s]	Retention of particles * [µm]	Weight [g/m ²]	Thickness [mm]
● 589/1 – black	fast	50	12 – 25	79	0.19
○ 589/2 – white	medium-fast	140	4 – 12	85	0.18
● 589/4 – yellow	medium-fast, low-fat	170	4 – 7	81	0.17
● 589/5 – red	medium-fast	450	2 – 4	84	0.17
● 589/6 – green	slow, thin	900	2	74	0.15
● 589/3 – blue	slow	750 **	< 2	84	0.16

* Approximate values, ** Measured with 100 mm water column instead of 50 mm

Applications

Grade 589/1 – black

- Fast filtration for coarse and gelatinous precipitates
- Total dry/ash residue as per DIN 38409 H1 and 2
- For food analyses as per §64 LFBG
- Blaine test (cement, directives UNE 80-112-91 and EN-196-6)
- Analyses of beverages as per MEBAK specifications

Grade 589/3 – blue

- For very fine crystalline precipitates
- Analyses of oil/fats: proportion of soluble contaminants
- Ground analyses: Measurement of soluble sulphates
- Collection of samples in medical diagnostics: Allergy testing

Grade 589/5 – red

- For fine crystalline precipitates
- Determination of sulfates, carbonates and organic materials

Grade 589/2 – white

- Medium-fast filtration for coarse precipitates
- For food analyses as per §64 LFBG
- Analysis of alkaline earth carbonates and galvanic baths
- Blaine test (cement, directives UNE 80-112-91 and EN-196-6)
- Analysis of beverages as per MEBAK specifications

Grade 589/4 – yellow

- For very fine crystalline precipitates
- Analysis of oil/fats: proportion of soluble contaminants
- Ground analyses: Measurement of soluble sulphates
- Collection of samples in medical diagnostics: Allergy testing

Grade 589/6 – green

- For fine crystalline precipitates.
- CaC₂O₄, PbSO₄, BaSO₄ (hot-felled precipitates)

The types 589/1 to 589/6 are available as filter circles with the following sizes. Order numbers from page 134. Other sizes, folded filters, sheets and special cuts are available on request.





Hardened, ashless filter papers

Hardened, ashless filter papers (approx. 0.002%) are especially recommended for vacuum and pressure filtration, and for the use of acidic and alkaline solutions.

- Extremely robust owing to the addition of a chemically stable resin (low nitrogen content) that does not significantly contaminate the filtrate
- High resistance to aggressive chemical components, like sulphuric and nitric acids (up to 40% at 50° Celsius) and alkalis (up to 10% at 20° Celsius)
- Acid-washed and rinsed with water to neutralise
- Free of minerals, ideal for the detection of metallic ions

Technical data

Type	Properties	Filtration Herzberg [s]	Retention of particles * [µm]	Weight [g/m ²]	Thickness [mm]
1505	fast	50	12 – 25	88	0.17
1506	medium-fast	170	4 – 12	90	0.16
1507	slow	600 **	≤ 2	90	0.14

* Approximate values, ** Measured with 150 mm water column instead 50 mm

Applications

Grade 1505

- For coarse crystalline precipitates
- Total dry/ash residue as per DIN 38409 H1 and 2
- For food analyses as per §64 LFBG
- Analysis in electroplating: baths of aluminium, chrome and copper

Grade 1507

- For very fine crystalline precipitates
- Gravimetric analyses of fine metals: barium and lead sulphate, nickel and tin sulphide, oxalate and calcium fluoride

Grade 1506

- For fine crystalline precipitates
- Gravimetric determination of metals in acidic/alkaline solutions

Ordering information

The types 1505 to 1507 are available as filter circles and folded filters in various sizes. Order numbers from page 134. Other sizes, folded filters, sheets and special cuts are available on request.



Made from the same raw materials as the quantitative filter papers: Refined cotton linters and cellulose with an α cellulose content of more than 98%. This gives the filter papers a high degree of stability and durability.



Highly pure filter papers for qualitative analysis

Highly pure filter papers (approx. 0.08% ash) are ideal for precise identification of materials and for sample preparation prior to sensitive detection methods

- These papers are perfectly qualified to yield reliable results for food controls as per §64 LFBG, beverage analyses and environmental monitoring
- A large selection of filter circles, folded filters, sheets and rolls is available
- For critical filtering processes, we recommend hardened, ashless filters, which have a greater resistance to both pressure and aggressive chemicals (types: 1573, 1574, 1575, 1577)

Technical data

Type	Properties	Filtration Herzberg [s]	Retention of particles * [µm]	Weight [g/m ²]	Thickness [mm]
604	fast	50	12 – 25	79	0.19
591	medium-fast, thick	90	7 – 12	161	0.35
598	medium-fast, thick	100	8 – 10	139	0.32
597	medium-fast	155	4 – 7	85	0.18
597L	medium-fast	170	4 – 7	81	0.17
595	medium-fast, thin	160	4 – 7	68	0.15
593	medium to slow	450	2 – 5	84	0.17
602h	slow/dense	750 **	2	84	0.16
602eh	very slow/very dense	1500 **	<2	84	0.15

* Approximate values

** Measured with 150 mm water column instead 50 mm

Ordering information

Types 591, 593, 595, 597, 597L, 598, 602h, 602eh and 604 are available as filter circles and folded filters in various sizes. Order numbers from page 134. Other sizes, sheet formats, rolls and special cuts are available on request.





Highly pure filter papers for qualitative analysis

Applications

Grade 604

- For coarse crystalline precipitates
- Sodium chloride in foodstuffs, ferrous hydroxide, aluminium hydroxide and metal sulphide analysis
- Routine cleaning of organic extracts and biological fluids
- For food analyses as per §64 LFBG
- High flow rates in air pollution monitoring and exhaust fumes detection

Grade 597

- For medium-fine, crystalline precipitates
- Calcium oxalate, metal sulphide
- Determination of the fat content of foods as per §64 LFBG (folded) and in milk and dairy products as per DIN 10342
- Preparation of samples and removal of CO₂ in the beverage industry, recommendation by the European Brewery Convention/MEBAK

Grade 595

- For medium-fine, crystalline precipitates
- For determining the overall fat content of food products as per §64 LFBG (folded)
- Determination of the unsaponifiable fraction in fats and oils
- Digestion of solids with aqua regia e.g. for ICP/AAS analysis (folded)

Grade 602h

- For very fine crystalline precipitates
- Determination of the soot content of lubricants (oil condition monitoring, OCM)
- Preparation of samples and removal of CO₂ in the beverage industry, recommendation by the European Brewery Convention/MEBAK

Grade 591

- For medium-fine, crystalline precipitates
- Its thickness enables greater load quantities of solutes
- Determination of water retention in mortar (EN 413-2:1994)

Grade 598

- For fast filtration of medium fine particles
- Its thickness enables a greater particle load

Grade 597L

- Made of 100% ultrapure cotton linters
- For fine particles
- For determining the nitrate content of food products as per §64 LFBG
- Detection of soot in exhaust fumes

Grade 593

- For fine crystalline precipitates
- Barium sulphate (hot), tin sulphide
- Soil analyses

Grade 602eh

- For ultrafine filtration, particle size of <1 µm
- For environmental analysis



These filter papers are ideally qualified for: Food control, beverage analysis and environmental monitoring.



Hardened, highly pure filter papers for qualitative analysis

Hardened highly pure filter papers (approx. 0.05%) with extremely high chemical and mechanical resistance, especially recommended for vacuum and pressure filtration, and for the use of acidic and alkaline solutions

- Extremely robust owing to the addition of a chemically stable resin (low nitrogen content) that does not significantly contaminate the filtrate
- High resistance to aggressive chemical components, like sulphuric and nitric acids (up to 40% at 50° Celsius) and alkalis (up to 10% at 20° Celsius)
- Made of super-refined cotton linters and cellulose with an α cellulose content above 98%, therefore high stability and durability

Technical data

Type	Properties	Filtration Herzberg [s]	Retention of particles * [μ m]	Weight [g/m^2]	Thickness [mm]
1573	fast	50	12 – 25	88	0.17
1574	medium-fast	170	7 – 12	90	0.16
1575	slow	600 **	2	92	0.14
1577	slow	650 **	<2	81	0.12

* Approximate values

** Measured with 150 mm water column instead 50 mm

Applications

Grade 1573

- For coarse crystalline precipitates
- Iron hydroxide, aluminium, chrome, copper sulphate, bismuth, cobalt and iron
- Used as rolls for filtration of biosolids

Grade 1575

- Retention of very fine precipitates, such as barium sulphate, zinc sulphide

Ordering information

The types 1573, 1574, 1575 and 1577 are available as filter circles in various sizes. Order numbers from page 134. Other formats, folded filters, sheet material, rolls and special cuts are available on request.

Grade 1574

- For fine crystalline precipitates
- Calcium oxalate, metal sulphide, barium sulphate and lead molybdate
- Emission controls on atmospheric pollution (sulphur oxide, ammoniac gases, etc.)

Grade 1577

- For very fine precipitates
- Use in filter presses as protective paper



 Hahnemühle

Type GF6 Sorte GF6
Glass Fibre Filter
Inorganisch binder, Filter circles
Glasfaserfilter
anorganischer Binder, Rundfilter
GF 6 025

Ø 25 mm 100 units / Stück
Batch:

Hahnemühle FineArt GmbH
Germany
www.hahnemuehle.com

GF 6 025
Type GF6 Sorte GF6
Glass Fibre Filter

 Hahnemühle

 Hahnemühle





Glass fibre filters

Recommended for controlling both air and water pollution

- Made of 100% micro-borosilicate glass fibres
- Chemically stable in acidic solutions (except hydrofluoric acid) and alkaline solutions in moderate concentrations
- Extremely low metal content
- Maintains its properties up to 500°C
- High flow speed and high permeability to air

Note on use and weight constancy: No relevant changes in weight due to variations in the ambient humidity. Limited bending resistance. Brushing against other surfaces may cause the loss of fibres (keep the filters in their original box until ready to use).

Technical data – including binder

Type	Binder	Retention rate % NaCl-particle size <1 µm*	Filter grade EN 779	Filtration Gurley [s]	Weight [g/m ²]	Thickness [mm]	Max T [°C]
GF 6	inorg.	99.97	H14	40	80	0.35	500
GF 8	inorg.	99		12	75	0.35	500
GF 9	inorg.	99.97	U15	27	70	0.35	500
GF 10	org.	99.97	H13	12	70	0.35	180

* Tested with NaCl particles size <1 µm, main fraction at 0.3 to 0.5 µm

Technical data – excluding binder

Type	Air permeability* (Resistance** mbar) [L/m ² s]	Retention rate % NaCl-particle size <1 µm***	Filter grade EN 779	Filtration Gurley [s]	Weight [g/m ²]	Thickness [mm]	Max T [°C]
GF 50	25	99.97	H14	19	56	0.29	500
GF 51	11	99.993	H13	44	140	1.00	500
GF 52	54**	99.995	U15	25	54	0.28	500
GF 55	<10	99.999	U15	67	75	0.40	500

* as per DIN 53887

** Air resistance at 400 cm³/s, A = 10 cm²

*** Tested with NaCl particles size <1 µm, main fraction at 0.3 to 0.5 µm

Ordering information:

Types GF 6 to GF 55 are available as filter circles in various sizes. Order numbers from page 134. Other sizes, sheet formats, rolls and special cuts are available on request.





Glass fibre filters

Applications

Grade GF 6

- Deposition of (radioactive) aerosols and monitoring of nuclear power plants
- Gravimetric analyses of organic and inorganic impurities in water and waste water according to DIN 38409 and EN 872 (suspended particles). The integrated anorganic binder increases the stability without distorting the gravimetric result during annealing at 500°C in accordance with regulations
- Removal of proteins in beer samples prior to analysis
- Clearing of protein solutions prior to freeze-drying

Grade GF 10

- High mechanical stability
- Suitable as a roll filter in automatic air filter units and air analysers
- Deposition and measurement of soot, oil fume and suspended particles

Grade GF 51

- Biochemical issues like DNA, RNA, proteins and polysaccharides
- Membrane pre-filter to prevent silting
- Elimination of fine particles in solutions for analytical devices

Grade GF 55

- Sample and solvent filtration for HPLC
- Clarification and filtration of proteins, cell cultures, etc.
- Elimination of fine suspended carbon material in liquids to be filtered

Grade GF 8 and GF 9

- Measurement of emission, monitoring of the efficiency of filtration and dedusting, monitoring the combustion air of power plants and of the steel and iron industry
- Gravimetric measurement of dust release in workplace and production processes
- Measurement of the proportion of dust particles in technical gases
- Pre-filtration before use of membranes

Grade GF 50

- Water pollution analysis: Determination of suspended particles as per DIN 38409 and EN 872
- Biochemical issues like DNA, RNA, proteins and polysaccharides
- Determination of suspended particles (SPM and TSP) as per the directive of the US EPA
- Cleaning and buffering solutions and reagents for spectrophotometric measurements

Grade GF 52

- Determination of suspended particles as per European regulations EN 872 and/or standard method 2540 D
- Analysis of carbohydrates, cell cultures
- Scintillation count of DNA, RNA, proteins and polysaccharides
- Clearing of protein solutions prior to freeze-drying



 Hahnemühle



Quartz fibre filters

Recommended filters for atmospheric pollution control and for particles determination at high temperatures.

- Filters made of pure quartz microfibre (SiO_2), free of binding elements or additives
- Ideally suited for trace analysis owing to extremely low metals content
- Excellent stability against chemical solvents, alkalis and acids, even in extreme conditions involving acidic gases (HCl , SO_2 , SO_3 , H_2SO_4 , NO and NO_3); except hydrofluoric acid (HF)
- Usable in temperatures of up to 1000°C

Technical data

Type	Weight [g/m ²]	Thickness [mm]	TSI efficiency % [particles 0.3 µm]	Max T [°C]	Binder
QFH	85	0.45	99.999	900	no

Applications

- Determination of suspended particles (SPM and TSP) in ambient air acc. to the directive of the US EPA (Environmental Protection Agency) and the EN 23210
- Applications that require a maximum filter purity with a low metal content and no carbon traces
- Filtration and analysis of both acid and alkaline gases and of solvents
- Emission: pollution controls performed on air within industrial stacks, smoke ducts and aerosols

Ordering information

The type QFH is available as a filter circle in various sizes. Order numbers from page 134. Other sizes, sheet formats, rolls and special cuts are available on request.



Creped filter papers have a particularly large surface area and correspondingly shorter filtration times.



Universal filter papers for clarifying filtration

Recommended for identification of substances, clarification of liquids and for the preparation of samples in a broad range of chemical analyses

- Made of super-refined cellulose
- Three surfaces: smooth, grained, creped
- For quick separation of large to medium-sized particles
- Available as: plain and folded discs, sheets, cuts and rolls

Technical data

Type	Surface	Properties	Filtration Herzberg [s]	Retention of particles * [µm]	Weight [g/m ²]	Thickness [mm]
1450nf	smooth	fast	50	15 - 25	118	0.30
0860	smooth	medium-fast	120	7 - 12	74	0.17
0859	smooth	medium-fast	150	7 - 12	61	0.14
400	smooth	medium-fast	200	7 - 12	65	0.17
0903	smooth	medium-fast	350	4 - 7	65	0.15
0858	grained	medium-fast	110	7 - 12	75	0.17
0905	crêped	fast	40	12 - 25	74	0.27

* Approximate values

Applications

- Preparation of ordinary samples
- Clarification of:
 - o Alcohols, essences, vinegar, essential oils, extracts
 - o Salt solutions
 - o Electroplating baths, flotation sludge
 - o Gelatin, glycerol, hair tonics, perfumes, tinctures
 - o Paints, lacquers
 - o Beer wort, spirits, syrups
- Used as protection sheet of filter presses

Ordering information

Types 591, 593, 595, 597, 597L, 598, 602h, 602eh and 604 are available as filter circles and folded filters in various sizes. Order numbers from page 134. Other sizes, sheet formats, rolls and special cuts are available on request.

Filter papers for technical and industrial use

We offer our customers in the manufacturing industries an ever-growing range of products. At present, our catalogue contains more than 150 types of technical paper for a wide variety of applications. Our industrial customers rely on our innovative energy and experience in the development process to produce the papers that are required for their production and as finished products for the customers' on going requirements. As a result, the Hahnemühle FineArt GmbH became contract manufacturer and important strategic partner for users of highly pure papers for filtration, as well as chemical and biological analyses.

The market sectors we supply with our technical speciality papers are equally as diverse and efficient as the properties of our papers. The purification and clarification of valuable liquids by using filter papers of consistent high quality are of high priority for several sectors. Customers working in medical engineering and diagnostics, general and luxury foodstock, chemical and pharmaceutical industries, recycling of oils and industrial liquids and electroplating, benefit from the consistent quality of our papers, which remains unchanged from batch to batch.

In addition to filtration, our highly refined filter papers are also valued on account of their absorptive properties. They are suitable as a carrier material for chemicals, a base material or a component of final products. They can also be used as a material in manufacturing other products. Sectors that rely on the properties of these papers include the electronics industry, solar cells manufacturing, adhesive tape manufacturing, medical technology and manufacturers of impregnated papers that emit specific substances to the environment in a controlled manner. Our references include global market leaders from various traditional and innovative branches of the manufacturing and processing industries.

We have developed different types of paper with special properties for a wide range of technical applications. They are well established in their respective fields and achieve optimal filtration.

- Produced from highly refined, natural cellulose and cotton linters, modified cellulose and synthetic fibres, glass microfibre or substitute materials or combinations thereof
- Two surfaces: smooth and creped papers
- Available as filter cards with a thickness of up to 2.1 mm and a weight of up to 850 g/m²





Technical data

	Type	Properties	Filtration Herzberg [s]	Retention of particles * [µm]	Weight [g/m ²]	Thickness [mm]
Smooth	1450nf	very fast, wet strength	50	12 – 15	118	0.30
	604L	fast	12 **	12 – 15	80	0.18
	598	medium-fast, thick	100	8 – 10	140	0.32
	3205	medium-fast	150	5 – 7	95	0.20
	3427	medium-fast, wet strength	26 **	5 – 7	100	0.20
	572	medium-fast, wet strength	160	5 – 7	125	0.28
	597L	medium-fast	170	4 – 7	81	0.17
	508	medium-fast, activated carbon	360	n/a	196	0.52
	BF	medium to slow, wet strength	300	4 – 6	135	0.26
	1577	very slow, very high wet strength, hardened filter	2000	≤2	82	0.12
Creped	520bII	very fast, wet strength, thick	30	15 – 19	135	0.50
	520b	very fast, wet strength, extra thick	30	16 – 20	155	0.65
	3144L	very fast, wet strength, extra thick	30 (4.2 **)	16 – 20	190	0.65
	520a	very fast, wet strength	35	15 – 18	90	0.32
	2772	very fast, wet strength	40	12 – 14	65	0.24
	2410	fast, wet strength	70	9 – 11	107	0.40
	2048	medium-fast, wet strength	135	5 – 8	149	0.65
Card	0048	Cellulose/synthetic, low density high break load	500 ***	n/a	130	0.68
	2282	fast, wet strength, thick	35	15 – 18	440	1.45
	2294	fast, wet strength, thick	55	8 – 15	570	1.50
	2208	fast, wet strength, thick	75 (12 **)	7 – 13	350	0.90
	2589a	medium-fast, wet strength	120	6 – 12	200	0.45
	5703	medium-fast, wet strength	120	6 – 12	240	0.55
	3605	medium-fast, wet strength	120	6 – 12	310	0.80
	2589b	medium-fast, wet strength	220	5 – 10	300	0.60
	2589c	medium to slow, wet strength	320	4 – 8	400	0.75
	22	medium to slow, wet strength, thin	350	3 – 8	180	0.35
	2589d	medium to slow, wet strength, thick	470	2 – 6	500	1.00
	2589e	slow, wet strength, thick	470	2 – 6	610	1.30
	8272	slow, wet strength, thick	600	2 – 4	707	1.50

* Approximate value

** Gurley

*** Air permeability at 50 Pa



Recommendation on filter papers for special applications

The selection of the right filter paper for the intended technical and industrial separation depends on many different factors: these include the volume and the size of the separated particles, volume and temperature of the liquid to filter, as well as the required precision of the filtration result. The individual demands on the filter paper can vary immensely. The chemical and physical nature of the sample has to be considered, as well as the further processing and analysis of the isolated precipitate or clarified filtrate.

Therefore, a closer look at the aims and objectives of the filtration process should be completed before a filtration medium is selected. The following questions will help you find the best filter paper:

- What is filtered?
- What kind of particles are in the liquid/air?
- What is the size of these particles?
- What shall be the maximum particle size in the resulting filtrate?
- What is the pH of the solution/gas?
- What is the temperature during the filtration process?
- Can the temperature be increased?
- What is the viscosity of the solution?
- What is the pressure during the filtration?
- Are the paper sheets mechanically supported in the filter press?
- What is the material of this support?
- How long does the filtration process take?
- How many grams of particle load per square metre of filter paper are expected?
- What additional demands are placed on the filter material?

The use of a special filter paper in certain filtration equipment usually requires a specific paper shape. Paper rolls with various width and lengths, filter circles with centre hole, large sheets with exactly positioned holes for the right fitting into a filter press and specific shapes with a flute or with pleats. All these conversions can be done with our own specific equipment. Please contact us!

Application	Smooth	Creped	Card
Separation of soot particles from air	604L, 597L		
Filtration of unsweetened juice, wine and spirits	572	2048	3605
Filtration of viscous liquids and emulsions (e.g. sweetened viscous juices, spirits and syrups, resin solutions, lacquers, essential oils, essences and plant extracts)	1450nf, 3205	520bII, 520b, 520a, 3144L	
Purification of electroplating baths		520b	2589a
Fine impurities in industrial liquids	1577, 3205	2772	5703, 2208, 2589a-d, 2294, 2282
Filtration of liquids, edible oils, transformer and turbine oils that are difficult to clarify	BF		22
Use in filter presses (protective paper)	1577	2410	
Filtration of tanning solutions and paints, vacuum and pressure filtration and lining larger suction filters	1577		2208
Boiler water filtration and filtration of active carbon particles			2589a-b
Determination of water uptake according to Cobb			5703
Monitoring dye stuffs in the textile industry	1450nf		
Centrifugation in cytological diagnosis			2589c, 2589d
Determination of the whiteness of milk, textile fibres	0048		

Ordering information

The types listed in the table are available in different varieties upon request: sheet material, rolls and special cuts.



Hahnemühle

Type 2095 Sorte 2095

Qualitative Filter Paper
low nitrogen, filter circles

Qualitatives Filterpapier
stickstoffarm, Rundfilter

DP 2095 150

Ø 150 mm 100 units / Stück

Batch: X 125.849

Hahnemühle FineArt GmbH, Hahnstraße 5
37586 Dassel, GERMANY



Hahnemühle

Type 287 Sorte 287

Kieselgur
medium fast, folded filter

Allgemeines Filterpapier
mittelschnell, Faltenfilter

DF 287 240

Ø 240 mm 100 un

Batch :

Hahnemühle Fine/Art
www.hahnemuehle.com





Low nitrogen filter paper

Recommended for filtration of fine precipitates used for further analysis according to Kjeldahl

- Filter paper made from carefully selected raw materials
- Extremely low content of nitrogen, approx. 0.24 mg/240 mm disc

Applications

- Filtration of fine precipitates used to determine nitrogen content
- Determination of fine crystalline precipitates of sulphides of iron and steel alloys

Technical data

Type	Filtration Herzberg [s]	Weight [g/m ²]	Thickness [mm]
2095	650	85	0.17

Ordering information

Type 2095 is available folded filters with 240 mm. Order numbers from page 134. Other sizes, sheet formats, rolls and special cuts are available on request.

Kieselguhr filter paper

Recommended for filtration of the finest semi-colloidal turbidities

- Medium to slow flow rate
- High absorption rate

Applications

- Clarification of extracts of soil suspensions, of milk serum, of starch solutions and sugar-containing solutions prior to polarimetry and refractometry
- For retention of protein precipitates and slime particles from solutions
- Clarification of urine samples

Technical data

Type	Filtration Herzberg [s]	Weight [g/m ²]	Thickness [mm]
287	660	154	0.36

Ordering information

Type 287 is available as filter circles with the following sizes (in mm): 125 – 150 – 185 – 240. Order numbers from page 134. Other formats, filter circles, sheet material, rolls and special cuts are available on request.





Activated carbon filter paper

Recommended for the adsorption of certain molecules in liquids and gases and for the removal of the finest, semi-colloidal turbidities

- Medium flow rate
- High absorption rate
- Minimum of 35% content of activated carbon

Applications

- Clarification of extracts of soil suspensions, of milk serum, of starch solutions and sugar-containing solutions prior to polarimetry and refractometry
- Absorption of iodine 131 from air
- For filtration of electroplating baths

Technical data

Type	Filtration Herzberg [s]	Weight [g/m ²]	Thickness [mm]
508	360	196	0.52

Ordering information

Type 508 is available as filter circles with 110 mm. Order numbers from page 134. Other sizes, sheet formats, rolls and special cuts are available on request.

Black filter paper

Recommended for the detection of very fine traces of light particles and precipitates. The filter paper grade 551 is a technical filter paper made with the addition of black dye. White and light particles can be detected easily after filtration owing to the strong contrast to the black filter paper.

Applications

- Detection of very fine traces of white precipitates and particles
- Detection of traces of silicone/fluorine traces (water drop test)
- Determination of the antiseptic effect of wood preservatives against fungal attack
- Visualisation of mycelial threads from fungi

Technical data

Type	Properties	Filtration Herzberg [s]	Weight [g/m ²]	Thickness [mm]
551	slow, black	850	95	0.20

Ordering information

Type 551 is available as filter circles with the following sizes (in mm): 55 – 70 – 90 – 240. Order numbers from page 134. Other formats, folded filters, sheet material, rolls and special cuts are available on request.



For quantitative analysis in breweries,
the types 589/1 and 589/2 are
recommended



Filter papers for malt and beer analysis

Suitable for analytical methods in breweries to filter and analyse, based upon recommended procedures of the EBC (European Brewery Convention)

- Medium fast filtering
- Ideal for clarification and sample preparation
- Suitable for removing CO₂ and turbidities
- For quantitative analyses in breweries, the types 589/1 and 589/2 are recommended. Technical features of both types are listed in the chapter “Ashless filter papers for quantitative analyses”

Applications

2555: Sample preparation for extract determination of malt
 597: Removal of carbon dioxide and turbidity from cold trub; determination of coagulated proteins (nitrogen) and the grade of fermentation

595: Samples preparation and clarification
 602h: Removal of carbon dioxide and turbidity from beer

Technical data

Type	Surface	Filtration Herzberg [s]	Weight [g/m ²]	Thickness [mm]
2555	grained	110	75	0.17
595	smooth	140	68	0.18
597	smooth	160	85	0.15
602h	smooth	750	84	0.16

Ordering information

The types 2555, 597, 595 and 602h are available as folded filters in various sizes. Order numbers from page 134. Other sizes, folded filters, sheets and special cuts are available on request.

Filter papers for the sugar industry

Recommended for the clarifying filtration of beet extracts and juices prior to analysis

- High filtration speed combined with high retention of particles
- Two surfaces are available: smooth or creped

Applications

- Clarification of dried beet pulp extracts
- Filtration of beet juice after addition of lead acetate for polarimetric sugar determination
- 3459 is recommended for Venema unit according to the sodium acetate method

Technical data

Type	Properties	Filtration Herzberg [s]	Weight [g/m ²]	Thickness [mm]
3459	fast, creped	110	74	0.30
3002	medium, smooth	150	61	0.14

Ordering information

The types 3002 and 3459 are available as filter circles sized 200 or 230 mm. Order numbers from page 134. Other sizes, folded filters, sheets and special cuts are available on request.

High fitting accuracy for all available extraction systems, such as Soxhlet (type 900) and Tecator (type 901).





Cellulose extraction thimbles

For reliable and fast analysis in the areas of food control and environmental monitoring. Suitable for Soxhlet-type, Tecator-type or similar devices, to extract certain components out of solid material with an appropriate solvent

- Made of pure cellulose without added chemicals and a minimum amount of extractable components
- The consistent, high porosity of the thimbles ensures a rapid flow rate.

Wall thickness:

1.3 mm in thimbles with ≤ 35 mm inner diameter

1.7 mm in thimbles with > 35 mm inner diameter

The extraction thimbles are available in 2 versions:

type 900 for Soxhlet and similar extractors

type 901 for Tecator

Applications

- Extraction of fatty/greasy materials in foodstuffs, paints, varnishes and bituminous materials
- Analyses of pesticide waste, poly-aromatic carbohydrates and dioxins in foodstuffs Determination of oil content in oil-bearing seeds
- Extraction of active agents from pharmaceuticals and plastic softening agents

Ordering information

The cellulose thimbles of type 900 and 901 are available in various sizes. Order numbers from page 134. Other sizes, rolls and special cuts are available on request.



 Hahnemühle
Extraction Thimbles
100% borosilicate, free of binder
Extraktionshülsen
100% Borsilikat, ohne Binder
CFV 25 1
25 x 100 mm 25 µ
Batch: HU 123
Hahnemühle Fine
www.hahnemueh

High loading capacity and high air permeability at a high retention rate for small particles of >99% as per BS 4400.



Glass fibre thimbles

Recommended for analysis of particles and aerosols in gases and air

- Made of 100% pure borosilicate microfibres, without binding elements
- Thickness is 1.5 mm (diameter < 33 mm)
- Good stability at high temperatures of up to 500°C in hot, humid or acidic gases

Applications

- Extraction of solvents which are incompatible with cellulose fibres
- Gravimetric collection of dust particles or aerosols from hot air and gas flows
- Extraction during special biochemical analyses

Technical data


Type	Retention rate* [%]	Max. temp. [°C]
CFV	>99	500

* Tested with NaCl particles size <1 µm, maximum of 0.3 to 0.5 µm

Ordering information

The glass fibre thimbles are available in various sizes. Order numbers from page 134. Other sizes, rolls and special cuts are available on request.



 **Mahnenstraße**
Verfahren: Papier
Spezialpapier
Spezial, für Labordiagnostik
Spezial für Standard

BP0024657

High, uniform capillary strength and uniform molecule transfer
Ideal for reliable blotting in medical diagnostic laboratories



Blotting papers

Recommended for blotting techniques with gels

- Made from ultrapure raw materials without additives
- No risk of contamination during the transfer steps of the membranes and gels
- High wet strength for safe handling

Applications

- Southern, northern and western blots; dot and slot blots
- Lifting of sequencing gels
- Lysis/denaturation of colony or plaque lifts

Technical data

Type	Properties	Surface	Thickness [mm]	Weight [g/m ²]
BP002	medium absorbency	smooth	0.35	192
BP003	medium absorbency	smooth	0.90	320
BP005	high absorbency	smooth	1.50	570

Ordering information

Types BP002, BP003 and BP005 are available as sheets. Order numbers from page 134. Other formats and special cuts are available on request.

Meets the directive for carriers of active agents acc. to DIN 58940-2.





Antibiotic test paper

Recommended for identifying pathogens of infectious diseases by determining the degree of resistance against antibiotics as per the Hemmhof method

- Made from ultrapure raw materials without additives
- No interference with the active substances during later incubation
- Consistent thickness ensures a constant absorption volume per disc

Applications

The test discs are impregnated with antibiotics or chemotherapeutic agents, placed on the inoculated nutrient agar and incubated. The size of the inhibition zone is a measurement of the potency of the substances.

Technical data

Type	Weight [g/m ²]	Thickness [mm]	Absorption * [μl]
22	180	0.35	70
2668	320	0.90	215
3324	280	0.73	220

* Measured with water, with 10 assay discs (6 mm in diameter).

Ordering information

The types 22, 2668 and 3324 are available as small, round discs. Order numbers from page 134. Other formats and special cuts are available on request.

The high purity of the filter paper allows for the recovery and reuse of spilled liquids.





Absorbent protective paper with polyethylene layer

This two-ply paper offers total protection of surfaces in the laboratory owing to its cellulose layer for liquid absorption and its waterproof polyethylene layer.

It has a cellulose layer of ultrapure filter paper that absorbs large volumes of liquid and a polyethylene layer that prevents liquids from reaching the protected surface

Applications

- Recommended as a base when working with valuable (precious metals) or dangerous substances (toxic, corrosive, radioactive, alkaline, acids, etc.)
- Hygienic coverage of surfaces in pathology, bacteriology and clinical and radiological laboratories
- Saturating the atmosphere in wet chambers (humidity controls)

Technical data

Type	Weight [g/m ²]	Thickness [mm]	Water absorption [g/m ²]
295PE	120	0.20	110

Ordering information

The type 295PE is produced in sheets and rolls by default. Order numbers from page 134. Other formats and special cuts are available on request.

Thicker papers allow higher sample volumes.
Lower capillary rises offer higher resolutions.





Chromatography papers

Recommended for chromatographic analysis and preparations

- Made from pure linters with an α -cellulose content of > 98%
- High-performance resolution and wet strength
- The fibres run in predominantly one direction

Notes for handling

The absorption is always slightly greater along the linters fibres. The chromatography should be carried out along the direction of the fibres. This is indicated by the 570 or 600 mm long edge of the sheet. Grades "a" and "b" differ in thickness only! The performance in resolution is the same. For two-dimensional chromatography the "b" grades are recommended.

Applications

Analytical breakdown:

- For most chromatographic work: type 2043a, type 2043b
- For evaluation by elution: 2043b

Preparative breakdown:

- Work with larger volumes of a substance: 2668

Technical data


Filter material	Type	Properties	Weight [g/m ²]	Thickness [mm]	Capillary rise * [mm]
Analytical chromatography paper	2043a	medium-fast	90	0.17	105
	2043b	medium-fast	125	0.22	105
Preparatory Chromatography papers	2668	very fast	320	0.90	155 **
Chamber saturation paper	5703	medium-fast	239	0.55	-

* Measures in 30 min.

** Measures in 10 min.

Ordering information

Types 2043a, 2043b, 2668 and 5703 are available as sheets: 460 x 570 mm and 580 x 600 mm. Order numbers from page 134 Other formats and special cuts are available on request.

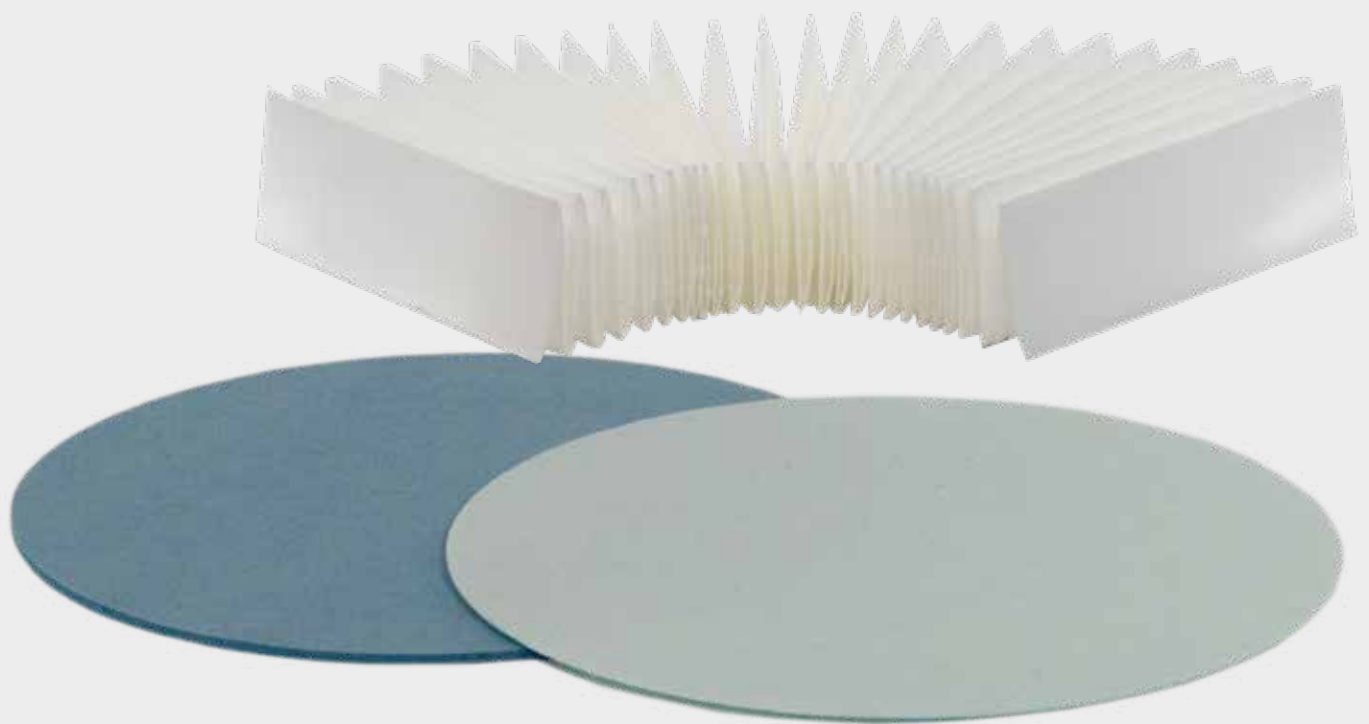

ISTA methods

- TP (top of paper): The seed is placed on one or more layers of paper and then allowed to germinate in a Copenhagen tank, petri dish or incubator.
- BP (between paper): The seeds are placed between two horizontal layers of paper or are rolled up in vertical standing rolls of paper.
- PP (pleated paper): The seeds are placed between the folds of a paper strip folded like a piano accordion. The pleated strips are placed in a plastic box and kept uniformly moist by a surrounding wrapping strip.



Germination test paper

Recommended for the reliable evaluation of seeds. All papers comply with ISTA requirements of 2017.

- All papers are made of pure cellulose and are free from mould, bacteria and any toxic substances which might interfere with the growth of the seeds
- Sufficient moisture is stored for the whole duration of the test. The roots do not penetrate the paper
- The conductivity of the papers is lower than 40 mS/m and the pH is between 6.0 and 7.5
- All seed testing papers meet the ISTA and AOSA requirements. Broad range of papers available for the various germination methods TP, BP and PP
- Pleated strips with exactly 50 double folds ensure optimal water supply and allow a simple identification of the individual seeds
- Coloured papers make it easier to see the delicate, white roots due to higher contrast. The dyes used do not affect seedling growth

Applications

- Types 3014, 3236 and, optionally, 0858: Medium large and coated seeds (sugar beet, fodder beet, grain, sunflower, rapeseed, mustard)
- Grade 3024: Sunflowers
- Grade 3621, 3633, 3645: Seeds with small, white rootlets
- Grade 520b, 5703: Grain (BP method)
- Grade 3014: Very sensitive seeds
- Grade 597, 598, 2048: Small seeds (flowers, grasses)

Technical data

Filter material	Type	Properties	Weight [g/m ²]	Thickness [mm]
TP method	597	for petri dishes, Jacobsen tank	81	0.18
	598	for petri dishes, Jacobsen tank	140	0.32
	520bll	for petri dishes, Jacobsen tank, creped	135	0.53
	3024	white	150	0.35
	3621	blotter, light blue	700	1.45
	3633	blotter, light blue	300	0.65
	3644	blotter, blue	720	1.42
BP method	3645	yellow	165	0.34
	520b	white	155	0.65
	5703	white	239	0.55
PP method	3014	pleated strips, white	110	0.22
	3236	pleated strips, grey	110	0.22
	0858	wrapping strips for pleated strips	75	0.17

Ordering information

Following standard formats are available:

Types 3014, 3236 as pleated strips 110 x 20 x 2000 mm with precisely 50 double folds

Type 0858 as wrapping strips 110 x 580 mm

Types 520b and 5703 as sheets 580 x 580 mm

Order numbers from page 134. Other formats and special cuts are available on request.





Lens cleaning paper

Soft paper free of fibres is recommended for cleaning sensitive, optical surfaces

- Fine, soft and white paper
- No release of fibres
- Silicone-free

Applications

- Cleaning optical lenses, trays, etc.
- As protective paper for microscopic and metallographic sections

Ordering information

The type 310 is available in a standard format of 10 x 15 cm. Order numbers from page 134.

Other formats and special cuts are available on request.

Weighing paper/boats

The smooth surface guarantees the quantitative transfer of the material being weighed without any losses

- Smooth and polished surfaces on both sides
- Removes the need to clean the trays
- It can be used instead of weighing boats

Applications


Useful for weighing and handling of all kinds of solid samples.

Type	Weight g/m ²	Thickness mm	Nitrogen con- tent %
360	25	0.02	0.04

Ordering information

Following standard formats are available: 5 x 5 cm, 10 x 10 cm and 15 x 15 cm

Order numbers from page 134. Other formats and special cuts are available on request.

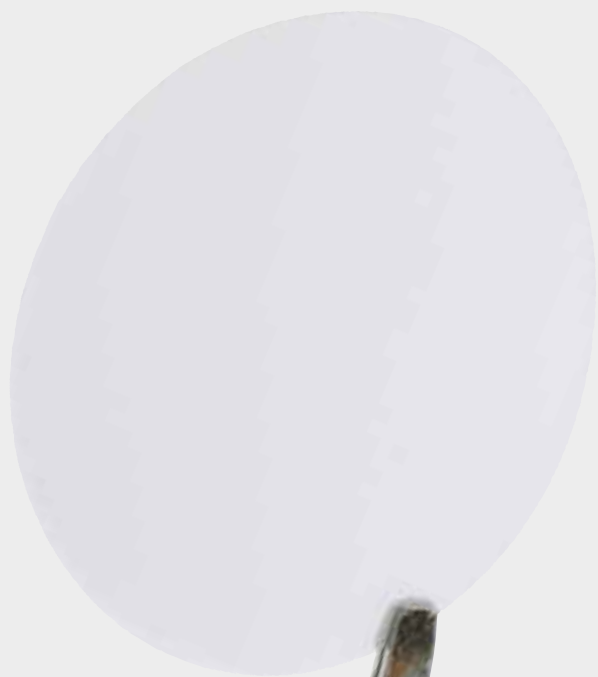



Cellulose acetate membrane filters

Recommended for aqueous samples, biological applications and protein filtration

- Made entirely from pure cellulose acetate, hydrophilic
- High flow rate
- High thermal stability
- Very low non-specific adsorption
- Suited for use in pressure filtration devices
- Suitable for aqueous solutions with pH 4-8, most alcohols, hydrocarbons and oils
- Filter diameters from 25 mm to 50 mm
- Pore sizes 0.2 µm and 0.45 µm

Technical data

Pore size [µm]	Thickness* [µm]	Flow rate** [ml/min]	Bubble pressure*** [bar]
0.2	120	>15	3.5
0.45	120	>35	2.5

- Adsorption: bovine serum albumin < 10 µg/cm²
- Extractables with water less than 1%
- Sterilisation: by autoclaving at 121 °C or 134 °C, with γ-radiation, dry heat or ethylene oxide
- Temperature-resistant up to 180 °C
- The resistance to various chemical solvents is summarised on page 130

* as per DIN 53105

** as per DIN 58355: Average value per cm² area at Δp = 0,9 bar

*** as per DIN 58355

Applications

- Filtration of aqueous solutions for biological and clinical analyses
- Sterilisation of biological solutions (CA-membranes with a pore size of 0.2 µm are specially recommended when the recovery of proteins is critical)
- Filtration of proteins and enzymes
- Biological and clinical analyses
- Sterilisation of culture media (0.2 µm)

Ordering information

The article numbers of the membrane filters are available on page 138. Other versions are available on request.



Sterility Test as per USP:

No growth was observed when sterilised samples were subjected to the Seven Day Sterility Test as described by USP

Microbial test:

- Retention of 10^7 organisms/cm² *Serratia marcescens* ATCC 14756.
- Recovery of Fecal Coliform > 90%



Cellulose nitrate membrane filters

Ideal for clarification and sterilisation of aqueous solutions, microbiological analyses and particle counts

- Made of cellulose nitrate, hydrophilic
- High flow rate and high non-specific adsorption
- Suitable for aqueous solutions (pH 4-8), hydrocarbons and some diluted solvents
- Very uniform pore structure, which ensures homogeneous distribution of the particles retained on the filter surface
- Extractables with water less than 1%
- Available in white or black, gridded (3.1 × 3.1 mm) or plain, sterile or non-sterile

Technical data

Pore size [µm]	Thickness* [µm]	Flow rate** [ml/min]	Bubble pressure*** [bar]
0.2	120	>10	2.7
0.45	120	>20	2.0
0.8	120	>40	1.0

* as per DIN 53105

** as per DIN 58355: Average value per cm² area at Δp = 0,7 bar

*** as per DIN 58355

- Adsorption: 160 µg/cm² for γ-globulin and pore 0.2 µm (decreases with increasing pore size)
- Extractables with water less than 1% to ensure sample purity
- No enhancement or inhibition by the grid lines, due to chemical extractables
- Temperature-resistant up to 130 °C
- Sterilisation: by autoclaving at 121 °C, γ-radiation (25 kGy) or with ethylene oxide
- The resistance to various chemical solvents is summarised on page 130

Applications


- The membranes with a pore size of 0.45 µm are used for micro-organism counts (microbiological analysis)
- Membranes with grid lines are ideal for microbiological analyses (bacterial counts) to detect E.coli, coliform bacteria and other germs in water, pharmaceuticals, beverages, cosmetics, etc.
- Sterilisation of solutions and culture media (0.2 µm) – Keep in mind binding of proteins!
- Pre-filtration, clarification, sterilisation prior to further analyses
- Removal of particles in suspensions to determine the degree of impurity
- Measurement of sewage sludge in clarification plants (0.8 µm)
- Immunological analyses, which allow only a very low level of extractable substances in water
- Analysis of cell solutions

We offer the cellulose nitrate membranes in a broad range of various formats:

- White membranes, used in general laboratory applications
- Black membranes for counts of fungi and yeasts (the higher contrast enables easier counting)
- Gridded membranes (3.1 x 3.1 mm raster, black grid on white membrane or white grid on black membrane) for counts of colonies as a standard method of quantification
- Sterilised membranes (packaged in individual blisters) to ensure that the filter is not contaminated

Ordering information

The article numbers of the membrane filters are available on page 138. Other versions are available on request.

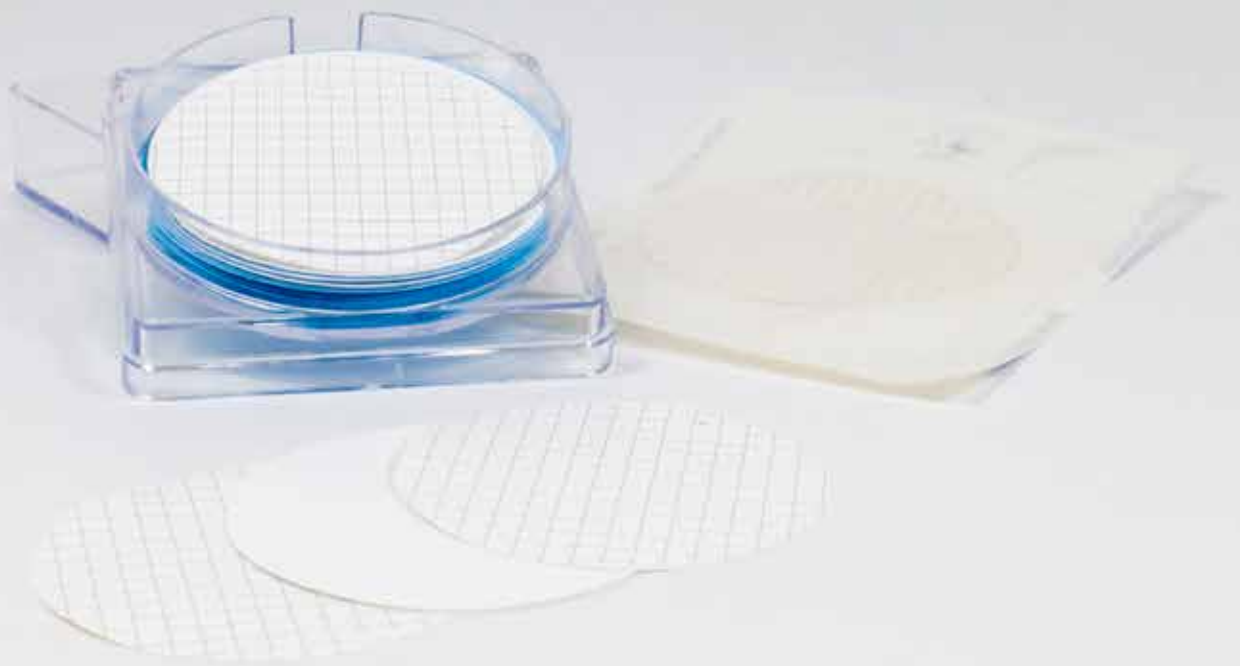

- Ideal for gravimetric measurements, constant weight
- Extractables with water less than 1% to ensure sample purity



Mixed cellulose ester membrane filters

Recommended for clarification and sterilisation of aqueous solutions, microbiological analyses and particle counts

- Made of a blend of cellulose nitrate and cellulose acetate
- High flow rate and high non-specific adsorption
- High mechanical stability
- Suitable for aqueous solutions (pH 4-8), hydrocarbons and some diluted solvents

Technical data

non-sterile membrane filters

Pore size [µm]	Thickness * [µm]	Flow rate ** [ml/min]	Bubble pressure *** [bar]
0.2	130	10	3.5
0.45	130	25	2.0
3	130	100	0.5
5	130	120	0.4
8	130	150	0.2

sterile membrane filters

Pore size [µm]	Thickness * [µm]	Flow rate ** [ml/min]	Bubble pressure *** [bar]
0.2	125	15	3.3
0.45	125	35	1.8

* as per DIN 53105

** as per DIN 58355: Average value per cm² area at Δp = 0,7 bar

*** as per DIN 58355

- Adsorption: 160 µg/cm² for γ-globulin and pore size 0.2 µm (decreases with increasing pore size)
- Sterilisation: by autoclaving at 121 °C, γ-radiation (25 kGy) or with ethylene oxide
- Temperature-resistant up to 180 °C
- The resistance to various chemical solvents is summarised on page 130.

Applications

- The membranes with a pore size of 0.45 µm are used for micro-organism counts (microbiological analyses)
- Membranes with grid lines are ideal for microbiological analyses (bacterial counts) of water, pharmaceuticals, beverages, cosmetics, etc. for the measurement of coliform bacteria and other germs
- Sterilisation of solutions and culture media (0.2 µm) – Keep in mind binding of proteins!
- Pre-filtration, clarification, sterilisation prior to further analyses (0.45 µm)
- Gravimetric measurements, removal of particles in suspensions to determine the degree of impurity (sewage plants etc.)
- Membranes with larger pore sizes (8 µm, 5 µm and 3 µm) are used for chemotaxis and retention of large cells

We offer a broad range of various formats:

- White membranes, used in general laboratory applications
- Sterilised membranes (packaged in individual blisters) ensure that the filter is not contaminated.
- Gridded membranes (3.1 x 3.1 mm raster, black grid on white membrane or white grid on black membrane) for counts of colonies as a standard method of quantification

Sterility Test: No growth was observed when sterilised samples were subjected to the Seven Day Sterility Test as described by USP

Microbial Test:

- Retention of 10⁷ organisms/cm² *Serratia marcescens* ATCC 14756.
- Recovery of Fecal Coliform > 90%.

Ordering information

The article numbers of the membrane filters are available on page 138. Other versions are available on request.



Nylon Membranes are hydrophilic and are perfect for the clarification of buffers and culture media with a low rate of extractables.



Nylon membrane filters

Recommended for filtration, sterilisation and clarifications of mobile phase in HPLC processes with aqueous, alkaline and organic samples

- Made entirely of polyamide (nylon), hydrophilic
- Suitable for many solvents and alkaline solutions, pH range 3-14
- High non-specific adsorption
- High mechanical stability

Technical data

Pore size [µm]	Thickness * [µm]	Flow rate ** [ml/min]	Bubble pressure *** [bar]
0.2	130	>4	3.1
0.45	130	>16	1.5

- Adsorption: bovine serum albumin 100 µg/cm² (for 0.2 µm pore size)
- Extractables with water less than 1%
- Sterilisation: by autoclaving (at 121 °C) or ethylene oxide
- Temperature-resistant up to 134 °C
- The resistance to various chemical solvents is summarised on page 130

* as per DIN 53105

** as per DIN 58355: Average value per cm² area at Δp = 0,9 bar

*** as per DIN 58355

Applications

- Particle removing filtration of water, and aqueous solutions and solvents for HPLC
- Isolating Legionella
- These filters are not recommended for applications such as the sterilisation of cell solutions as they can cause significant loss of tracers. For these applications, preference ought to be given to cellulose acetate (CA-)membranes, which have a low level of adsorption

Ordering information

The article numbers of the membrane filters are available on page 138. Other versions are available on request.





PTFE membranes filters

Recommended for filtration and sterilisation of aggressive organic and inorganic solvents and samples and for venting

- Made entirely of PTFE (polytetrafluorethylene), reinforced by Polypropylene net
- Permanently hydrophobic
- Allowing passage of air even at low differential pressure
- Resistant to almost all chemicals, very strong acids, cryoliquids, alkalis, aggressive organic solvents

Technical data

Pore size [µm]	Thickness * [µm]	Flow rate ** [ml/min]	Bubble pressure *** [bar]
0.2	160	>6	1.0
0.45	160	>30	0.6
5	180	>90	0.1

- Adsorption 8 µg/cm² for γ-globulin (pore size 0.2 µm)
- Extractables with water not detected
- Sterilisation: by autoclaving (at 121 °C or 134 °C) or ethylene oxide
- Temperature-resistant up to 145 °C
- The resistance to various chemical solvents is summarised on page 130

* as per DIN 53105

** as per DIN 58355: Average value per cm² area at Δp = 0,9 bar

*** as per DIN 58355 Isopropanol 60%

Applications

- Filtering chemically aggressive samples
- Clarifying corrosive substances, strong acids and alkalis (0.45 µm)
- Clarification of samples and mobile phases of HPLC (0.45 µm)
- Sterilisation of air and gases (0.2 µm)
- Separation of aqueous aerosols from gases
- Sterile venting of fermentation vessels, tanks and containers (0.2 µm)
- Must be pre-wetted with an organic solvent, such as ethanol, methanol or isopropanol, before filtration of aqueous samples

Ordering information

The article numbers of the membrane filters are available on page 138. Other versions are available on request.

Hahnemühle syringe filters
are HPLC tested





Cellulose acetate syringe filter

Recommended for clarification, purification and sterilisation of aqueous solutions and biological samples

- Cellulose acetate membrane, surfactant-free, hydrophilic
- Low non-specific adsorption ($3.8 \mu\text{g BSA}/\text{cm}^2$)
- Suitable for aqueous solutions (pH 4-8) and most alcohols, carbohydrates and oils
- High flow rates: $0.2 \mu\text{m}$: $16.1 \text{ ml}/\text{min}/\text{cm}^2$; $0.45 \mu\text{m}$: $54.7 \text{ ml}/\text{min}/\text{cm}^2$ (at 10 psi)
- Low dead volume
- Minimum of extractables
- Sterilisation by gamma irradiation or ethylene oxide, autoclaving is not recommended
- The resistance to various chemical solvents is summarised on page 132.

Technical data

Membrane diameter	Case material	Fitting inlet	Fitting outlet	Filter area (cm^2)	Sample volume (ml)	Hold-up volume (μl)	Max. pressure (bar)	Max. Operating Temp. ($^{\circ}\text{C}$)	Method of sterilisation
25 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	4.08	10-100	< 100	6	50	γ -radiation
30 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	5.39	>100	< 200	6	50	γ -radiation

Applications

- Filtration of biological fluids, serum and nutrient media with a minimum loss of proteins owing to very low protein binding to the membrane
- Sterile filtration ($0.2 \mu\text{m}$) and clarification ($0.45 \mu\text{m}$) of nutrient media, biological fluids, cell solution, proteins, enzymes serum or additives
- Separation of virus/bacteria suspension ($0.2 \mu\text{m}$)
- Purification, particulate removal and clarification of liquids ($0.45 \mu\text{m}$)
- HPLC: Preparation of aqueous samples ($0.45 \mu\text{m}$)
- Clinical applications: Sterile filtration of injection solutions ($0.2 \mu\text{m}$)

Ordering information

The article numbers of the membrane filters are available on page 138. Other versions are available on request.





Regenerated cellulose syringe filters

High resistance during filtration and sterilisation of aqueous and organic samples in HPLC and GC applications

- Regenerated cellulose membrane, hydrophilic
- Low protein adsorption
- High flow rate, high throughput volume
- Resistant to almost all solvents and aqueous solutions in pH range 3-12
- Sterilisation by gamma irradiation or ethylene oxide, autoclaving is not recommended
- Low dead volume
- The resistance to various chemical solvents is summarised on page 132.
- Minimum of extractables

Technical data

Membrane diameter	Case material	Fitting inlet	Fitting outlet	Filter area (cm ²)	Sample volume (ml)	Hold-up volume (µl)	Max. pressure (bar)	Max. Operating Temp. (°C)	Method of sterilisation
13 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	1.09	1-10	< 25	6	50	γ-radiation
25 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	4.08	10-100	< 100	6	50	γ-radiation
30 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	5.39	>100	< 200	6	50	γ-radiation

Applications

- Filtration and clarification of small volumes of aqueous, organic and mixed solutions (0.45 µm)
- Sterilisation and clarification of cell and protein solutions and biological fluids without loss of proteins (0.2 µm)
- HPLC: Filtering aqueous and organic solutions prior to sample injection (0.45 µm)
- GC: Preparation of samples (0.45 µm)

Ordering information

The article numbers of the membrane filters are available on page 138. Other versions are available on request.





Nylon syringe filters

Recommended for analytical applications, filtration of samples and solvents for HPLC under non-extreme conditions

- Nylon membrane, hydrophilic
- Suitable for dilute organic solvents (such as acetone, methylene chloride and acetonitrile) and alkaline solutions
- Do not contain wetting agents
- High flow rate and high throughput volume
- Low dead volume
- Sterilisation by gamma irradiation or ethylene oxide, autoclaving is not recommended
- The resistance to various chemical solvents is summarised on page 132.

Technical data

Membrane diameter	Case material	Fitting inlet	Fitting outlet	Filter area (cm ²)	Sample volume (ml)	Hold-up volume (µl)	Max. pressure (bar)	Max. Operating Temp. (°C)	Method of sterilisation
13 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	1.09	1-10	< 25	6	50	γ-radiation
25 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	4.08	10-100	< 100	6	50	γ-radiation
30 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	5.39	>100	< 200	6	50	γ-radiation

Applications

- Filtration and clarification of small volumes prior to injection into HPLC system (0.45 µm)
- Sterilisation of aqueous and dilute organic solvents (0.2 µm)
- HPLC: Filtration of aqueous and organic solvents (0.45 µm)

Ordering information

The article numbers of the membrane filters are available on page 138. Other versions are available on request.

Owing to the colour code of Hahnemühle syringe filters, a mix-up can be excluded:

Orange = cellulose acetate
Light blue = regenerated cellulose
Blue = nylon
Pink = PTFE





PTFE syringe filter

Recommended for HPLC and GC samples, sterilisation and clarification of most solvents and filtration of gases and for sterile venting

- Polytetrafluorethylene (PTFE, Teflon) membrane, hydrophobic
- Very high flow rate
- High chemical resistance to most solvents and acids
- Low dead volume
- Sterilisation by autoclaving at 121°C or by ethylene oxide
- The resistance to various chemical solvents is summarised on page 132.
- Free from wetting agents
- They must be pre-wetted with a polar solvent such as ethanol or isopropanol before filtering aqueous samples

Technical data

Membrane diameter	Case material	Fitting inlet	Fitting outlet	Filter area (cm ²)	Sample volume (ml)	Hold-up volume (µl)	Max. pressure (bar)	Max. Operating Temp. (°C)	Method of sterilisation
13 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	1.09	1-10	< 25	6	50	γ-radiation
25 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	4.08	10-100	< 100	6	50	γ-radiation
30 mm	Polypropylene	Female Luer-Lock	Male Luer-Slip	5.39	>100	< 200	6	50	γ-radiation

Applications

- Sterilisation (0.2 µm) and clarification (0.45 µm) of most acids and aggressive solvents
- Degassing solvents (0.45 µm)
- Venting of sterile containers (0.2 µm)
- Sterilisation of air, gas and aerosol (0.2 µm)
- Tool for protection within vacuum pump (0.2 µm)
- Clarification of small volume samples for HPLC and GC applications, which require greater chemical resistance than regenerated cellulose syringes (0,45 µm)
- Excellent for the sterilisation and clarification of most solvents (such as acetone, dimethyl formamide or DMSO), and of very aggressive or acidic solutions
- Filtration and degassing of solvents prior to analysis (0.45 µm)

Ordering information

The article numbers of the membrane filters are available on page 138. Other versions are available on request.

The optimal filter paper for every application

Residue analysis

Quantitative analysis

Aqueous solutions very acidic/alkaline		Aqueous solutions acidic/alkaline		Air/gases
Pressure/vacuum high	Pressure/vacuum normal	Pressure/vacuum normal		Pressure/vacuum normal
Paper hardened quantitative	Glass microfibre	Paper quantitative	Glass microfibre	Glass/quartz- microfibre
Coarse precipitates (12–25 µm)*, fast: 1505	Colloidal precipitates (1–3 µm)*: GF 50-51-52-55, GF 6-10	Coarse precipitates (12–25 µm)*, fast: 589/1	Colloidal precipitates (1–3 µm)*: GF 50-51-52-55, GF 6-10	Colloidal precipitates (1–3 µm)*: QFH/CFV GF 6-10
Medium-fine precipitates (4–12 µm)*, medium: 1506	Colloidal precipitates (1–3 µm), extreme pH*: QFH	Medium-fine precipitates (4–12 µm)*, medium: 589/2		
Very fine precipitates (≤ 2 µm)*, slow: 1507		Medium-fine precipitates (4–7 µm)*, medium: 589/4		
		Fine precipitates (4 µm)*, medium: 589/5		
		Very fine precipitates (2 µm)*, slow: 589/6		
		Colloidal precipitates (1–2 µm)*, very slow: 589/3		
		Precipitates with nitrates, slow: 2095		

Please use quartz and glass microfibre filter at high pressure with mechanical support only.

*Retention range are approximate values.



Qualitative analysis

Aqueous solutions very acidic/alkaline	Aqueous solutions acidic/alkaline
Pressure/vacuum high	Pressure/vacuum normal
Paper hardened qualitative	Paper qualitative
Coarse precipitates (12–25 µm)*, fast: 1573	Coarse precipitates (12–25 µm)*, fast: 604
Medium-fine precipitates (7–12 µm)*, medium: 1574	Medium-fine precipitates (7–12 µm)*, medium: 591, 598
Very fine precipitates (≤ 2 µm)*, slow: 1575, 1577	Medium-fine precipitates (4–7 µm)*, medium: 597, 595
	Fine precipitates (2–5 µm)*, medium: 593
	Very fine precipitates (2 µm)*, slow: 602h
	Colloidal precipitates (<2 µm)*, very slow: 602eh

Please use quartz and glass microfibre filter at high pressure with mechanical support only.

*Retention range are approximate values.

The optimal filter paper for every application

Filtrate analysis

Removal of particles (sample preparation)				
Aqueous solutions, very acidic/alkaline		Aqueous solutions acidic/alkaline		
Pressure/vacuum high	Pressure/vacuum normal	Pressure/vacuum normal		
Paper hardened qualitative	Glass microfibre	Paper qualitative	Glass microfibre	Paper general
Coarse precipitates (12–25 µm)*, fast: 1573	Colloidal precipitates (1–3 µm)*, medium: GF 51, GF 9	Coarse precipitates (12–25 µm)*, fast: 604	Colloidal precipitates (1–3 µm)*: GF 51, GF 9	Coarse precipitates (12–25 µm)*, fast: 1450nf, 0905
Medium-fine precipitates (7–12 µm)*, medium: 1574	Colloidal precipitates (1–3 µm)*: QFH	Medium-fine precipitates (7–12 µm)*, medium: 591, 598		Medium-fine precipitates (7–12 µm)*, medium: 0860, 0859, 400, 0858
Very fine precipitates (≤ 2 µm)*, slow: 1575, 1577		Medium-fine precipitates (4–7 µm)*, medium: 597, 595		Fine precipitates (4–7 µm)*, medium: 0903
		Fine precipitates (2–5 µm)*, medium: 593		
		Very fine precipitates (2 µm)*, slow: 602h		
		Colloidal precipitates (<2 µm)*, very slow: 602eh		

Please use quartz and glass microfibre filter at high pressure with mechanical support only.


*Retention range are approximate values.



Overview of filtration speeds

	Technical grade	Analytical grade		Quality of the precipitate	Particle size
		qualitative	quantitative		
slow	287	602eh		colloidal	1 μm
		1577	589/3		
		602h, 1575	1507	very fine crystalline	
			589/6		
	2589d				
medium	0903, 2589c	593	589/5		
	BF, 22			fine crystalline	
	2589b				
	572	595, 1574	589/4, 1506		
	3605, 3205	597	589/2		
	0860			medium-fine crystalline	
	2529a, 2048				
	0858, 0859	591, 598			
fast	2208, 2294				
	2410			coarse crystalline, flaky	
	1450nf, 2282	604	589/1		
	2772, 0905	1573	1505		
	520a				
	3744L			gelatinous	
	520b, 520bII				25 μm

The relative position of the individual grades on the μm axis is to be understood as approximate rather than absolute.



Looking for an individual solution?

We would be pleased to develop a product which meets your exact requirements.
Contact us: + 49 5561 791 688 or filtration@hahnemuehle.com



OEM/private label

A number of manufacturers and suppliers from different markets are choosing the high-quality papers from Hahnemühle when selecting their filter papers. Our many years of experience as a filter paper manufacturer and the quality of our products make us a qualified partner.

Supplement your high-quality product range with our reliable products. As an original equipment manufacturer, we are happy to cut papers to the customer's requirements – in the spirit of the “extended workbench”. Our machinery allows us to respond flexibly to finishing requirements; we produce a variety of widths, lengths and formats, in accordance with your specifications.

We take the continuous monitoring of our production systems, narrow tolerances and unique quality just as much for granted as flexibility, customer service and delivery reliability. Our company structure allows us a quick response to customer requirements. All these factors make us an important OEM partner for industry.

Owing to the loyalty to the production site in Dassel, we have access to reliable and highly trained staff. Our customers, as well as our younger generation of employees, benefit from their experience. The interaction and cooperation of several generations is one of our strengths. With the knowledge of our employees and the impetus from our customers, we are constantly performing product optimisations and developing new products.

Please do not hesitate to contact us for further information.



Criteria for selecting the right filter material for filtration processes using membranes and syringe filters

When choosing the optimal membrane, the pore size is a very important variable. Depending on the aim, you should select the best compromise between filtration speed and retention rate:

- 0.2 µm pore size for sterilising liquids and air
- 0.45 µm pore size for clarification or microbiological retention
- 0.8 µm and larger pore size for particle removal and monitoring

The composition of the ingredients of the filtered media must not change by filtration:

- Choose types of membranes with known low unspecific adsorption: cellulose acetate (AC), regenerated cellulose
- For diluted protein solutions, keep the membrane diameter to a minimum to further avoid adsorption.

The syringe filter should not be decomposed by the used solvents:

Please see the overview of chemical compatibilities of the several membranes and syringe filters on pages 130-133. To meet this need, we offer membranes with a broad range of chemical compatibility. All our membranes are made from low extractable polymers to ensure that your filtered solutions do not retain impurities nor any particles. Most of the syringe filters are built with a polypropylene housing, which can stand the use of the usual solvents.

The optimal filter type for every application

Sample	Type of membrane		Benefits of the membrane type
Aqueous solution (hydrophile)	AC	Cellulose acetate	Very low protein binding
	NC	Cellulose nitrate	Broad range of various pore sizes, high protein binding
	MCE	Mixed Cellulose Ester	Constant weight, used for gravimetric analysis

Biological solution (hydrophilic)	AC	Cellulose acetate	Very low protein binding
-----------------------------------	----	-------------------	--------------------------



The syringe filter must have an optimal ratio between speed and hold-up volume:

- We offer syringe filters with various diameters, from 13 mm to 30 mm.

The high particle load of the sample may block the filter membrane or syringe filter:

- To avoid blocking the membrane, you should use a glass fibre filter as a pre-filter. The glass fibre filter GF9 is well accepted as a pre-filter for membranes to prevent the membranes from silting up. GF9 is available in different diameters: 50 mm and 90 mm. Order numbers: GF9050 and GF9090. Other sizes and special cuts are available on request.

The loss of expensive samples or media should be avoided:

- The design of our syringe filters features the lowest possible dead volume.

Minimising the risk of mix-ups between syringe filters:

membrane type and pore size are printed on the housing of the syringe filter. The colour of the edges of the syringe filter stands for a particular type of membrane.

Please contact us, we are happy to advise you:

Telephone: +49 55 61 791 687, Fax: +49 55 61 791 377, filtration@hahnemuehle.com

Sample	Type of membrane		Benefits of the membrane type
Aqueous-organic solution (hydrophilic)	NY	Nylon (polyamide)	Fast wetting, very high mechanical strength (hydrophilic)
Organic solution (hydrophobic)	PTFE	Polytetrafluorethylene	Used for very strong acids and bases
Gases, even strongly oxidising	PTFE	Polytetrafluorethylene	Used for very strong acids and bases



Quality Management

Hahnemühle strives to offer products and services that consistently meet our customers' requirements and expectations. We use a strict quality management system to achieve this goal.

The DEKRA certification confirms that Hahnemühle complies with the standards of DIN EN ISO 9001. The use of our quality management system guarantees a high quality standard and a competitive position in international markets that have increasingly stringent quality requirements.

The certification further documents our intense customer focus, which covers every stage of the value chain from product development to the provision of services. Ongoing further product development and process improvements allow us to exceed the required quality standards.

Product manufacturers and quality assurance institutions must measure the performance and quality of a product in a wide range of applications in order to verify its suitability. ISO/EN standards, guidelines of shareholder associations, and state agencies specify the processes and tools for each application alongside the thresholds that must be observed. Hahnemühle filter papers provide a high degree of security.

Hahnemühle syringe filters and membranes are subject to stringent quality controls during and after production. The storage life of the finished products in the warehouse is constantly monitored. Each filter holder must also undergo the following five tests:

Bubble point, burst pressure, membrane absorption, flow rate and extractable substances.

Hahnemühle has been a "brand of the century" since 2016. It is part of the exclusive circle of Germany's strongest brands.



Test methods

- **Ash content** as per DIN 54370
Weighing the ash content of 10 g sample at 900 °C (only quantitative and qualitative filter papers).
- **Separating performance** as per BS 4400 (only for glass fibre filters)
Sodium chloride aerosols with a particle size $< 1\mu\text{m}$ (maximum for 0.3 – 0.5 μm) are applied to a paper. Any aerosol passing through the paper is defined as photometric. Inflow velocity: 3 m/min.
- **Breaking load** (breaking resistance)
Stability property of a paper under tensile stress. A 15 mm wide and 100 mm long test strip is subjected to an increasing vertical load. The maximum force at the moment of tearing is the tensile strength. It is determined for the cross and machine direction of the paper.
- **Cobb-Test** (water absorption capacity, g /m²)
Test used to determine the amount of water absorbed after 10 minutes by the surface of a 100 cm² large test sample under pre-assigned conditions. EN ISO 535.
- **Thickness** (mm)
Thickness is determined using a meter (test area = 2 cm²). As per EN ISO 534, the surface pressure averages 25 kPa
- **Iron** (mg /100 g)
DIN 54374.
- **Grammage** (g /m²)
A 100 cm² sample is weighed. EN ISO 536.
- **Gurley** (s)
Time is recorded for 100 ml of air to pass through the sample at a certain pressure and 1.56 cm² sample area. ASTM-D726.
- **Resins and oils** (mg/100 g)
Determination of dichloromethane soluble matter. ISO 624.
- **Herzberg flow rate test** (s)
Test to determine flow rate using 100 ml pre-filtered distilled water (20°C) applied to the test filter (effective area 10 cm²) at a constant hydrostatic head.
- **Copper** (mg /100 g)
DIN 54375.
- **Porosity** (L/m² s)
Determination of apparent porosity with a pressure differential of 2 mbar and a test area of 20 cm². EN ISO 9237
- **Wet tensile** (mm, water column)
Determined by continuously increasing a water column over a test area of 14.5 cm² until the paper bursts. Plant standard.
- **pH value** – hot extract
A sample of 5 g is leached for 1 h with 250 ml of boiling distilled water and the pH value in the extract is measured using a glass electrode after cooling down to 20°C. DIN 53124.
- **Suction lift** as per Klemm (mm)
Determination of capillary rise by measuring the wet part of a paper strip (15 x 250 mm) immersed in pre-filtered water (20°C) after 10 or 30 minutes. DIN ISO 8787.
- **Water absorption** (g /m²)
Determination by differential weighing of a sample with a surface area of 100 cm². (Weight 2 - weight 1) x 100 = water absorption
Weight 1 = dry weight
Weight 2 = weight after immersing the test sample in distilled water for 1 minute and removing the excess surface water. Plant standard.
- **Whiteness** (%)
Determination of CIE whiteness viewed under the CIE D65 daylight illuminant at an angle of 10°. $\lambda = 460 \text{ nm}$.



Parameters and testing methods

Test Criteria	Description	Units
Pore size	One dry membrane filter and one wetted with a special liquid are subjected to continuously increasing pressure in a Coulter Porometer; in both cases, the air flow through the membrane is measured.	μm
Bubble point DIN 58355 part 2 ASTM F 316	The membrane filter is wetted completely with water or isopropanol (PTFE membranes) and a continuously increasing pressure is applied to the inlet side until air bubbles appear at the outlet side. The bubble point correlates directly with the pore size and can be used to check the integrity of the filter.	bar
Water flow as per DIN 58355 part 1	The time taken for a certain amount of pre-filtered, deionised water (or ethanol for PTFE filters) to pass through the membrane filter is determined at a vacuum of 0.9 bar.	$\text{ml}/\text{min}/\text{cm}^2$
Air flow rate	The time taken for the filtration of a defined volume of air (e.g. 100 ml) at a pressure of 3 mbar through a filter area of 6.45 cm^2 .	$\text{ml}/\text{min}/\text{cm}^2$
Thickness	The determination is carried out using callipers with 2 cm^2 jaws and a contact pressure of 0.1 bar ($100 \text{ g}/\text{cm}^2$).	μm
Wetting	A membrane filter with a diameter of 50 mm is placed on water. The time taken for it to become completely wetted is measured.	s



Test Criteria	Description	Units
Burst pressure DIN 53 141 part 1	A 10 cm ² membrane sample is stretched over a rubber membrane. A constantly increasing force is applied and the pressure at the moment of bursting is measured.	bar
Extractable components (Weight loss) DIN 58 355 part 6	A membrane filter is weighed, placed in boiling water for 30 minutes, dried and then reweighed. The loss in weight is a measure of the extractable component fraction.	%
Bacterial challenge test DIN 58 355 part 3 ASTM D 3863 C	A medium containing test bacteria is filtered through the membrane filter (micro-organism density 10 ⁷ microorganisms/cm ³). After an incubation period of 72 hours the filtrate must show no signs of bacterial growth. Test bacteria: 0.15 µm - <i>Burkholderia cepacia</i> 0.2 µm - <i>Brevundimonas diminuta</i> 0.45 µm - <i>Serratia marcescens</i>	Optical evaluation (Turbidity)
Checking the sterilisation method with bio-indicators as per DIN 58 948 Teil 8	During the sterilisation process test strips with living bacterial spores are applied to the individually packed membranes. These are then incubated in a nutrient solution. After 7 days, no turbidity (= bacterial growth) should be visible. Test spores: Ethylene oxide gas exposure: <i>Bacillus subtilis</i> γ-sterilisation: <i>Bacillus pumilus</i>	Optical evaluation (Turbidity)

Chemical resistance – membranes

Membrane	AC	NC	MCE	NY	PTFE
STERILISATION					
Ethylene oxide	++	++	++	++	++
Gamma irradiation	++	++	++	-	-
Autoclaving 121 °C, 30 minutes	++	++	++	++	++
SOLVENTS					
Acetone	-	-	-	++	++
Acetonitrile	-	n/a	n/a	n/a	++
Gasoline	+	++	++	++	++
Benzene	+	++	++	++	++
Benzyl alcohol	-	+	+	++	++
N-Butyl acetate	-	-	-	++	++
n-Butanol	+	++	++	++	++
Cellosolve	-	-	-	++	++
Chloroform	-	++	++	++	++
Cyclohexane	+	+	+	++	++
Cyclohexanone	+	-	-	++	++
Diethylacetamide	-	-	-	++	++
Diethyl ether	+	-	-	++	++
Dimethyl formamide	-	-	-	+	++
Dimethylsulfoxide	-	-	-	++	++
Dioxane	-	-	-	++	++
Ethanol, 98%	+	-	-	++	++
Ethyl acetate	-	-	-	++	++
Ethylene glycol	+	+	+	++	++
Formamide	-	-	-	++	++
Glycerin	+	++	++	++	++
n-Heptane	+	++	++	++	++
n-Hexane	+	++	++	++	++
Isobutanol	+	+	+	++	++
Isopropanol	+	+	+	++	++
Isopropyl acetate	-	-	-	++	++
Methanol, 98%	-	-	-	++	++
Methyl acetate	-	-	-	++	++
Methylen chloride	-	+	n/a	++	++
Methyl ethyl ketone	-	-	n/a	++	++
Methyl isobutyl ketone	-	-	n/a	++	++
Monochlorobenzene	-	++	n/a	++	++
Nitrobenzene	-	+	n/a	+	++
n-Pentane	+	++	++	++	++
Perchloroethylene	-	++	++	++	++
Pyridine	-	-	-	++	++
Carbon tetrachloride	-	++	++	++	++



Membrane	AC	NC	MCE	NY	PTFE
Tetrahydrofuran	-	-	-	++	++
Toluene	+	++	++	++	++
Trichlorethane	-	++	++	++	++
Trichlorethylene	+	++	++	++	++
Xylene	+	++	++	++	++
ACIDS					
Acetic acid, 25%	+	+	+	-	++
Acetic acid, 80%	-	-	-	-	++
Hydrofluoric acid, 25%	-	+	-	-	++
Hydrofluoric acid, 50%	-	+	-	-	++
Perchloric acid, 25%	-	+	+	-	++
Phosphoric acid, 25%	+	+	+	-	++
Phosphoric acid, 86%	+	+	+	-	++
Nitric acid, 30%	-	+	+	-	++
Nitric acid, 65%	-	-	-	-	++
Hydrochloric acid, 15%	+	+	+	-	++
Hydrochloric acid, 20%	-	-	-	-	++
Sulphuric acid, 25%	-	-	+	-	++
Sulphuric acid, 98 %	-	-	-	-	++
Trichloroacetic acid, 25%	-	+	+	-	++
BASES					
Ammonia, 1 N	-	++	++	++	++
Ammonium hydroxide, 25%	+	-	+	++	++
Potassium hydroxide, 25%	-	-	-	+	++
Sodium hydroxide, 32%	-	-	-	+	++
Sodium hydroxide, 1N	-	-	-	++	++
AQUEOUS SOLUTIONS					
Formalin, 30%	++	++	++	++	++
Sodium hypochlorite, 5%	-	+	-	-	++
Hydrogen peroxide, 35%	-	++	-	-	++
pH RANGE					
pH 1-14	-	-	-	-	++
pH 1-13	-	-	-	+	++
pH 3-14	-	-	-	+	++
pH 3-12	-	-	-	++	++
pH 4-8	++	++	++	++	++

Legend

compatible	++	not compatible	-
limited compatibility	+	not analysed	n/a

Contact time: 24 h at 20 °C

Chemical compatibilities can be influenced by various factors. Therefore, we recommend that you confirm compatibility with the liquid you want to filter by performing a trial filtration run before you start your actual filtration.

Chemical resistance – syringe filters

Membrane		AC	CR	NY	PTFE
Housing	PP				
STERILISATION					
Ethylene oxide	++	++	++	++	++
Gamma irradiation	-	++	-	-	-
Autoclaving 121°C, 30 minutes	++	+	+	+	++
SOLVENTS					
Acetone	++	-	++	++	++
Acetonitrile	++	-	++	++	++
Gasoline	++	++	++	++	++
Benzyl alcohol	+	+	+	++	++
n-Butanol	++	+	++	++	++
Chloroform	++	-	++	++	++
Cyclohexane	+	+	+	++	++
Cyclohexanone	+	-	+	++	++
Diethylacetamide	++	-	++	++	++
Diethyl ether	++	+	++	++	++
Dimethylformamide	+	-	+	+	++
Dimethylsulfoxide	++	-	++	++	++
Dioxane	++	-	++	++	++
Ethanol, 98%	+	+	+	++	++
Ethylene glycol	++	++	++	++	++
Glycerine	+	+	+	++	++
n-Hexane	+	+	+	++	++
Isopropanol	++	+	++	++	++
n-Propanol	++	+	++	++	++
Isopropyl acetone	++	+	++	++	++
Methanol, 98%	+	+	+	++	++
Methylene chloride	++	-	++	+	++
Methyl ethyl ketone	+	-	+	++	++
Methyl isobutyl ketone	+	-	+	-	++
Monochlorobenzene	+	+	+	++	++
Perchloroethylene	++	-	++	++	++
Propylene glycol	++	+	+	++	++
Pyridine	++	-	++	++	++
Carbon tetrachloride	-	-	-	++	++
Tetrahydrofuran	++	-	++	++	++
Toluene	++	-	++	++	++
Trichlorethylene	++	++	++	++	+
Xylene	+	++	+	++	++
ACIDS					
Formic acid	+	+	-	-	++
Acetic acid, 25%	+	-	+	++	++



Membrane		AC	CR	NY	PTFE
Housing	PP				
Acetic acid, 80%	+	-	+	+	++
Phosphoric acid, 25%	+	-	-	-	++
Nitric acid, 25 %	+	-	-	-	++
Hydrochloric acid, 25 %	+	-	-	-	++
Sulphuric acid, 25%	++	-	+	-	++
Sulphuric acid, 98 %	+	-	-	-	++
Trichloroacetic acid, 25%	+	-	+	-	++
BASES					
Ammonium hydroxide, 25%	+	-	+	++	++
Sodium hydroxide, 32%	+	-	-	++	++
AQUEOUS SOLUTIONS					
Formalin, 30%	+	+	+	++	++
Sodium hypochlorite, 5%	+	-	-	-	++
Hydrogen peroxide, 35%	++	+	-	++	++
pH RANGE					
pH 1-14	++	-	-	-	++
pH 1-13	++	-	-	-	++
pH 3-14	++	-	+	++	++
pH 3-12	++	-	++	++	++
pH 4-8	++	++	++	++	++

Legend

compatible	++	not compatible	-
limited compatible	+	not analysed	n/a

Contact time: 24 h at 20 °C

Chemical compatibilities can be influenced by various factors. Therefore, we recommend that you confirm compatibility with the liquid you want to filter by performing a trial filtration run before you start your actual filtration.

Order numbers: Filter papers

Type	Format	Pack size	Order number	Type	Format	Pack size	Order number
0858	Sheet 110 x 580 mm	500 pc.	08581158	2555	Folded filters, 185 mm	100 pc.	DF2555185
0858	Folded filters, 150 mm	100 pc.	DF0858150	2555	Folded filters, 240 mm	100 pc.	DF2555240
0858	Folded filters, 185 mm	100 pc.	DF0858185	2555	Folded filters, 320 mm	100 pc.	DF2555320
0858	Folded filters, 240 mm	100 pc.	DF0858240	2589C	25 x 75 mm, two holes (6 mm)	200 pc.	2589C2575
0858	Folded filters, 320 mm	100 pc.	DF0858320	2589D	25 x 75 mm, two holes (6 mm)	200 pc.	2589D2575
0859	Sheet, 580 mm x 580 mm	500 pc.	RM08595858	2668	Round plates, 6 mm	1000 pc.	A2668060
0860	Sheet, 450 mm x 450 mm	500 pc.	RM08604545	2668	Round plates, 9 mm	1000 pc.	A2668090
0860	Folded filters, 150 mm	100 pc.	DF0860150	2668	Sheet 580 x 600 mm	50 pc.	26685860
0860	Folded filters, 185 mm	100 pc.	DF0860185	2772	Folded filters, 500 mm	100 pc.	DF2772500
0860	Folded filters, 320 mm	100 pc.	DF0860320	287	Folded filters, 125 mm	100 pc.	DF287125
0860	Folded filters, 600 mm	50 pc.	DF0860600	287	Folded filters, 150 mm	100 pc.	DF287150
0903	Sheet, 580 mm x 580 mm	500 pc.	RM09035858	287	Folded filters, 185 mm	100 pc.	DF287185
0905	Sheet, 580 mm x 580 mm	500 pc.	RM09055858	287	Folded filters, 240 mm	100 pc.	DF287240
0905	Folded filters, 320 mm	100 pc.	DF0905320	295PE	Roll 460 mm x 50 m	1 pc.	55335865
1505	Filter circles, 110 mm	100 pc.	DP1505110	295PE	Roll 1200mm x 50 m	1 pc.	55335874
1505	Filter circles, 125 mm	100 pc.	DP1505125	295PE	Sheet 460 x 570 mm	100 pc.	55335885
1505	Filter circles, 150 mm	100 pc.	DP1505150	3002	Filter circles, 200 mm	1000 pc.	DP3002200
1506	Filter circles, 125 mm	100 pc.	DP1506125	3014	110 mm x 2 m, 50 double folds, 20 mm height	1008 pc.	301411200
1506	Filter circles, 150 mm	100 pc.	DP1506150	3014	110 mm x 2 m, 50 double folds, 20 mm height	306 pc.	301411200V300
1506	Filter circles, 240 mm	100 pc.	DP1506240	310	10 x 15 cm	6 x 100 pc.	3101015
1507	Filter circles, 125 mm	100 pc.	DP1507125	3236	110 mm x 2 m, 50 double folds, 20 mm height	1008 pc.	323611200
1507	Filter circles, 150 mm	100 pc.	DP1507150	3324	Round plates, Ø 6 mm	1000 pc.	A3324060
1507	Filter circles, 185 mm	100 pc.	DP1507185	3459	Filter circles, 230 mm	100 pc.	DP3459230
1573	Folded filters, 125 mm	100 pc.	DF1573125	360	5 x 5 cm	500 pc.	3600505
1573	Folded filters, 185 mm	100 pc.	DF1573185	360	10 x 10 cm	500 pc.	3601010
1573	Folded filters, 240 mm	100 pc.	DF1573240	360	15 x 15 cm	500 pc.	3601515
1573	Filter circles, 90 mm	100 pc.	DP1573090	400	Filter circles, 47 mm	100 pc.	DP400047
1573	Filter circles, 125 mm	100 pc.	DP1573125	400	Filter circles, 55 mm	100 pc.	DP400055
1573	Filter circles, 150 mm	100 pc.	DP1573150	400	Filter circles, 70 mm	100 pc.	DP400070
1573	Filter circles, 185 mm	100 pc.	DP1573185	400	Filter circles, 90 mm	100 pc.	DP400090
1573	Filter circles, 240 mm	100 pc.	DP1573240	400	Filter circles, 110 mm	100 pc.	DP400110
1574	Sheet 460 x 570 mm	100 pc.	15744657	400	Filter circles, 125 mm	100 pc.	DP400125
1574	Filter circles, 47 mm	100 pc.	DP1574047	400	Filter circles, 130 mm	100 pc.	DP400130
1574	Filter circles, 70 mm	100 pc.	DP1574070	400	Filter circles, 150 mm	100 pc.	DP400150
1574	Filter circles, 90 mm	100 pc.	DP1574090	400	Filter circles, 185 mm	100 pc.	DP400185
1574	Filter circles, 110 mm	100 pc.	DP1574110	400	Filter circles, 200 mm	100 pc.	DP400200
1574	Filter circles, 150 mm	100 pc.	DP1574150	400	Filter circles, 250 mm	100 pc.	DP400250
1574	Filter circles, 240 mm	100 pc.	DP1574240	400	Filter circles, 500 mm	100 pc.	DP400500
1575	Filter circles, 55 mm	100 pc.	DP1575055	400	Sheet 460 x 570 mm	100 pc.	4004657
1575	Filter circles, 70 mm	100 pc.	DP1575070	400	Folded filters, 70 mm	100 pc.	DF400070
1575	Filter circles, 110 mm	100 pc.	DP1575110	400	Folded filters, 90 mm	100 pc.	DF400090
1575	Filter circles, 125 mm	100 pc.	DP1575125	400	Folded filters, 100 mm	100 pc.	DF400100
1575	Filter circles, 150 mm	100 pc.	DP1575150	400	Folded filters, 110 mm	100 pc.	DF400110
1575	Filter circles, 240 mm	100 pc.	DP1575240	400	Folded filters, 125 mm	100 pc.	DF400125
2043A	Sheet 460 x 570 mm	100 pc.	2043A4657	400	Folded filters, 130 mm	100 pc.	DF400130
2043A	Sheet 580 x 600 mm	100 pc.	2043A5860	400	Folded filters, 150 mm	100 pc.	DF400150
2043B	Sheet 460 x 570 mm	100 pc.	2043B4657	400	Folded filters, 185 mm	100 pc.	DF400185
2095	Folded filters, 240 mm	100 pc.	DF2095240	400	Folded filters, 200 mm	100 pc.	DF400200
22	Round plates, 6 mm	1000 pc.	A22060	400	Folded filters, 300 mm	100 pc.	DF400300
22	Round plates, 9 mm	1000 pc.	A22090	400	Folded filters, 320 mm	100 pc.	DF400320



Type	Format	Pack size	Order number	Type	Format	Pack size	Order number
400	Folded filters, 400 mm	100 pc.	DF400400	589/4	Filter circles, 150 mm	100 pc.	DP5894150
400	Folded filters, 500 mm	100 pc.	DF400500	589/5	Filter circles, 55 mm	100 pc.	DP5895055
400	Folded filters, 650 mm	100 pc.	DF400650	589/5	Filter circles, 90 mm	100 pc.	DP5895090
508	Filter circles, 110 mm	100 pc.	DP508110	589/5	Filter circles, 110 mm	100 pc.	DP5895110
520a	Folded filters, 185 mm	100 pc.	DF520a185	589/5	Filter circles, 125 mm	100 pc.	DP5895125
520a	Folded filters, 240 mm	100 pc.	DF520a240	589/5	Filter circles, 150 mm	100 pc.	DP5895150
520a	Folded filters, 500 mm	100 pc.	DF520a500	593	Folded filters, 110 mm	100 pc.	DF593110
520b	Sheet 580 x 580 mm	100 pc.	520b5858	593	Folded filters, 125 mm	100 pc.	DF593125
520b	Folded filters, 150 mm	100 pc.	DF520b150	593	Folded filters, 150 mm	100 pc.	DF593150
520b	Folded filters, 185 mm	100 pc.	DF520b185	593	Folded filters, 185 mm	100 pc.	DF593185
520b	Folded filters, 240 mm	100 pc.	DF520b240	593	Folded filters, 240 mm	100 pc.	DF593240
520b	Folded filters, 500 mm	20 pc.	DF520b500	593	Filter circles, 90 mm	100 pc.	DP593090
520b	Folded filters, 600 mm	20 pc.	DF520b600	593	Filter circles, 125 mm	100 pc.	DP593125
520bll	Filter circles, 90 mm	100 pc.	DP520bll090	593	Filter circles, 150 mm	100 pc.	DP593150
551	Filter circles, 55mm	100 pc.	DP551055	593	Filter circles, 185 mm	100 pc.	DP593185
551	Filter circles, 70mm	100 pc.	DP551070	593	Filter circles, 320 mm	100 pc.	DP593320
551	Filter circles, 90mm	100 pc.	DP551090	595	Sheet 580 x 580 mm	100 pc.	5955858
551	Filter circles, 240mm	100 pc.	DP551240	595	Folded filters, 90 mm	100 pc.	DF595090
5703	Sheet 580 x 580 mm	100 pc.	57035858	595	Folded filters, 110 mm	100 pc.	DF595110
589/1	Filter circles, 47 mm	100 pc.	DP5891047	595	Folded filters, 125 mm	100 pc.	DF595125
589/1	Filter circles, 55 mm	100 pc.	DP5891055	595	Folded filters, 150 mm	100 pc.	DF595150
589/1	Filter circles, 70 mm	100 pc.	DP5891070	595	Folded filters, 185 mm	100 pc.	DF595185
589/1	Filter circles, 90 mm	100 pc.	DP5891090	595	Folded filters, 240 mm	100 pc.	DF595240
589/1	Filter circles, 110 mm	100 pc.	DP5891110	595	Folded filters, 270 mm	100 pc.	DF595270
589/1	Filter circles, 125 mm	100 pc.	DP5891125	595	Folded filters, 320 mm	100 pc.	DF595320
589/1	Filter circles, 150 mm	100 pc.	DP5891150	595	Folded filters, 385 mm	100 pc.	DF595385
589/1	Filter circles, 185 mm	100 pc.	DP5891185	595	Folded filters, 500 mm	100 pc.	DF595500
589/1	Filter circles, 240 mm	100 pc.	DP5891240	595	Filter circles, 47 mm	100 pc.	DP595047
589/2	Filter circles, 12.5 mm	1000 pc.	DP58920125	595	Filter circles, 55 mm	100 pc.	DP595055
589/2	Filter circles, 12.7 mm	1000 pc.	DP58920127	595	Filter circles, 70 mm	100 pc.	DP595070
589/2	Filter circles, 40.5 mm	100 pc.	DP58920405	595	Filter circles, 90 mm	100 pc.	DP595090
589/2	Filter circles, 55 mm	100 pc.	DP5892055	595	Filter circles, 110 mm	100 pc.	DP595110
589/2	Filter circles, 70 mm	100 pc.	DP5892070	595	Filter circles, 125 mm	100 pc.	DP595125
589/2	Filter circles, 90 mm	100 pc.	DP5892090	595	Filter circles, 150 mm	100 pc.	DP595150
589/2	Filter circles, 110 mm	100 pc.	DP5892110	595	Filter circles, 185 mm	100 pc.	DP595185
589/2	Filter circles, 125 mm	100 pc.	DP5892125	595	Filter circles, 240 mm	100 pc.	DP595240
589/2	Filter circles, 150 mm	100 pc.	DP5892150	597	Sheet 580 x 580 mm	100 pc.	5975858
589/2	Filter circles, 185 mm	100 pc.	DP5892185	597	Folded filters, 90 mm	100 pc.	DF597090
589/3	Filter circles, 47 mm	100 pc.	DP5893047	597	Folded filters, 110 mm	100 pc.	DF597110
589/3	Filter circles, 55 mm	100 pc.	DP5893055	597	Folded filters, 125 mm	100 pc.	DF597125
589/3	Filter circles, 70 mm	100 pc.	DP5893070	597	Folded filters, 150 mm	100 pc.	DF597150
589/3	Filter circles, 90 mm	100 pc.	DP5893090	597	Folded filters, 185 mm	100 pc.	DF597185
589/3	Filter circles, 110 mm	100 pc.	DP5893110	597	Folded filters, 240 mm	100 pc.	DF597240
589/3	Filter circles, 125 mm	100 pc.	DP5893125	597	Folded filters, 270 mm	100 pc.	DF597270
589/3	Filter circles, 150 mm	100 pc.	DP5893150	597	Folded filters, 320 mm	100 pc.	DF597320
589/3	Filter circles, 185 mm	100 pc.	DP5893185	597	Folded filters, 385 mm	100 pc.	DF597385
589/3	Filter circles, 240 mm	100 pc.	DP5893240	597	Filter circles, 47 mm	100 pc.	DP597047
589/4	Filter circles, 90 mm	100 pc.	DP5894090	597	Filter circles, 55 mm	100 pc.	DP597055
589/4	Filter circles, 110 mm	100 pc.	DP5894110	597	Filter circles, 70 mm	100 pc.	DP597070
589/4	Filter circles, 125 mm	100 pc.	DP5894125	597	Filter circles, 90 mm	100 pc.	DP597090

Order numbers: Filter papers

Type	Format	Pack size	Order number	Type	Format	Pack size	Order number
597	Filter circles, 110 mm	100 pc.	DP597110	900	Ø 22 x 100 mm	25 pc.	90022100
597	Filter circles, 125 mm	100 pc.	DP597125	900	Ø 25 x 60 mm	25 pc.	90025060
597	Filter circles, 150 mm	100 pc.	DP597150	900	Ø 25 x 70 mm	25 pc.	90025070
597	Filter circles, 185 mm	100 pc.	DP597185	900	Ø 25 x 80 mm	25 pc.	90025080
597	Filter circles, 240 mm	100 pc.	DP597240	900	Ø 25 x 100 mm	25 pc.	90025100
597	Filter circles, 320 mm	100 pc.	DP597320	900	Ø 28 x 60 mm	25 pc.	90028060
598	Sheet 460 x 570 mm	100 pc.	5984657	900	Ø 28 x 80 mm	25 pc.	90028080
598	Folded filters, 90 mm	100 pc.	DF598090	900	Ø 28 x 100 mm	25 pc.	90028100
598	Folded filters, 110 mm	100 pc.	DF598110	900	Ø 30 x 80 mm	25 pc.	90030080
598	Folded filters, 125 mm	100 pc.	DF598125	900	Ø 30 x 100 mm	25 pc.	90030100
598	Folded filters, 150 mm	100 pc.	DF598150	900	Ø 33 x 60 mm	25 pc.	90033060
598	Folded filters, 185 mm	100 pc.	DF598185	900	Ø 33 x 80 mm	25 pc.	90033080
598	Folded filters, 240 mm	100 pc.	DF598240	900	Ø 33 x 90 mm	25 pc.	90033090
598	Filter circles, 90 mm	100 pc.	DP598090	900	Ø 33 x 94 mm	25 pc.	90033094
598	Filter circles, 110 mm	100 pc.	DP598110	900	Ø 33 x 100 mm	25 pc.	90033100
602eh	Folded filters, 110 mm	100 pc.	DF602eh110	900	Ø 33 x 118 mm	25 pc.	90033118
602eh	Folded filters, 125 mm	100 pc.	DF602eh125	900	Ø 33 x 130 mm	25 pc.	90033130
602eh	Folded filters, 150 mm	100 pc.	DF602eh150	900	Ø 33 x 205 mm	25 pc.	90033205
602eh	Folded filters, 185 mm	100 pc.	DF602eh185	900	Ø 35 x 150 mm	25 pc.	90035150
602eh	Folded filters, 320 mm	100 pc.	DF602eh320	900	Ø 40 x 100 mm	25 pc.	90040100
602eh	Filter circles, 125 mm	100 pc.	DP602eh125	900	Ø 40 x 123 mm	25 pc.	90040123
602eh	Filter circles, 240 mm	100 pc.	DP602eh240	900	Ø 40 x 150 mm	25 pc.	90040150
602h	Folded filters, 90 mm	100 pc.	DF602090	900	Ø 43 x 123 mm	25 pc.	90043123
602h	Folded filters, 110 mm	100 pc.	DF602110	901	Ø 26 (OD) x 60 mm (length)	25 pc.	90126060
602h	Folded filters, 125 mm	100 pc.	DF602125	BP002	460 mm x 570 mm	100 pc.	BP0024657
602h	Folded filters, 150 mm	100 pc.	DF602150	BP002	580mm x 600mm	100 pc.	BP0025860
602h	Folded filters, 185 mm	100 pc.	DF602185	BP003	580mm x 600mm	50 pc.	BP0035860
602h	Folded filters, 240 mm	100 pc.	DF602240	BP005	580mm x 600mm	25 pc.	BP0055860
602h	Folded filters, 320 mm	100 pc.	DF602320	CFV	Ø 19 x 90 mm	25 pc.	CFV19090
602h	Filter circles, 70 mm	100 pc.	DP602070	CFV	Ø 22 x 80 mm	25 pc.	CFV22080
602h	Filter circles, 90 mm	100 pc.	DP602090	CFV	Ø 25 x 100 mm	25 pc.	CFV25100
602h	Filter circles, 110 mm	100 pc.	DP602110	CFV	Ø 26 x 60 mm	25 pc.	CFV26060
602h	Filter circles, 125 mm	100 pc.	DP602125	CFV	Ø 30 x 100 mm	25 pc.	CFV30100
602h	Filter circles, 150 mm	100 pc.	DP602150	CFV	Ø 33 x 94 mm	25 pc.	CFV33094
602h	Filter circles, 240 mm	100 pc.	DP602240	CFV	Ø 43 x 123 mm	25 pc.	CFV43123
604	Folded filters, 90 mm	100 pc.	DF604090	GF10	Filter circles, 47 mm	100 pc.	GF10047
604	Folded filters, 110 mm	100 pc.	DF604110	GF10	Filter circles, 100 mm	100 pc.	GF10100
604	Folded filters, 125 mm	100 pc.	DF604125	GF50	Filter circles, 25 mm	100 pc.	GF50025
604	Folded filters, 150 mm	100 pc.	DF604150	GF50	Filter circles, 37 mm	100 pc.	GF50037
604	Folded filters, 185 mm	100 pc.	DF604185	GF50	Filter circles, 47 mm	100 pc.	GF50047
604	Folded filters, 240 mm	100 pc.	DF604240	GF50	Filter circles, 50 mm	100 pc.	GF50050
604	Folded filters, 320 mm	100 pc.	DF604320	GF50	Filter circles, 70 mm	100 pc.	GF50070
604	Filter circles, 55 mm	100 pc.	DP604055	GF50	Filter circles, 90 mm	100 pc.	GF50090
604	Filter circles, 90 mm	100 pc.	DP604090	GF50	Filter circles, 125 mm	100 pc.	GF50125
604	Filter circles, 110 mm	100 pc.	DP604110	GF50	Sheet , 203 mm x 254 mm	100 pc.	GF50203254
604	Filter circles, 125 mm	100 pc.	DP604125	GF51	Filter circles, 47 mm	100 pc.	GF51047
604	Filter circles, 150 mm	100 pc.	DP604150	GF52	Filter circles, 47 mm	100 pc.	GF52047
604	Filter circles, 185 mm	100 pc.	DP604185	GF52	Filter circles, 50 mm	100 pc.	GF52050
900	Ø 19 x 90 mm	25 pc.	90019090	GF52	Filter circles, 70 mm	100 pc.	GF52070
900	Ø 22 x 80 mm	25 pc.	90022080	GF52	Filter circles, 90 mm	100 pc.	GF52090



Type	Format	Pack size	Order number
GF52	Filter circles, 110 mm	100 pc.	GF52110
GF55	Filter circles, 47 mm	100 pc.	GF55047
GF6	Filter circles, 25 mm	100 pc.	GF6025
GF6	Filter circles, 47 mm	100 pc.	GF6047
GF6	Filter circles, 50 mm	100 pc.	GF6050
GF6	Filter circles, 55 mm	100 pc.	GF6055
GF6	Filter circles, 70 mm	100 pc.	GF6070
GF6	Filter circles, 90 mm	100 pc.	GF6090
GF6	Filter circles, 100 mm	100 pc.	GF6100
GF6	Filter circles, 125 mm	100 pc.	GF6125
GF6	Filter circles, 185 mm	100 pc.	GF6185
GF8	Filter circles, 90 mm	100 pc.	GF8090
GF8	Round filter, 60 x 90 mm	100 pc.	GF86090
GF9	Filter circles, 50 mm	100 pc.	GF9050
GF9	Filter circles, 90 mm	100 pc.	GF9090
QFH	Filter circles, 47 mm	50 pc.	QFH047
QFH	Filter circles, 150 mm	50 pc.	QFH150
QFH	Sheet , 203 mm x 254 mm	50 pc.	QFH203254

Order numbers:

Membrane filters

Type	Format	Pack size	Order number
Cellulose acetate	0.2 µm, non-sterile, white, 25 mm	100 pc.	AC02025BL
Cellulose acetate	0.2 µm, non-sterile, white, 47 mm	100 pc.	AC02047BL
Cellulose acetate	0.45 µm, non-sterile, white, 25 mm	100 pc.	AC04525BL
Cellulose acetate	0.45 µm, non-sterile, white, 47 mm	100 pc.	AC04547BL
Cellulose acetate	0.45 µm, non-sterile, white, 50 mm	100 pc.	AC04550BL
Mixed Cellulose Ester	0.2 µm, sterile, white, net, 47 mm	100 pc.	MCE02047BC
Mixed Cellulose Ester	0.2 µm, sterile, white, net, 50 mm	100 pc.	MCE02050BC
Mixed Cellulose Ester	0.45 µm, sterile, white, net, 47 mm	100 pc.	MCE04547BC
Mixed Cellulose Ester	0.45 µm, sterile, white, net, 50 mm	100 pc.	MCE04550BC
Mixed Cellulose Ester	0.2 µm, non-sterile, white, 50 mm	100 pc.	MCE02050BL
Mixed Cellulose Ester	0.45 µm, non-sterile, white, net, 50 mm	100 pc.	MCE04550NC
Mixed Cellulose Ester	0.45 µm, non-sterile, white, 25 mm	100 pc.	MCE04525BL
Mixed Cellulose Ester	0.45 µm, non-sterile, white, net, 47 mm	100 pc.	MCE04547BC
Mixed Cellulose Ester	0.45 µm, non-sterile, white, 47 mm	100 pc.	MCE04547BL
Mixed Cellulose Ester	0.45 µm, non-sterile, white, net, 50 mm	100 pc.	MCE04550BC
Mixed Cellulose Ester	3 µm, non-sterile, white, 47 mm	100 pc.	MCE30047BL
Mixed Cellulose Ester	5 µm, non-sterile, white, 47 mm	100 pc.	MCE50047BL
Mixed Cellulose Ester	8 µm, non-sterile, white, 47 mm	100 pc.	MCE80047BL
Cellulose nitrate	0.2 µm, sterile, white, 47 mm	100 pc.	NCS02047BC
Cellulose nitrate	0.45 µm, non-sterile, black, net, 47 mm	100 pc.	NCS04547NC
Cellulose nitrate	0.45 µm, non-sterile, black, net, 50 mm	100 pc.	NCS04550NC
Cellulose nitrate	0.45 µm, sterile, white, net, 47 mm	100 pc.	NCS04547BC
Cellulose nitrate	0.45 µm, sterile, white, 47 mm	100 pc.	NCS04547BL
Cellulose nitrate	0.2 µm, non-sterile, white, 25 mm	100 pc.	NC02025BL
Cellulose nitrate	0.2 µm, non-sterile, white, 47 mm	100 pc.	NC02047BL
Cellulose nitrate	0.2 µm, non-sterile, white, 50 mm	100 pc.	NC02050BL
Cellulose nitrate	0.45 µm, non-sterile, white, 25 mm	100 pc.	NC04525BL
Cellulose nitrate	0.45 µm, non-sterile, white, net, 47 mm	100 pc.	NC04547BC
Cellulose nitrate	0.45 µm, non-sterile, white, 47 mm	100 pc.	NC04547BL
Cellulose nitrate	0.45 µm, non-sterile, white, 50 mm	100 pc.	NC04550BL
Cellulose nitrate	0.8 µm, non-sterile, white, 47 mm	100 pc.	NC08047BL
Cellulose nitrate	0.8 µm, non-sterile, white, 50 mm	100 pc.	NC08050BL
Nylon	0.2 µm, non-sterile, white, 47 mm	100 pc.	NY02047BL
Nylon	0.45 µm, non-sterile, white, 47 mm	100 pc.	NY04547BL
PTFE	0.2 µm, non-sterile, white, 25 mm	100 pc.	PT02025BL
PTFE	0.2 µm, non-sterile, white, 47 mm	100 pc.	PT02047BL
PTFE	0.45 µm, non-sterile, white, 25 mm	100 pc.	PT04525BL
PTFE	0.45 µm, non-sterile, white, 47 mm	100 pc.	PT04547BL
PTFE	5 µm, non-sterile, white, 47 mm	100 pc.	PT50047BL
PTFE	5 µm, non-sterile, white, 90 mm	25 pc.	PT50090BL

Syringe filters

Type	Format	Pack size	Order number
Cellulose acetate	0.2 µm, sterile, 25 mm	50 pc.	SACS0202550
Cellulose acetate	0.2 µm, sterile, 30 mm	50 pc.	SACS0203050
Cellulose acetate	0.45 µm, sterile, 25 mm	50 pc.	SACS0452550
Cellulose acetate	0.45 µm, sterile, 30 mm	50 pc.	SACS0453050
Cellulose acetate	0.2 µm, sterile, 25 mm	100 pc.	SAC02025100
Cellulose acetate	0.45 µm, non-sterile, 25 mm	100 pc.	SAC04525100
Cellulose acetate	0.45 µm, non-sterile, 25 mm	500 pc.	SAC04525500
Cellulose acetate	0.45 µm, non-sterile, 30 mm	100 pc.	SAC04530100
Cellulose acetate	0.45 µm, non-sterile, 30 mm	500 pc.	SAC04530500
Nylon	0.2 µm, non-sterile, 13 mm	100 pc.	SNY02013100
Nylon	0.2 µm, non-sterile, 25 mm	100 pc.	SNY02025100
Nylon	0.2 µm, non-sterile, 25 mm	500 pc.	SNY02025500
Nylon	0.45 µm, non-sterile, 13 mm	100 pc.	SNY04513100
Nylon	0.45 µm, non-sterile, 25 mm	100 pc.	SNY04525100
Nylon	0.45 µm, non-sterile, 25 mm	500 pc.	SNY04525500
PTFE	0.2 µm, non-sterile, 13 mm	100 pc.	SPT02013100
PTFE	0.2 µm, non-sterile, 25 mm	100 pc.	SPT02025100
PTFE	0.45 µm, non-sterile, 13 mm	100 pc.	SPT04513100
PTFE	0.45 µm, non-sterile, 25 mm	100 pc.	SPT04525100
PTFE	0.45 µm, non-sterile, 25 mm	500 pc.	SPT04525500
PTFE	0.45 µm, non-sterile, 30 mm	100 pc.	SPT04530100
Regenerated Cellulose	0.2 µm, non-sterile, 13 mm	100 pc.	SCR02013100
Regenerated Cellulose	0.2 µm, non-sterile, 25 mm	100 pc.	SCR02025100
Regenerated Cellulose	0.45 µm, non-sterile, 13 mm	100 pc.	SCR04513100
Regenerated Cellulose	0.45 µm, non-sterile, 25 mm	100 pc.	SCR04525100
Regenerated Cellulose	0.45 µm, non-sterile, 30 mm	100 pc.	SCR04530100



Order number index

Order number	Page	Order number	Page	Order number	Page	Order number	Page
3101015	99	A22060	91	DF400200	73	DF602320	61
3600505	99	A22090	91	DF400300	73	DF602eh110	61
3601010	99	A2668060	91	DF400320	73	DF602eh125	61
3601515	99	A2668090	91	DF400400	73	DF602eh150	61
4004657	73	A3324060	91	DF400500	73	DF602eh185	61
5955858	61	AC02025BL	101	DF400650	73	DF602eh320	61
5975858	61	AC02047BL	101	DF520a185	75	DF604090	61
5984657	61	AC04525BL	101	DF520a240	75	DF604110	61
08581158	73	AC04547BL	101	DF520a500	75	DF604125	61
15744657	65	AC04550BL	101	DF520b150	75	DF604150	61
26685860	95	BP0024657	89	DF520b185	75	DF604185	61
55335865	93	BP0025860	89	DF520b240	75	DF604240	61
55335874	93	BP0035860	89	DF520b500	75	DF604320	61
55335885	93	BP0055860	89	DF520b600	75	DP1505110	59
57035858	97	CFV19090	87	DF593110	61	DP1505125	59
90019090	85	CFV22080	87	DF593125	61	DP1505150	59
90022080	85	CFV25100	87	DF593150	61	DP1506125	59
90022100	85	CFV26060	87	DF593185	61	DP1506150	59
90025060	85	CFV30100	87	DF593240	61	DP1506240	59
90025070	85	CFV33094	87	DF595090	61	DP1507125	59
90025080	85	CFV43123	87	DF595110	61	DP1507150	59
90025100	85	DF0858150	73	DF595125	61	DP1507185	59
90028060	85	DF0858185	73	DF595150	61	DP1573090	65
90028080	85	DF0858240	73	DF595185	61	DP1573125	65
90028100	85	DF0858320	73	DF595240	61	DP1573150	65
90030080	85	DF0860150	73	DF595270	61	DP1573185	65
90030100	85	DF0860185	73	DF595320	61	DP1573240	65
90033060	85	DF0860320	73	DF595385	61	DP1574047	65
90033080	85	DF0860600	73	DF595500	61	DP1574070	65
90033090	85	DF0905320	73	DF597090	61	DP1574090	65
90033094	85	DF1573125	65	DF597110	61	DP1574110	65
90033100	85	DF1573185	65	DF597125	61	DP1574150	65
90033118	85	DF1573240	65	DF597150	61	DP1574240	65
90033130	85	DF2095240	79	DF597185	61	DP1575055	65
90033205	85	DF2555185	83	DF597240	61	DP1575070	65
90035150	85	DF2555240	83	DF597270	61	DP1575110	65
90040100	85	DF2555320	83	DF597320	61	DP1575125	65
90040123	85	DF2772500	75	DF597385	61	DP1575150	65
90040150	85	DF287125	79	DF598090	61	DP1575240	65
90043123	85	DF287150	79	DF598110	61	DP3002200	83
90126060	85	DF287185	79	DF598125	61	DP3459230	83
301411200	97	DF287240	79	DF598150	61	DP400047	73
323611200	97	DF400070	73	DF598185	61	DP400055	73
2043A4657	95	DF400090	73	DF598240	61	DP400070	73
2043A5860	95	DF400100	73	DF602090	61	DP400090	73
2043B4657	95	DF400110	73	DF602110	61	DP400110	73
2589C2575	75	DF400125	73	DF602125	61	DP400125	73
2589D2575	75	DF400130	73	DF602150	61	DP400130	73
301411200V300	97	DF400150	73	DF602185	61	DP400150	73
520b5858	73	DF400185	73	DF602240	61	DP400185	73

Order number index

Order number	Page	Order number	Page	Order number	Page	Order number	Page
DP400200	73	DP593320	61	GF52090	67, 69	PT50090BL	109
DP400250	73	DP595047	61	GF52110	67, 69	QFH047	71
DP400500	73	DP595055	61	GF55047	67, 69	QFH150	71
DP508110	81	DP595070	61	GF6025	67, 69	QFH203254	71
DP520b11090	75	DP595090	61	GF6047	67, 69	RM08595858	73
DP551055	81	DP595110	61	GF6050	67, 69	RM08604545	73
DP551070	81	DP595125	61	GF6055	67, 69	RM09035858	73
DP551090	81	DP595150	61	GF6070	67, 69	RM09055858	73
DP551240	81	DP595185	61	GF6090	67, 69	SAC02025100	111
DP5891047	57	DP595240	61	GF6100	67, 69	SAC04525100	111
DP5891055	57	DP597047	61	GF6125	67, 69	SAC04525500	111
DP5891070	57	DP597055	61	GF6185	67, 69	SAC04530100	111
DP5891090	57	DP597070	61	GF8090	67, 69	SAC04530500	111
DP5891110	57	DP597090	61	GF86090	67, 69	SACS0202550	111
DP5891125	57	DP597110	61	GF9050	67, 69	SACS0203050	111
DP5891150	57	DP597125	61	GF9090	67, 69	SACS0452550	111
DP5891185	57	DP597150	61	MCE02050BL	105	SACS0453050	111
DP5891240	57	DP597185	61	MCE04525BL	105	SCR02013100	113
DP58920125	57	DP597240	61	MCE04547BC	105	SCR02025100	113
DP58920127	57	DP597320	61	MCE04547BL	105	SCR04513100	113
DP58920405	57	DP598090	61	MCE04550BC	105	SCR04525100	113
DP5892055	57	DP598110	61	MCE04550NC	105	SCR04530100	113
DP5892070	57	DP602070	61	MCE30047BL	105	SNY02013100	115
DP5892090	57	DP602090	61	MCE50047BL	105	SNY02025100	115
DP5892110	57	DP602110	61	MCE80047BL	105	SNY02025500	115
DP5892125	57	DP602125	61	MCES02047BC	105	SNY04513100	115
DP5892150	57	DP602150	61	MCES02050BC	105	SNY04525100	115
DP5892185	57	DP602240	61	MCES04547BC	105	SNY04525500	115
DP5893047	57	DP602eh125	61	MCES04550BC	105	SPT02013100	117
DP5893055	57	DP602eh240	61	NC02025BL	103	SPT02025100	117
DP5893070	57	DP604055	61	NC02047BL	103	SPT04513100	117
DP5893090	57	DP604090	61	NC02050BL	103	SPT04525100	117
DP5893110	57	DP604110	61	NC04525BL	103	SPT04525500	117
DP5893125	57	DP604125	61	NC04547BC	103	SPT04530100	117
DP5893150	57	DP604150	61	NC04547BL	103		
DP5893185	57	DP604185	61	NC04550BL	103		
DP5893240	57	GF10047	67, 69	NC08047BL	103		
DP5894090	57	GF10100	67, 69	NC08050BL	103		
DP5894110	57	GF50025	67, 69	NCS02047BC	103		
DP5894125	57	GF50037	67, 69	NCS04547BC	103		
DP5894150	57	GF50047	67, 69	NCS04547BL	103		
DP5895055	57	GF50050	67, 69	NCS04547NC	103		
DP5895090	57	GF50070	67, 69	NCS04550NC	103		
DP5895110	57	GF50090	67, 69	NY02047BL	107		
DP5895125	57	GF50125	67, 69	NY04547BL	107		
DP5895150	57	GF50203254	67, 69	PT02025BL	109		
DP593090	61	GF51047	67, 69	PT02047BL	109		
DP593125	61	GF52047	67, 69	PT04525BL	109		
DP593150	61	GF52050	67, 69	PT04547BL	109		
DP593185	61	GF52070	67, 69	PT50047BL	109		



Type index

Type	Page	Type	Page
0048	75	3469	49, 51
0858	73	3605	75
0859	73	3621	97
0860	73	3633	97
0903	73	3644	97
0905	73	3645	97
22	75	5703	75, 95
287	79	8272	75
310	99	1450nf	75
360	99	2043a	49, 95
400	73	2043b	95
508	81	23SL	49, 51
551	81	2589a	75
572	75	2589b	75
591	61	2589c	75
593	61	2589d	75
594	61	2589e	75
595	61	295PE	93
597	61	3144L	75
598	75	520a	75
604	61	520b	75
900	85	520bII	75
1505	59	589/1	57
1506	59	589/2	57
1507	59	589/3	57
1573	65	589/4	57
1574	65	589/5	57
1575	65	589/6	57
1577	65	597L	49, 75
2048	75	597nf	49, 51
2095	79	602eh	61
2208	75	602h	61
2282	75	604L	75
2294	75	BF	75
2316	49	BP002	49, 89
2316	51	BP003	49, 89, 95
2410	75	BP005	49, 89
2555	83	CFV	87
2668	49, 91, 95	GF10	67
2727	49	GF50	67
2772	75	GF51	49, 67
2992	49	GF52	67
3002	83	GF53	67
3014	97	GF55	49, 67
3024	97	GF6	67
3205	75	GF8	67
3236	97	GF9	67
3324	49, 91	QFH	71
3427	75		
3459	83		



Hahnemühle

Hahnemühle FineArt GmbH

Hahnestrasse 5

D-37586 Dassel

Fax: + 49 55 61 79 13 77

filtration@hahnemuehle.com

Sales area

Germany, Austria,

Switzerland and the Netherlands:

Phone: + 49 5561 791 687

Sales area

Rest of Europe and other countries:

Phone: + 49 5561 791 688

United Kingdom, Ireland:

Hahnemühle FineArt UK

Suite 5, St. Mary's Court

Carleton Forehoe

Norwich, NR9 4AL

Phone: + 44 (0) 845 3300 129

Fax: + 44 (0) 1603 757 915

ukfiltration@hahnemuehle.com

www.hahnemuehle.com