


# TraceGOLD TG-WaxMS GC Columns

Manufactured for better column-to-column reproducibility

- Polar phase, polyethylene glycol
- Polar-deactivated surface tightly binds polymer for excellent thermal stability
- Resists oxidative damage, damage from strongly acidic or basic volatiles better than silicone solid phases

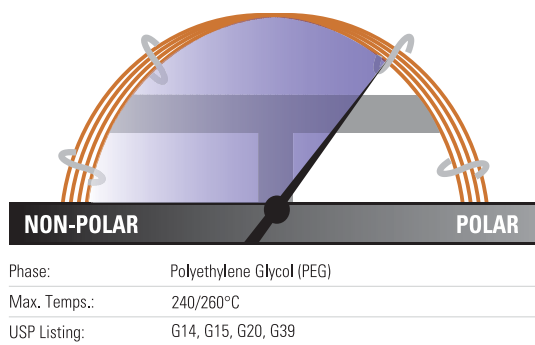

## TraceGOLD TG-WaxMS GC Columns

ID (mm)	Length (m)	Film Thickness (µm)	Cat. No.	Quantity	
0.0	10	0.1	<b>26088-0200</b>	1 Each	
0.15	10	0.15	<b>26088-2750</b>	1 Each	
	20	0.15	<b>26088-2760</b>	1 Each	
	40	0.15	<b>26088-2940</b>	1 Each	
0.18	20	0.18	<b>26088-5780</b>	1 Each	
0.25	15	0.25	<b>26088-1300</b>	1 Each	
		0.25	<b>26088-1420</b>	1 Each	
	30	0.5	<b>26088-2230</b>	1 Each	
		0.25	<b>26088-1421</b>	1 Each	
		0.25	<b>26088-1540</b>	1 Each	
		0.5	<b>26088-2350</b>	1 Each	
0.32	15	0.25	<b>26088-1310</b>	1 Each	
		0.5	<b>26088-2120</b>	1 Each	
		1.0	<b>26088-2850</b>	1 Each	
	30	0.25	<b>26088-1430</b>	1 Each	
		0.5	<b>26088-2240</b>	1 Each	
		1.0	<b>26088-2970</b>	1 Each	
		30m with 5m SafeGuard	0.25	<b>26088-1435</b>	1 Each
		60	0.25	<b>26088-1550</b>	1 Each
			0.5	<b>26088-2360</b>	1 Each
	1.0		<b>26088-3090</b>	1 Each	
	0.53	15	0.5	<b>26088-2130</b>	1 Each
			1.0	<b>26088-2860</b>	1 Each
30			0.25	<b>26088-1440</b>	1 Each
60		0.5	<b>26088-2250</b>	1 Each	
		1.0	<b>26088-2980</b>	1 Each	
		1.5	<b>26088-3360</b>	1 Each	
		0.25	<b>26088-1560</b>	1 Each	
		0.5	<b>26088-2370</b>	1 Each	
		1.0	<b>26088-3100</b>	1 Each	

### Applications:

- FAMES
- Flavor compounds and essential oils
- Solvents
- Xylene isomers
- EPA Method 603 for Acrolein/ Acrylonitrile

### Similar to:

- DB-WAX
- DB-WAXetr
- HP-Wax
- HP-Innowax
- Supelcowax 10
- CP-Wax 52 CB
- Stabilwax
- Rtx-Wax
- BP20
- ZB-Wax
- Optima Wax
- AT-Wax

## TraceGOLD TG-WaxMT Metal GC Columns

ID (mm)	Length (m)	Film Thickness (µm)	Cat. No.	Quantity
0.25	30	0.25	<b>26M88-1420</b>	1 Each
		0.5	<b>26M88-2230</b>	1 Each
	60	0.25	<b>26M88-1540</b>	1 Each
0.53	30	0.25	<b>26M88-1440</b>	1 Each
		0.5	<b>26M88-2250</b>	1 Each
		1.0	<b>26M88-2880</b>	1 Each
		1.5	<b>26M88-3360</b>	1 Each